mecc alte

Totally Focused. Totally Independent.

Technical Specification

NPE34 4 C

DDS
Dynamic Data Support

The world's largest independent producer of alternators 1 – 5,000kVA

Rev. 0

All electrical and mechanical data contained in this document is provided for reference only and represents typical values under optimal operating conditions.
Actual performances may be subjected to cumulative tolerances or variances due to materials, construction or other specific operating and loading conditions, in accordance with IEC 60034.

Mecc Alte S.p.A. reserves the right to change specifications without notice.
The information contained in this document does not constitute a guarantee of performance for any specific application. For specific technical information, please contact your local Mecc Alte office.

This document is the property of Mecc Alte S.p.A. – All rights reserved.
Reproduction, distribution, or transmission of this publication, in whole or in part, is prohibited without prior written consent.

Regulations and Certifications

The alternators are designed, built and tested in accordance with **ISO 9001**, within a certified quality management system. The entire range meets the most common international specifications, including:

CEI 2-3, IEC 34-1, EN 60034-1, VDE 0530

BS 4999-5000, NF 51.111, NEMA MG 1-2011

ISO 8528-3

In addition, they comply with specific regulations for particular markets, such as:

UL 1446, UL 1004-4, UL 1004-B

CAN/CSA-C22.2 No14-95 / No100-95

The ECP and ECO series comply with EEC directives **2006/42/EC (Machinery Directive), 2014/35/EC (Low Voltage Directive), 2014/30/EC (Electromagnetic Compatibility Directive), 2011/65/EC (RoHS 2) and 2015/863 (RoHS 3).**

Windings and performance

- All alternators feature **reduced-pitch** (2/3) windings, which:
  - Eliminate triple harmonics in the voltage waveform
  - Reduce neutral currents during parallel operation
- **Parallel operation** Use alternators of the same model and winding configuration. For different models, contact Mecc Alte Application Engineering to verify compatibility.
- **Damping cage** All models except the ECP3 series include an aluminum or copper damping cage for greater stability during load transients.
- **Reconnectable windings**
  - 12 leads: 50 Hz 380–440 V and 220/110–240/120 V (derating may apply); 60 Hz 380–480 V and 220/110–240/120 V (derating may apply)
  - 6 leads: 50 Hz 380–440 V and 220–240 V (derating may apply); 60 Hz 380–480 V and 220–240 V (derating may apply)

Winding configurations	Standard		Special (dedicated)			
	12 reconnectable wires	6 reconnectable wires	380 V and 600 V 60 Hz	690V 50/60Hz	220-240V 1ph 50Hz	220-240V 1ph 60Hz
ECP3 to ECO38 & (NPE)	●	○	○	○	○	○
ECO40 to ECO46	○	●	○	○	○ *	○ *
ECO47	● 4 wires		○	○	–	-
THD (Total Harmonic Distortion)	<3.5% at full load L-L	<3.0% at full load L-L	<3.5% at full load L-L	<3.5% at full load L-L	<4.5% at full load L-N	<4.5% at full load L-N
Interference suppression	VDE 0875 G/N/K, EN61000-6-3, EN61000-6-2, others available on request					

* Only up to ECO40 series ● Standard ○ Optional

Insulating Materials and Electrical Performance

- **Insulation Class:** H on the entire range
- **Efficiency:** High efficiency as standard
- **Motor Start:** Inrush current >300% for 20 seconds
- **THD (Total Harmonic Distortion):**
  - <3.5% L-L typical (three-phase windings)
  - <4.5% L-N typical (single-phase windings)

Winding protection

Winding protection is crucial to ensure the longevity of the generator based on environmental conditions and electrical stress.

Protection Level	Standard	Standard+	Grey	Grey+	Total+	V-Type
Treated Components	Active parts	Exciter stator	Main stator + exciter	Stator + Exciter	Stator + Exciter + Rotor	Complete system
Type of Treatment	Impregnation resin only	Resin + Grey paint EG43	Grey paint EG43	Stator (EG43) + Exciter (Black severe ep.)	Black protection (stators) + EG43 (rotating parts)	Double VPI, Anti-Corona Wire, Double Layer Black
Series/Typical Application	ECP3, ECP4 (Standard Use)	ECP28, 30, 32	Marine Applications / NPE, ECO, HCP	Harsh industrial environments	Extreme/abusive conditions	Harsh Environments (Extended Warranty)

Detail of specific treatments

- **Grey paint EG43:** Standard protection against moisture and contaminants.
- **Black Protection:** Advanced physical barrier against chemicals and high humidity.
- **V-Type Treatment:** Includes vacuum impregnation (VPI), internal stator insulation, and corona-resistant materials for maximum reliability.


For more information visit: Insulation_System_Guide

Construction


The robust mechanical structure withstands up to 5G in any direction and 9G vertically, and its design allows easy access to connections and components during routine maintenance checks. The mechanical design used the most advanced FEM techniques. The materials used are: DD12 steel for the frame, C45 steel for the shaft and cast iron or die-cast aluminum for the end brackets: the fans are made of die-cast aluminum and nylon reinforced with fiberglass, UL compliant materials. The rotors are dynamically balanced according to ISO 1940-1 grades 6.3 (up to series 32) or 2.5 (series 34 onwards).

Terminals and terminal blocks


Easy access to the regulators is ensured by a pull-out drawer or drop-down panel to allow for safer adjustment. Large terminal blocks allow easy access of power cables, in the higher power ranges ECO43 and ECO46 terminals allow convenient choice of power cable or busbar connection with input and connection versatility. Current transformers are available as an option on the ECO 40, 43, 46 and 47 series with single or dual output.

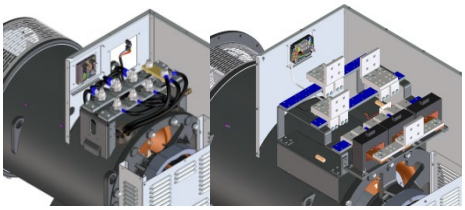

A new AVR panel has been installed on the Type-C family. The terminal blocks have been redesigned in a special "L" configuration, specifically to facilitate connections with customers; With this type of terminal block, a second terminal block can be positioned in order to obtain 12 terminals available. Current transformers are available as an option on the ECO38 series with single or dual output.

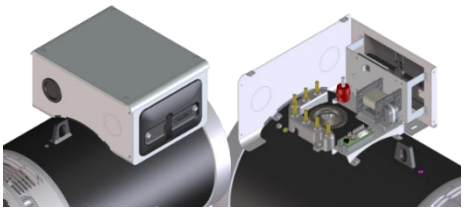

Protection for the environment



In addition to the protection on the windings themselves, alternators can have a higher degree of protection. The standard level is IP23 but the following solutions are also available: IP23 DP with ingress filters, IP23 with terminal box only in IP45, IP43 and IP45. Downgrades may apply.
For more information visit: Bulletin_IP


Optional PMG

The MeccAlte PMG is optionally available factory-fitted on ECP28, ECP30, ECP32, ECP34 and ECO38; Alternatively, only the preparation for future mounting is optional.




On the ECO 40, 43 and 46 series it is optionally available factory-fitted or retrofitted. On the ECO47 the PMG is standard.

The entire AVR range is fully compatible with MAUX and PMG systems, minimizing spare parts management and inventory flexibility, as one AVR adapts to all applications. The PMG delivers the same amount of kVA as the MAUX.



Anti-condensation heater

Our entire range can be equipped with anti-condensation heaters of adequate power and sized to the alternator. The voltage for heaters must be specified when ordering. New cylindrical cartridge heaters are available on request and can be retrofitted.



Accessories

Additional optional can be mounted on our alternator series, such as PTC or PT100 thermistors on both windings and bearings, anti-condensation heaters, high and low profile terminal blocks (on most series), parallel devices, current and voltage transformers, air filters, IP43 and IP45 protections and many more. For more information visit: C-type-accessories

Excitation and regulation systems

All ECP/ECO series are equipped with MAUX auxiliary winding to power the digital controller.

DxR

Both the DSR and DER1 are available for PC connection via the DxR2 USB interface and DxR TERMINAL software to query/download alarms and settings for analysis or for cloning other controllers. DER2 has a built-in USB connection and can be connected to your PC without any optional connection card. Through the DxR connection, other settings such as LAMS, synchronous external control based on digital RAM, and soft start can be achieved. Simple analog potentiometers are available for the most common adjustments.

MxK

The digital controllers of the MxK series (M2K, M2KS, M3K, M3KS, M3KSHD) are configurable via the MeccAlte App for PC or mobile devices, using the USB2MxK (USB) or MxKonnect (Wi-Fi) accessories. The M3KSHD model integrates a USB port for direct connection to the PC, without the need for optional cards. The M2KS, M3KS and M3KSHD models also support CAN Bus communication (SAE J-1939) for integration with MeccAlte GC controllers. Software-accessible features include LAMS, external voltage control (±10V), soft start, and PID autotuning. The controller records up to 64 alarms in E2PROM memory and provides the current status via A ALARMS address. There are analog potentiometers for VOLT, STAB, AMP, and DROOP (the latter on M3K, M3KS, and M3KSHD models only). The M3KSHD includes High Dynamic Response (HDR) for a quick rush of excitement. All MxK regulators are equipped with protections against over/under excitation, overcurrent, V/f, short circuit and power overvoltage.

Regulator	M2K	M2Ks	M3K	M3Ks	M3KsHD	DSR	DER1	DER2
ECP3 to ECO38 & (NPE)	●	○	○	○	○	○	○	○
ECO40 to ECO46	○	○	●	○	○	○	○	○
ECO47	○	○	○	○	●	○	○	○
Parallel operation	-	-	√	√	√	√	√	√
Network Parallel	-	-	√	√	√	√	√	√
Reference 3 phase (rms)	-	-	√	√	√	-	√	√
Accuracy	+/-0.5%	+/-0.5%	+/-0.5%	+/-0.5%	+/-0.5%	+/-1%	+/-0.5%	+/-0.5%
Remote voltage control	√	√	√	√	√	√	√	√
Alarm log	√	√	√	√	√	√	√	√
Analog and digital configurable	√	√	√	√	√	√	√	√
LAMS (Load Acceptance V/f)	√	√	√	√	√	√	√	√
APO (Active Protection Output)	-	-	-	-	√	√	√	√
Soft start	√	√	√	√	√	√	√	√
High Dynamic Response	-	-	-	-	√	-	-	√
USB connection without external cards	-	-	-	-	√	-	-	√

● Standard ○ Optional √ Available

Derating coefficients

	Ambient temperature (Celsius)							
Altitude (meters)	25	40	45	50	55	60	65	70
≤ 1000	1.07	1	0.96	0.93	0.91	0.89	0.85	0.82
> 1000 ≤ 1500	1.01	0.96	0.92	0.89	0.87	0.84	0.81	0.77
> 1500 ≤ 2000	0.96	0.91	0.87	0.84	0.83	0.79	0.77	0.73
> 2000 ≤ 3000	0.90	0.85	0.81	0.78	0.76	0.73	0.71	0.68
> 3000 ≤ 4000	0.84	0.78	0.75	0.73	0.70	0.68	0.66	0.62
> 4000 ≤ 5000	0.78	0.72	0.69	0.67	0.65	0.62	0.59	0.56
> 5000 ≤ 6000	0.70	0.65	0.63	0.61	0.58	0.55	0.53	0.50

Notes on short-circuit curves

The coefficients indicated must be used to correct the values of the three-phase short-circuit curves as a function of the nominal voltage.

50 Hz		*60 Hz*	
Voltage	*Factor*	*Voltage*	*Factor*
380	0.93x	415	0.85x
400	1x	440	0.90x
415	1.04x	460	0.95x
440	1.10x	480	1x

The indicated coefficient must be used to correct the values of the three-phase short-circuit curves as a function of the type of short-circuit voltage.

	3 Steps	*2 L-L phases*	*1 L-N phase*
Instant	1x	0.87x	1.30x
Minimum	1x	1.80x	3.20x
Supported	1x	1.50x	2.50x
Maximum duration	20 s	10 s	4 s

All curves are shown for star connection in series or parallel at 400V 50 Hz or 480V 60 Hz. If the unit is reconnected from series to star parallel, the additional coefficient is 2x. From the star series to the delta series, it is 1.72x. From star in series to parallel triangle, it is 3.44x.

A smaller generator can be selected for a given engine starting service, as it has lower subtransient reactance values for nonlinear loads. The entire range from 6.5 to 3400 kVA is capable of delivering a sustained short-circuit current of >300% for up to 20 seconds.

Selection & Sizing Tools

Online tools available at select.meccalte.com support alternator selection, sizing and configuration:

- **Sizing Tool** – power sizing, motor starting and electrical verification for industrial alternators.
- **Ratings Book** – complete kVA ratings reference, 50/60 Hz, all standard voltages and temperature classes.
- **PMG Configurator** – model selection and output configuration for permanent magnet generators.
- **3D/2D CAD Library** – STEP models and 2D drawings for alternators and AVR regulators.
- **Winding Resistance** – reference resistance data for all alternator families.

For more information visit: select.meccalte.com

General characteristics

Pole number	4	Insulation class	H
Phase number	3	Protection class	IP23
Number of wires	12	NDE Bearing type	6311.2RS
Execution	Brushless	DE Bearing type	
Regulator type	M2K	Maximum Overspeed	2250
Winding pitch	2/3	Altitude	0-1000
Code voltage reference	T0405S3	Balancing	ISO1940-1

Ratings 50Hz

kVA / kW @ Temp. Rise / Ambient °C - 0.8 PF

		STANDBY-163/27				STANDBY-150/40				H-125/40				F-105/40				B-80/40			
Series Star Y		380V	400V	415V	440V	380V	400V	415V	440V	380V	400V	415V	440V	380V	400V	415V	440V	380V	400V	415V	440V
Parallel Star YY		190V	200V	208V	220V	190V	200V	208V	220V	190V	200V	208V	220V	190V	200V	208V	220V	190V	200V	208V	220V
Series Delta Δ		220V	230V	240V	254V	220V	230V	240V	254V	220V	230V	240V	254V	220V	230V	240V	254V	220V	230V	240V	254V
Parallel Delta ΔΔ		110V	115V	120V	127V	110V	115V	120V	127V	110V	115V	120V	127V	110V	115V	120V	127V	110V	115V	120V	127V
NPE34 1S4 C	**kVA**	47	**47**	47	38,7	45,7	**45,7**	45,7	37,9	43	**43**	43	35,4	38,8	**38,8**	38,8	32	34,4	**34,4**	34,4	28,3
	kW	37,6	**37,6**	37,6	31	36,6	**36,6**	36,6	30,3	34,4	**34,4**	34,4	28,3	31	**31**	31	25,6	27,5	**27,5**	27,5	22,6
NPE34 2S4 C	**kVA**	54,7	**54,7**	54,7	43,8	52,5	**52,5**	52,5	43	50	**50**	50	40	45	**45**	45	36	40	**40**	40	32
	kW	43,8	**43,8**	43,8	35	42	**42**	42	34,4	40	**40**	40	32	36	**36**	36	28,8	32	**32**	32	25,6
NPE34 1M4 C	**kVA**	65,6	**65,6**	65,6	55,7	63,4	**63,4**	63,4	53,8	60	**60**	60	50,9	53,8	**53,8**	53,8	46,1	48	**48**	48	40,7
	kW	52,5	**52,5**	52,5	44,6	50,7	**50,7**	50,7	43	48	**48**	48	40,7	43	**43**	43	36,9	38,4	**38,4**	38,4	32,6
NPE34 2M4 C	**kVA**	76,5	**76,5**	76,5	64,6	74,1	**74,1**	74,1	62,2	70	**70**	70	59,1	62,7	**62,7**	62,7	53,4	56	**56**	56	47,3
	kW	61,2	**61,2**	61,2	51,7	59,3	**59,3**	59,3	49,8	56	**56**	56	47,3	50,2	**50,2**	50,2	42,7	44,8	**44,8**	44,8	37,8
NPE34 L4 C	**kVA**	98,4	**98,4**	98,4	82	94,8	**94,8**	94,8	78,6	90	**90**	90	75	81,6	**81,6**	81,6	67,8	72	**72**	72	60
	kW	78,7	**78,7**	78,7	65,6	75,8	**75,8**	75,8	62,9	72	**72**	72	60	65,3	**65,3**	65,3	54,2	57,6	**57,6**	57,6	48

Ratings 60Hz

kVA / kW @ Temp. Rise / Ambient °C - 0.8 PF

		STANDBY-163/27				STANDBY-150/40				H-125/40				F-105/40				B-80/40			
Series Star Y		415V	440V	460V	480V	415V	440V	460V	480V	415V	440V	460V	480V	415V	440V	460V	480V	415V	440V	460V	480V
Parallel Star YY		208V	220V	230V	240V	208V	220V	230V	240V	208V	220V	230V	240V	208V	220V	230V	240V	208V	220V	230V	240V
Series Delta Δ		240V	254V	265V	277V	240V	254V	265V	277V	240V	254V	265V	277V	240V	254V	265V	277V	240V	254V	265V	277V
Parallel Delta ΔΔ		120V	127V	133V	138V	120V	127V	133V	138V	120V	127V	133V	138V	120V	127V	133V	138V	120V	127V	133V	138V
NPE34 1S4 C	**kVA**	52,7	56,4	56,4	**56,4**	51,2	54,5	54,5	**54,5**	48	52	52	**52**	43,3	46,7	46,7	**46,7**	38,6	41,3	41,3	**41,3**
	kW	42,2	45,1	45,1	**45,1**	41	43,6	43,6	**43,6**	38,4	41,6	41,6	**41,6**	34,6	37,4	37,4	**37,4**	30,9	33	33	**33**
NPE34 2S4 C	**kVA**	60,2	65,6	65,6	**65,6**	57	63	63	**63**	55	60	60	**60**	49,5	54,5	54,5	**54,5**	44	48	48	**48**
	kW	48,2	52,5	52,5	**52,5**	45,6	50,4	50,4	**50,4**	44	48	48	**48**	39,6	43,6	43,6	**43,6**	35,2	38,4	38,4	**38,4**
NPE34 1M4 C	**kVA**	68,2	73,5	78,7	**78,7**	65,8	70,6	76,3	**76,3**	62	67	72	**72**	55,7	60	64,8	**64,8**	49,9	53,8	57,6	**57,6**
	kW	54,6	58,8	63	**63**	52,6	56,5	61	**61**	49,6	53,6	57,6	**57,6**	44,6	48	51,8	**51,8**	39,9	43	46,1	**46,1**
NPE34 2M4 C	**kVA**	79,3	85	91,8	**91,8**	76,7	82,5	89,2	**89,2**	72,6	77,8	84	**84**	64,8	70	75,7	**75,7**	58,1	62,2	67,2	**67,2**
	kW	63,4	68	73,4	**73,4**	61,4	66	71,4	**71,4**	58,1	62,2	67,2	**67,2**	51,8	56	60,6	**60,6**	46,5	49,8	53,8	**53,8**
NPE34 L4 C	**kVA**	96,2	112	115	**115**	92,5	107	110	**110**	88	102	105	**105**	79,5	90	95,1	**95,1**	70,4	81,6	84	**84**
	kW	77	89,6	92	**92**	74	85,6	88	**88**	70,4	81,6	84	**84**	63,6	72	76,1	**76,1**	56,3	65,3	67,2	**67,2**

Reactance & Time constants- Class H / 400V

Unsaturated (ref. EN60034-4)			NPE34 1S4 C	NPE34 2S4 C	NPE34 1M4 C	NPE34 2M4 C	NPE34 L4 C
Xd	Direct-axis synchronous reactance	%	349,1	273,1	313,8	373,3	257,7
X'd	Direct-axis transient reactance	%	24	20,9	24	26	15,8
X"d	Direct-axis subtransient reactance	%	7,95	6,77	7,78	12,7	6,67
Xq	Quadrature-axis synchronous reactance	%	183,3	177,8	204,3	228,9	131,3
X'q	Quadrature-axis transient reactance	%	183,3	177,8	204,3	228,9	131,3
X"q	Quadrature-axis subtransient reactance	%	31,7	37	42,6	47,3	28,5
X_2	Negative-sequence reactance	%	19,2	21,2	24,5	29,3	16,9
X_0	Zero sequence reactance	%	3,87	4,16	4,78	4,53	2,69
Saturated							
Xd	Direct-axis synchronous reactance	%	296,7	232,1	266,7	317,3	219
X'd	Direct-axis transient reactance	%	20,4	17,8	20,4	22,1	13,4
X"d	Direct-axis subtransient reactance	%	6,76	5,75	6,61	10,8	5,67
Xq	Quadrature-axis synchronous reactance	%	155,8	151,1	173,7	194,6	111,6
X'q	Quadrature-axis transient reactance	%	155,8	151,1	173,7	194,6	111,6
X"q	Quadrature-axis subtransient reactance	%	26,9	31,4	36,2	40,2	24,2
X_2	Negative-sequence reactance	%	16,3	18	20,8	24,9	14,4
X_0	Zero sequence reactance	%	3,87	4,16	4,78	4,53	2,69
Kcc	Short circuit ratio		0,34	0,43	0,37	0,32	0,46
T'd	Transient time constant	sec	0,056	0,059	0,069	0,085	0,053
T"d	Subtransient time constant	sec	0,012	0,014	0,017	0,019	0,011
T'do	Open circuit time constant	sec	0,82	0,77	0,9	1,22	0,86
Ta	Armature time constant	sec	0,016	0,018	0,021	0,026	0,017

Additional information - Class H / 400V

Io	Excitation current at no load	A	0,7	0,5	0,5	0,5	0,7
Ic	Excitation current at full load	A	2,7	2,4	2,4	2,6	2,9
Overload					-		
Overload per 20 sec. PRP or 10 sec. COP		%			300		
Heat dissipation		W	3950	4593	4980	4280	7295
Telephone Harmonic Factor - THF		%	<2	<2	<2	<2	<2
Waveform Distors.(THD) full load LL/LN		%	2,3 / 2,3	2,2 / 2,3	2 / 2,2	1,8 / 2	1,8 / 1,9
Waveform Distors.(THD) no load LL/LN		%	2,5 / 2,9	2,9 / 3	2,8 / 3	2,7 / 3	2,7 / 2,9

Reactance & Time constants- Class H / 480V


Unsaturated (ref. EN60034-4)			NPE34 1S4 C	NPE34 2S4 C	NPE34 1M4 C	NPE34 2M4 C	NPE34 L4 C
Xd	Direct-axis synchronous reactance	%	351,8	273,1	313,8	373,3	250,5
X'd	Direct-axis transient reactance	%	24,2	20,9	24	26	15,4
X"d	Direct-axis subtransient reactance	%	8,01	6,77	7,78	12,7	6,48
Xq	Quadrature-axis synchronous reactance	%	184,7	177,8	204,3	228,9	127,7
X'q	Quadrature-axis transient reactance	%	184,7	177,8	204,3	228,9	127,7
X"q	Quadrature-axis subtransient reactance	%	31,9	37	42,6	47,3	27,7
X_2	Negative-sequence reactance	%	19,3	21,2	24,5	29,3	16,4
X_0	Zero sequence reactance	%	3,9	4,16	4,78	4,53	2,62
Saturated							
Xd	Direct-axis synchronous reactance	%	299	232,1	266,7	317,3	212,9
X'd	Direct-axis transient reactance	%	20,6	17,8	20,4	22,1	13,1
X"d	Direct-axis subtransient reactance	%	6,81	5,75	6,61	10,8	5,51
Xq	Quadrature-axis synchronous reactance	%	157	151,1	173,7	194,6	108,5
X'q	Quadrature-axis transient reactance	%	157	151,1	173,7	194,6	108,5
X"q	Quadrature-axis subtransient reactance	%	27,1	31,4	36,2	40,2	23,5
X_2	Negative-sequence reactance	%	16,4	18	20,8	24,9	13,9
X_0	Zero sequence reactance	%	3,9	4,16	4,78	4,53	2,62
Kcc	Short circuit ratio		0,33	0,43	0,37	0,32	0,47
T'd	Transient time constant	sec	0,056	0,059	0,069	0,085	0,053
T"d	Subtransient time constant	sec	0,012	0,014	0,017	0,019	0,011
T'do	Open circuit time constant	sec	0,82	0,77	0,9	1,22	0,86
Ta	Armature time constant	sec	0,016	0,018	0,021	0,026	0,017


Additional information - Class H / 480V


Io	Excitation current at no load	A	0,7	0,5	0,5	0,5	0,7
Ic	Excitation current at full load	A	2,7	2,4	2,4	2,6	2,9
Overload					-		
Overload per 20 sec. PRP or 10 sec. COP		%			300		
Heat dissipation		W	5089	5452	6117	7716	7413
Telephone Interferance Factor - TIF			<40	<40	<40	<40	<40
Waveform Distors.(THD) full load LL/LN		%	2,3 / 2,3	2,2 / 2,3	2 / 2,2	1,8 / 2	1,8 / 1,9
Waveform Distors.(THD) no load LL/LN		%	2,5 / 2,9	2,9 / 3	2,8 / 3	2,7 / 3	2,7 / 2,9


Efficiencies @ 50Hz


Models		380V 50Hz					400V 50Hz					415V 50Hz					440V 50Hz				
		0.25	0.5	0.75	1	1.1	0.25	0.5	0.75	1	1.1	0.25	0.5	0.75	1	1.1	0.25	0.5	0.75	1	1.1
NPE34 1S4 C	%	80,7	86,8	90,0	90,0	89,4	80,4	86,7	89,9	89,7	89,0	80,2	86,7	90,0	89,6	88,9	80,1	86,3	89,3	89,0	88,3
NPE34 2S4 C	%	80,8	87,0	90,0	90,0	89,4	80,5	86,9	89,9	89,7	89,0	80,2	86,9	90,0	89,6	88,8	80,2	86,5	89,3	89,0	88,3
NPE34 1M4 C	%	86,6	90,6	91,0	90,5	89,4	86,7	90,9	91,3	90,6	89,4	86,5	90,7	91,1	90,3	89,1	86,3	90,3	90,4	89,6	88,5
NPE34 2M4 C	%	90,3	90,6	90,7	89,6	89,3	90,5	90,9	91,0	89,7	89,3	90,2	90,7	90,8	89,4	89,0	90,1	90,4	90,2	88,8	88,4
NPE34 L4 C	%	91,9	92,9	91,6	90,9	90,5	91,5	92,8	91,7	90,8	90,4	91,3	92,8	91,4	90,5	90,1	91,1	92,4	90,9	90,1	89,7

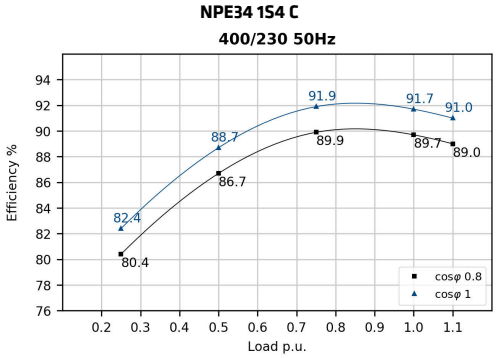

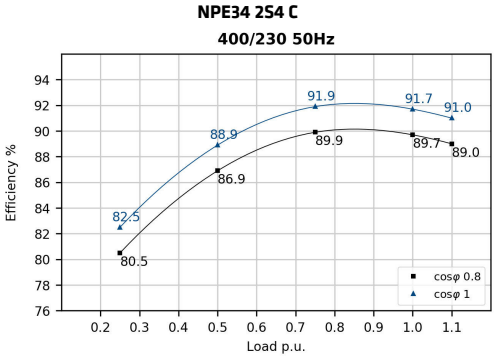

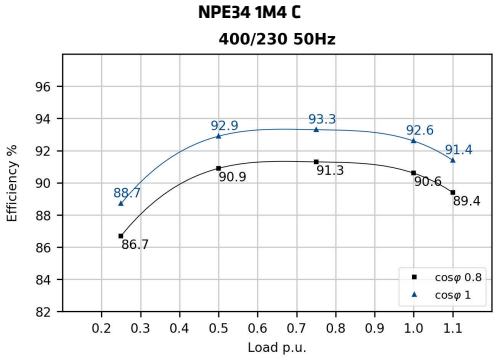

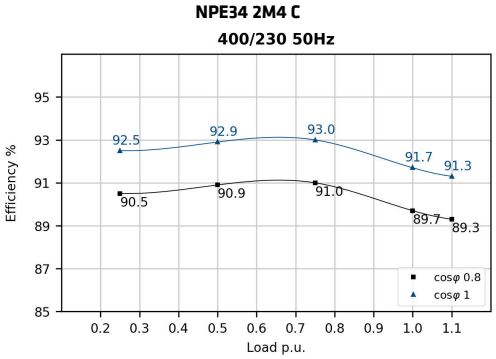


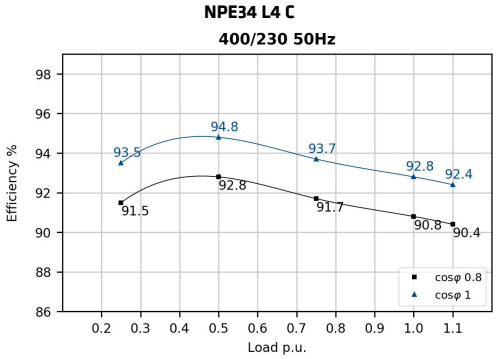


Efficiencies @ 60Hz

Models		415V 60Hz					440V 60Hz					460V 60Hz					480V 60Hz				
		0.25	0.5	0.75	1	1.1	0.25	0.5	0.75	1	1.1	0.25	0.5	0.75	1	1.1	0.25	0.5	0.75	1	1.1
NPE34 1S4 C	%	81,8	87,7	90,3	88,6	87,3	81,8	87,8	90,3	88,9	87,9	81,8	87,9	90,8	89,4	88,4	81,5	87,8	90,6	89,1	88,0
NPE34 2S4 C	%	81,5	88,0	90,6	89,3	87,7	81,5	88,1	90,6	89,8	88,5	81,5	88,2	91,1	90,1	88,6	81,1	88,1	90,9	89,8	88,6
NPE34 1M4 C	%	86,7	90,5	90,6	89,2	87,6	87,0	90,9	90,9	89,4	87,9	87,6	91,8	91,7	90,0	88,3	87,7	92,1	92,1	90,4	88,6
NPE34 2M4 C	%	91,4	91,9	91,3	88,8	88,0	91,7	92,3	91,8	89,3	88,5	91,6	92,6	92,3	89,8	89,0	91,6	92,3	92,2	89,7	88,7
NPE34 L4 C	%	92,9	94,3	92,7	91,4	90,7	92,9	94,4	92,9	91,7	91,2	92,9	94,5	93,0	92,0	91,3	92,5	94,4	93,0	91,9	91,4


NPE34 1S4 C
480/277 60Hz

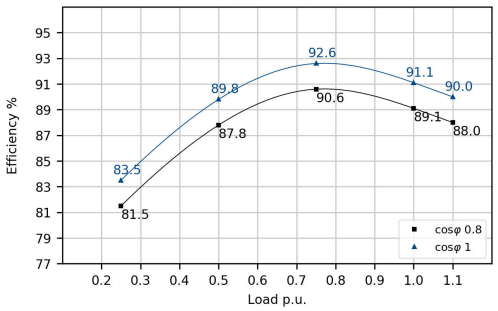


NPE34 2S4 C
480/277 60Hz

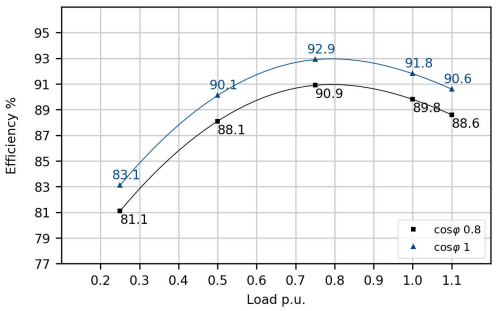


NPE34 1M4 C
480/277 60Hz

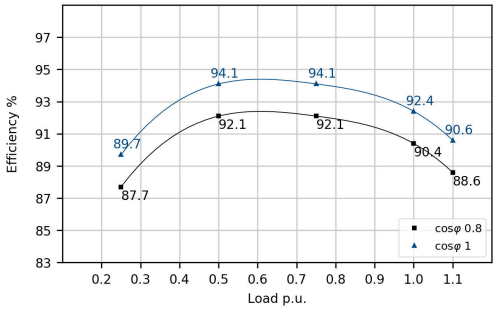

NPE34 2M4 C
480/277 60Hz

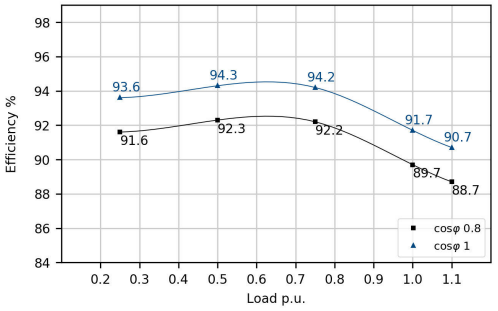



NPE34 L4 C
480/277 60Hz

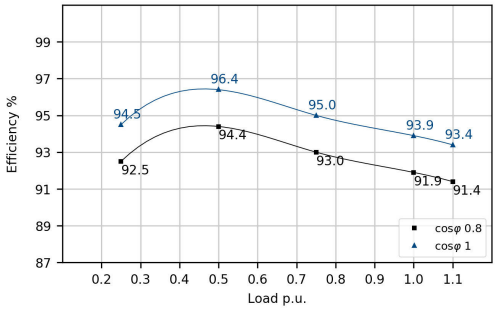


Transients voltage


400V - 50Hz

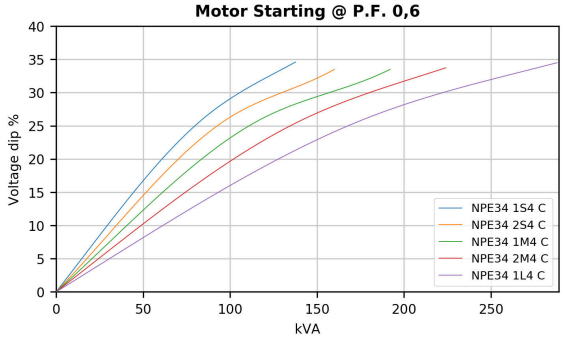


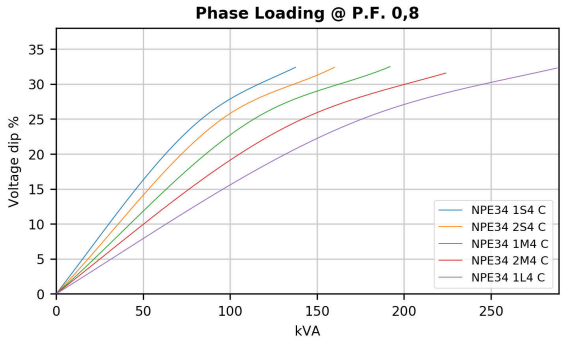


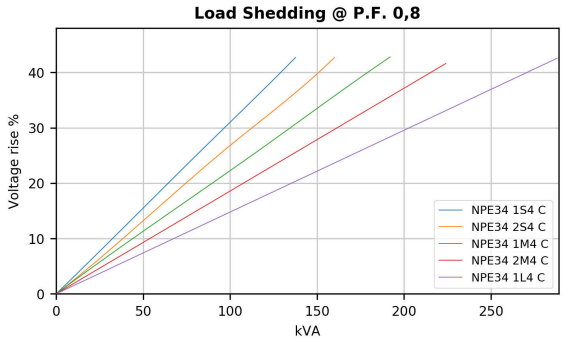

480V - 60Hz

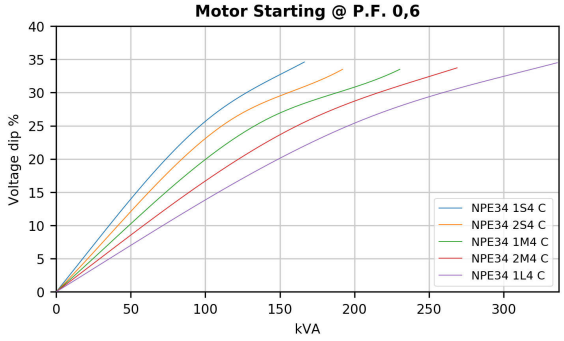

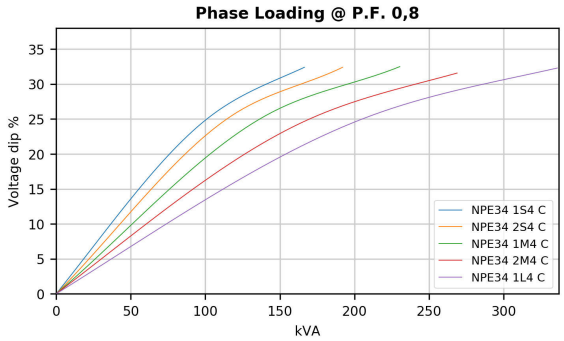

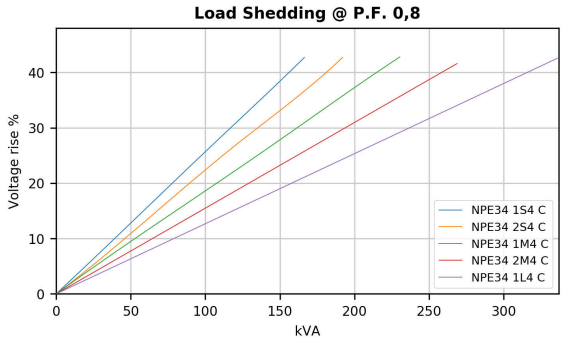


In order to scale transient curves as a function of a power factor or voltage if not indicated, please proceed as follows:

Power Factor coefficient corrector (PFCC), to be used on power factor 0.6 curves:
PFCC=sin(ARCcos (PFnew))/0.8
Example. The PFCC at power factor 0.3 is 1.192 [PFCC= sin(ARCcos (0.3))/0.8]. This means that the voltage fall at a given power at pf 0.3 is equivalent to the one that can be read on the pf 0.6 curve if the load is considered 1.192 times bigger (19% higher value.).
In this example, a 100 kVA load insertion at pf 0.3 is equivalent in voltage fall to a 119kVA load insertion at pf 0.6.


Voltage coefficient corrector (VCC):
VCC=(400/Vnew)2 if 50 Hz; VCC=(480/Vnew)2 if 60 Hz
Example. VCC at 415V 60 Hz is 1.338 [VCC=(480/415)^2]. This means that the voltage fall at a given power at 415V is equivalent to the one that can be read on the power factor 0.6 curve if the load is considered 1.338 times bigger (33% higher value.).
In this example, a 100 kVA load insertion at 415V is equivalent in voltage fall to a 133kVA load insertion at 480V.

50Hz Short circuit decrement curves - No load excitation at rated speed


NPE34 1S4 C

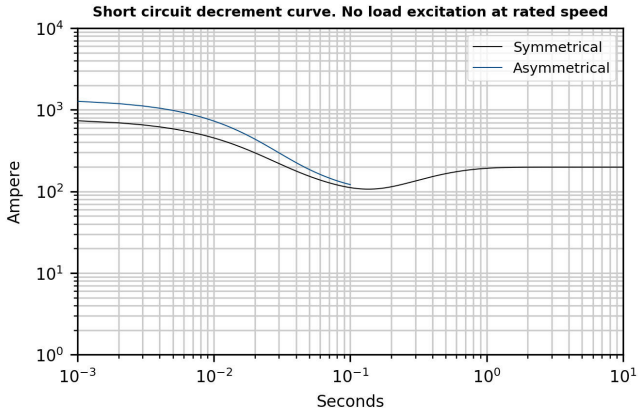


NPE34 2S4 C

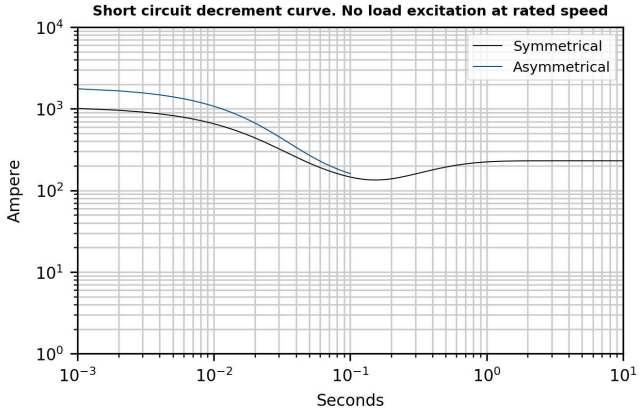

NPE34 1M4 C

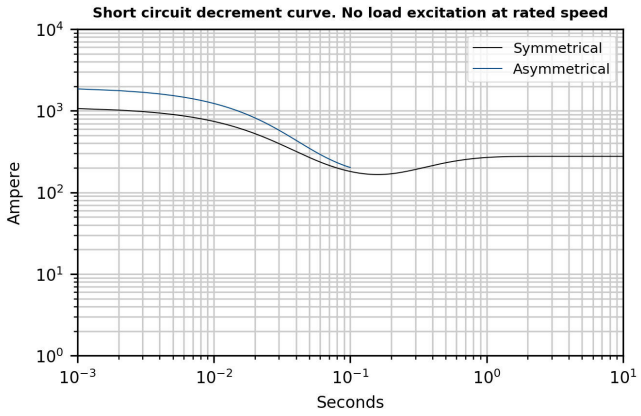


NPE34 2M4 C

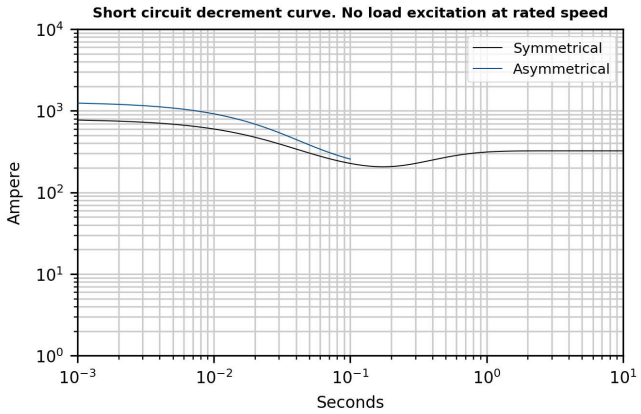

*Please refer to tables at page 6

50Hz Short circuit decrement curves - No load excitation at rated speed


NPE34 L4 C

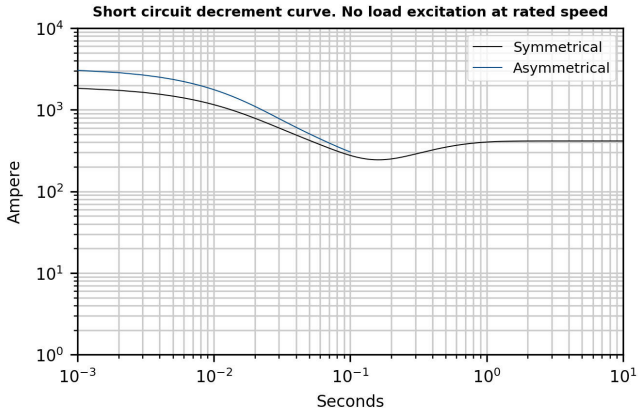


*Please refer to tables at page 6

60Hz Short circuit decrement curves - No load excitation at rated speed


NPE34 1S4 C

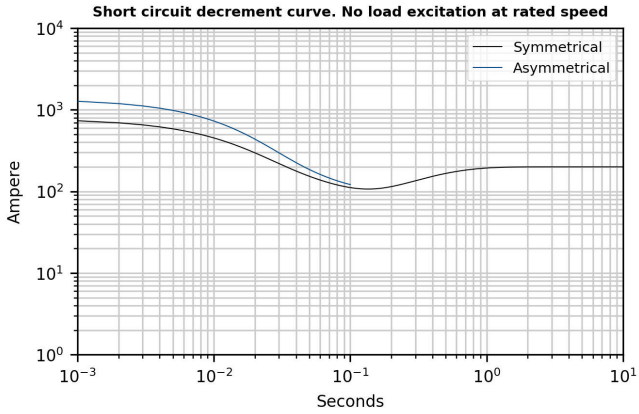


NPE34 2S4 C

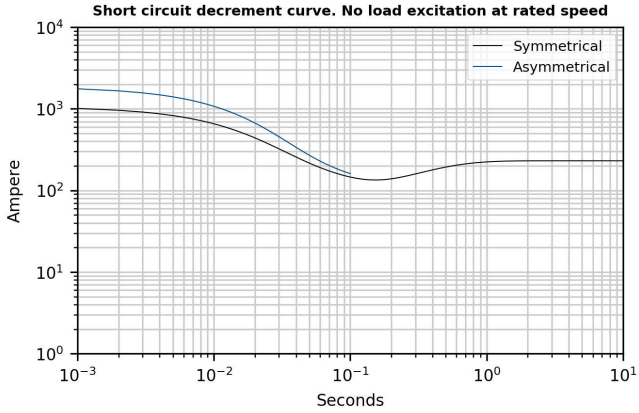

NPE34 1M4 C

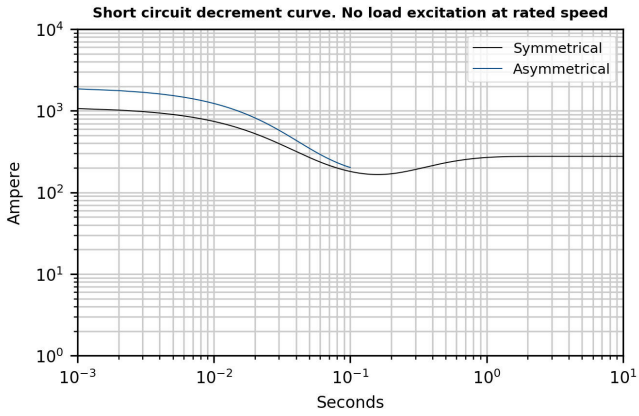


NPE34 2M4 C

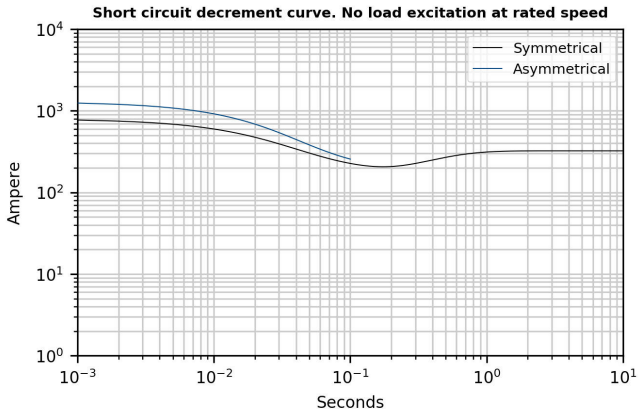

*Please refer to tables at page 6

60Hz Short circuit decrement curves - No load excitation at rated speed

NPE34 L4 C

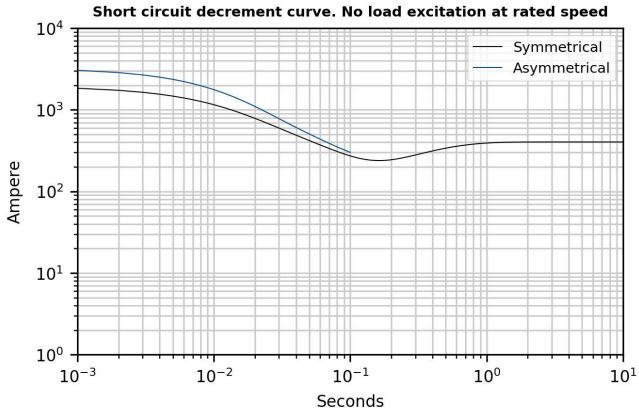


*Please refer to tables at page 6

Additional Characteristics


Data		NPE34 1S4 C		NPE34 2S4 C		NPE34 1M4 C		NPE34 2M4 C		NPE34 L4 C	
		50Hz	60Hz	50Hz	60Hz	50Hz	60Hz	50Hz	60Hz	50Hz	60Hz
Damper cage		Aluminium									
Single stator coil resistance (20°C)	Ω	0,033		0,069		0,052		0,042		0,028	
Rotor Winding Resistance (20°C)	Ω	2,392		2,844		2,105		2,312		3,467	
Stator Exciter Resistance (20°C)	Ω	13,47		13,47		13,47		13,47		13,47	
Rotor Exciter Resistance (20°C)	Ω	0,36		0,36		0,36		0,36		0,36	
Auxiliary Winding Resistance (20°C)	Ω	1,43		1,35		1,35		1,18		1,05	
Weight of complete generator	kg	210,0		230,0		250,0		271,0		315,0	
Unbalanced magnetic pull	kN/mm	4,8		5,1		5,3		5,4		5,5	
Air flow	m^3/min	15,9	19,6	15,9	19,6	15,9	19,6	15,9	19,6	15,9	19,6
Noise level at 1m/7m	dB(A)										

PQ Diagram

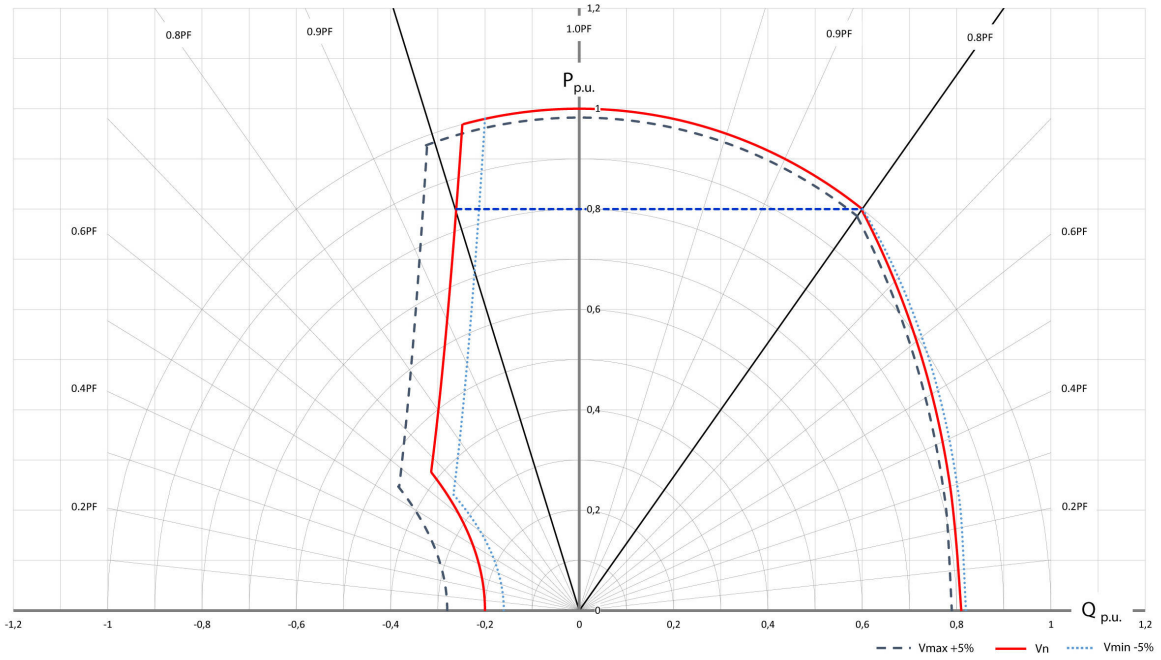

* The PQ diagram above refers to three-phase application only.

MOMENTS OF INERTIA - SINGLE BEARING

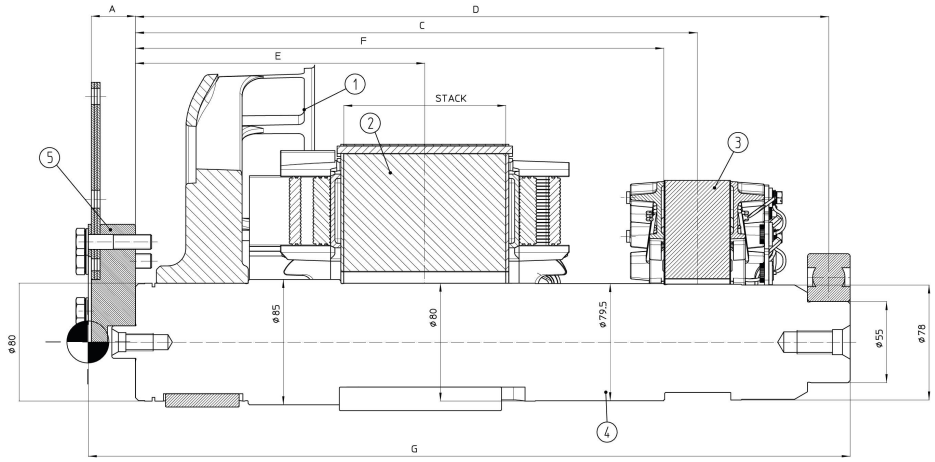


* Shaft mass and inertia also include rotor keys

TYPE	COMPONENT								TOTAL	
	1 FAN		2 MAIN ROTOR		3 EXCITER ROTOR		4 SHAFT*			
	Weight [kg]	J [kgm²]	Weight [kg]	J [kgm²]	Weight [kg]	J [kgm²]	Weight [kg]	J [kgm²]	Weight [kg]	J [kgm²]
NPE34 1S/4C	3.95	0,093	36.4	0.33	12.2	0.08	18	0.014	70.55	0.517
NPE34 2S/4C			42.6	0.39					76.75	0.577
NPE34 1M/4C			49	0.44			19.8	0.015	84.95	0.628
NPE34 2M/4C			56.7	0.51					92.65	0.698
NPE34 1L/4C			70.6	0.64			21.4	0.016	108.15	0.829

SAE N.	5 SHAFTS COUPLING FLEX PLATE		
	A	Weight [kg]	J [kgm²]
11.5	30	4.6	0.06
10	30	3.2	0.04

TYPE	C [mm]	D [mm]	E [mm]	F [mm]	G [mm]
NPE34 1S/4C	380	470.5	186	358.9	517
NPE34 2S/4C			196		
NPE34 1M/4C	430	520.5	206	408.9	567
NPE34 2M/4C			219		
NPE34 1L/4C	470	560.5	241	448.9	607

NPE34C_MD35

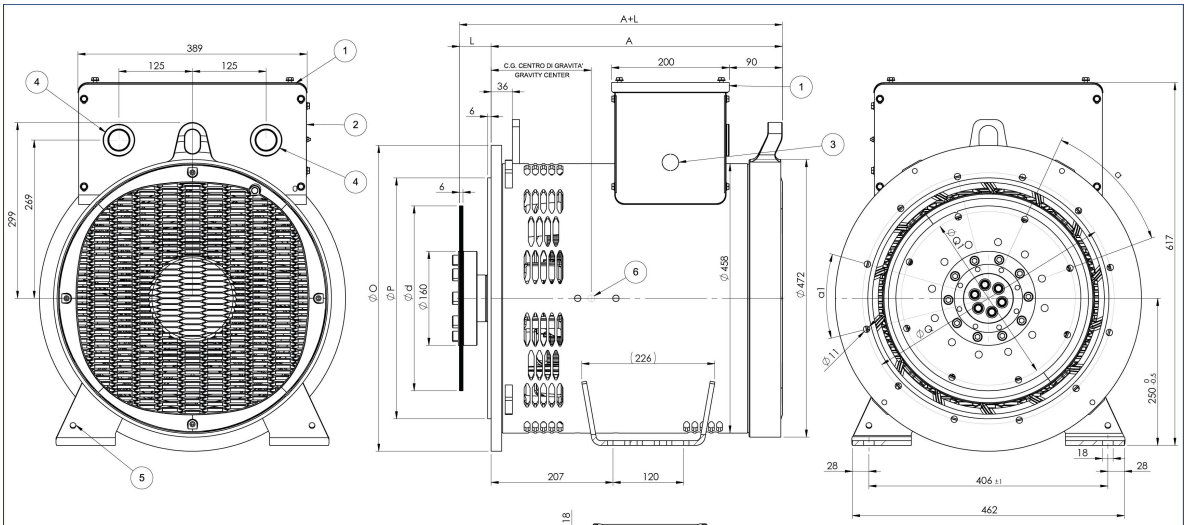

SAE N.	GIUNTI A DISCHI / DISC COUPLING				
	d	L	Q1	S1	α
10	314.32	53.8	295.27	11	45°
11.5	352.42	39.6	333.37	11	45°

SERIE SERIES	MODELLO MODEL	A	C.G.
NPE34	1S4 C	495	230
	2S4 C	495	240
	1M4 C	545	260
	2M4 C	545	275
	1L4 C	585	295

SAE N.	FLANGIA / FLANGE			
	O	P	Q	α1
3	451	409.6	428.6	30°
4	403	362	381	30°

1	COPERCHIO REMOVIBILE PER ACCESSO AI TERMINALI PRINCIPALI REMOVABLE COVER FOR ACCESS TO MAIN TERMINALS
2	PANNELLO REMOVIBILE PER ACCESSO AL REGOLATORE REMOVABLE PANEL FOR ACCESS TO AVR
3	PRE-TAGLIO SU PANNELLO PRINCIPALE PER L'INGRESSO CAVI ø28 PRE-CUT ON MAIN PANEL FOR CABLE ENTRY ø28
4	FORO STANDARD PER INFRESSO CAVI ø80 STANDARD HOLE ON FRONT FOR CABLE ENTRY ø80
5	VITE M8 PER MESSA A TERRA SCREW M8 FOR GROUNDING
6	CENTRO DI GRAVITA' IN CONFIGURAZIONE SAE 4 - 10 GRAVITY CENTER IN CONFIGURATION SAE 3 FLYWHEEL 4 -10

NPE34_MD35

Notes

Mecc Alte SpA (HQ)
Via Roma
20 – 36051 Creazzo
Vicenza – ITALY
T: +39 0444 396111
E: info@meccalte.it
aftersales@meccalte.it

Mecc Alte Portable
Via Roma
20 – 36051 Creazzo
Vicenza – ITALY
T: +39 0444 396111
E: info@meccalte.it

Mecc Alte Power Products srl
Via Melaro
2 – 36075 Montecchio
Maggiore (VI) – ITALY
T: +39 0444 1831295
E: info@meccalte.it

Zanardi Alternatori srl
Via Dei Laghi
48/B – 36077 Altavilla
Vicenza – ITALY
T: +39 0444 370799
E: info@zanardialternatori.it

United Kingdom
Mecc Alte U.K. LTD
6 Lands' End Way
Oakham
Rutland LE15 6RF
T: +44 (0) 1572 771160
E: info@meccalte.co.uk

Spain
Mecc Alte España S.A.
C/ Rio Taibilla, 2
Polig. Ind. Los Valeros
03178 Benijofar (Alicante)
T: +34 (0) 96 6702152
E: info@meccalte.es

China
Mecc Alte Alternator Haimen LTD
755 Nanhai East Rd
Jiangsu HEDZ 226100 PRC
T: +86 (0) 513 82325758
E: info@meccalte.cn

India
Mecc Alte India PVT LTD
Plot NO: 1, Sanaswadi
Talegaon
Dhamdhere Road Taluka:
Shirur. District:
Pune - 412208
Maharashtra, India
T: +91 2137 619600
E: info@meccalte.in

U.S.A. and Canada
Mecc Alte Inc.
1229 Adams Drive
McHenry, IL, 60051
T: +1 815 344 0530
E: info@meccalte.us

Germany
Mecc Alte Generatoren GmbH
Bucher Hang 2
D-87448 Waltenhofen
T: +49 (0)831 540755 0
E: info@meccalte.de

Australia
Mecc Alte Alternators PTY LTD
10 Duncan Road, PO Box 1046
Dry Creek, 5094, South
Australia
T: +61 (0) 8 8349 8422
E: info@meccalte.com.au

France
Mecc Alte International S.A.
Z.E.La Gagnerie
16330 ST.Amant de Boixe
T: +33 (0) 545 397562
E: info@meccalte.fr

Far East
Mecc Alte (F.E.) PTE LTD
19 Kian Teck Drive
Singapore 628836
T: +65 62 657122
E: info@meccalte.com.sg

mecc alte

www.meccalte.com