



Totally Focused. Totally Independent.

Technical Specification

EC046 4 A



Dynamic Data Support

The world's largest
independent producer of
alternators 1 - 5,000kVA

**All electrical / mechanical data are to be considered as a reference and they can
be modified without any notice.**

This document is a property of Mecc Alte S.p.A.. All rights reserved.

Standards

Alternators are designed and produced within an ISO 9001 environment. The entire series is manufactured according to, and complies with, the most common specifications such as CEI 2-3, IEC 34-1, EN 60034-1, VDE 0530, BS 4999-5000, NF 51.111, NEMA MG 1-2011, ISO 8528-3. They also comply with other specific standards such as UL1446, UL 1004/4 and /B and CAN/CSA-C22.2 No14-95-No100-95.

Windings and Performances

All windings are 2/3rds pitch to eliminate triplen harmonics within the voltage waveform and to avoid excessive neutral currents in certain parallel operating conditions. A fully interconnected aluminium or copper damper cage is supplied on the rotor of all models (excluding the ECP3 series).


- ▶ 12 wire reconnectable:
50Hz – 380V to 440V and 220/110V to 240/120V (de-rates may apply at certain voltages)
60Hz – 380V to 480V and 220/110V to 240/120V (de-rates may apply at certain voltages)
- ▶ 6 wire reconnectable:
50Hz – 380V to 440V and 220V to 240V (de-rates may apply at certain voltages)
60Hz – 380V to 480V and 220V to 240V (de-rates may apply at certain voltages)

Winding Configurations	Standard		Special (dedicated)			
	12 wire Reconnectable	6 wire Reconnectable	380V and 600V 60Hz	690V 50/60Hz	220-240V 1ph 50Hz	220-240V 1ph 60Hz
ECP3 to ECO38	Std	Option	Option	Option	Option	Option
ECO40 to ECO46	Std	Option	Option	Option		
ECO47	Std 4 wires		Option	Option	Option (to ECO40)	
Insulation materials	Class H	Class H	Class H	Class H	Class H	Class H
High efficiency	Std	Std	Std	Std	Std	Std
High motor starting	>300%	>300%	>300%	>300%	>300%	>300%
THD (Total Harmonic Distortion)	Typically <3.5% full load L-L	Typically <3.0% full load L-L	Typically <3.5% full load L-L	Typically <3.5% full load L-L	Typically <4.5% full load L-N	Typically <4.5% full load L-N
Interference suppression	VDE 0875 G/N/K, EN61000-6-3, EN61000-6-2, others available on request					

Winding Protection

There are various degrees of protection for the windings following the standard impregnation process, as can be seen here. The TOTAL+ butadienic black flexible coating is recommended for arduous applications.

Winding Protection:	STANDARD	STANDARD+	GREY	GREY+	TOTAL+
ECP3	Std	Option	Option	Option	Option
ECP28 and ECP32	-	Std	Option	Option	Option
NPE, ECP34 to ECO47	-	-	Std	Option	Option

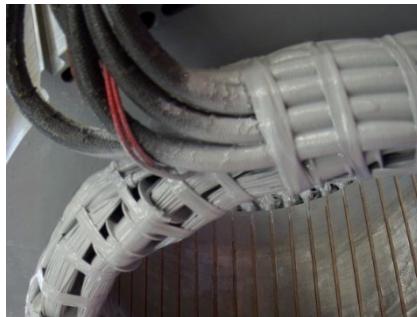

Grey treatment (marinization) on the left, TOTAL+ treatment shown on the right. The EG43 grey varnish, is an high temperature insulating enamel that forms a tough and flexible film, with excellent moisture and chemical protection. It is water and oil proof, and also protects windings from abrasion. It is applied spraying an over coating layer over the impregnated winding, or dipping the stator in a varnish barrel for superior treatments.

The TOTAL+ is a Mecc Alte protection system. It is the ultimate winding treatment that offers truly superior performances when the environment is really harsh, or the application very demanding. The TOTAL+ is also extremely resistant to the particle abrasion as it adsorbs the impacts.

Design


The robust mechanical structure withstands up to 5G in any direction and 9G vertically and its design permits easy access to the connections and components during routine maintenance check-ups. The mechanical design has used the most advanced FEM analisys. The materials used are: DD12 steel for the frame, C45 steel for the shaft and cast iron or aluminum pressure die cast for the end-brackets: fans are either aluminum die casted or nylon fiber glass loaded, UL compliant materials. Rotors are dynamically balanced according grades 6.3 (up to series 32) or 2.5 (from series 34 onwards) of ISO 1940-1.

Terminals and Terminal Box

Easy access to regulators is assured through a pull out drawer or a drop down panel to allow safer adjustment. Large terminal boxes allow easy access of power cables, in the ECO43 and ECO46 higher power ranges the terminal allow the convenient choice of power cable or busbar connection with versatility of entry and connection. Current transformers are available as an option on series ECO 40, 43, 46 and 47 with single or dual output.



On C type family has been installed a new AVR panel. Terminal boards have been redesigned into a special L configuration, specifically to ease customer wiring; with this kind of terminal board it is possible to place a second terminal board in order to get 12 available terminals. Current transformers are available as an option on series ECO38 with single or dual output.

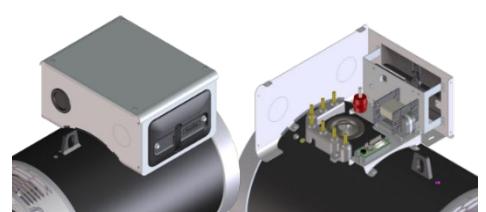

Ingress Protection

In addition to the protection on the windings themselves, alternators can increase the protection on the inlet side. Standard level is IP23 but the following solutions are also available: IP23 DP with inlet filters, IP23 with only terminal box in IP45, IP43 and IP45. Derates may be applied.



Info: https://www.meccalte.com/downloads/MA0605_Bulletin_IP.pdf

Excitation and Regulation Systems

All ECP/ECO series have MAUX auxiliary winding to power the digital regulator. Both DSR and the DER1 are available to connect to PC through the DxR2 USB interface and DxR TERMINAL software to interrogate/download alarms & settings for analysis or for cloning other regulators. DER2 has got an integrated USB connection and can be connected to the PC without any optional connection boards. More settings such as LAMS, digital RAM based synchronous external control and soft start are obtainable through the DxR connection. Simple analogue potentiometers are available for the more usual adjustments.

Excitation Systems	DSR	DER1	DER2
ECP3 to ECO38	Std	Option	Option
ECO40 to ECO46	-	Std	Option
ECO47	-	-	Std
Parallel Operation	✓	✓	✓
Mains Parallel	✓	✓	✓
3 Phase Sensing (rms)	-	✓	✓
Accuracy	+/-1%	+/-0.5%	+/-0.5%
Remote Voltage Control	✓	✓	✓
Alarm Log	✓	✓	✓
Analogue and Digital Configurable	✓	✓	✓
LAMS (Load Acceptance V/f)	✓	✓	✓
APO (Active Protection Output)	✓	✓	✓
Soft Start	✓	✓	✓
High dynamic response	-	-	✓
USB connection without external boards	-	-	✓

For a given motor start duty a smaller generator may be selected – as it has lower subtransient reactance values for non-linear loads. The whole range from 6.5 to 3400kVA is capable of >300% sustained short circuit current for up to 20 seconds.

Optional PMG


The Mecc Alte PMG is available on ECP28, ECP30, ECP32, ECP34 and ECO38 as factory-fitted option; alternatively, only the predisposition for the retrofit, for subsequent assembly, is available on option.



On ECO 40, 43 and 46 series it is available as a factory-fitted or retro-fitted options.


For ECO47 PMG is standard.

The complete AVR range is fully compatible with both MAUX and PMG systems, this minimises spare part management and flexibility of stock as one AVR suits all applications. The PMG is delivering the same amount of kVA available with the MAUX.

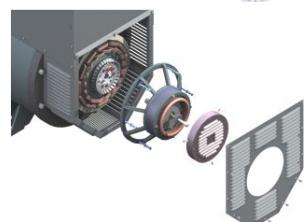

Dew Heater

Our entire range can be equipped with anti-condensation resistors of adequate power and sized for the alternator. Voltage for heaters must be specified when ordering. New cylindrical cartridge style heaters are available on request and it can be retrofitted.

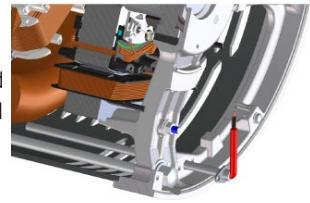

Accessories

Additional optionals can be fit on our alternator series, such as PTC thermistors or PT100 both on windings and bearings, dew heaters, high and low profile of terminal boxes (on most series), parallel devices, current and voltage transformers, air filters, IP43 and IP45 protections and many others.

For more info visit: <https://www.meccalte.com/en/products/alternators/accessories/c-type-accessories>

Deration coefficients

Altitude (meters)	Ambient temperature (Celsius)							
	25	40	45	50	55	60	65	70
≤ 1000	1.07	1	0.96	0.93	0.91	0.89	0.85	0.82
> 1000 ≤ 1500	1.01	0.96	0.92	0.89	0.87	0.84	0.81	0.77
> 1500 ≤ 2000	0.96	0.91	0.87	0.84	0.83	0.79	0.77	0.73
> 2000 ≤ 3000	0.90	0.85	0.81	0.78	0.76	0.73	0.71	0.68
> 3000 ≤ 4000	0.84	0.78	0.75	0.73	0.70	0.68	0.66	0.62
> 4000 ≤ 5000	0.78	0.72	0.69	0.67	0.65	0.62	0.59	0.56
> 5000 ≤ 6000	0.70	0.65	0.63	0.61	0.58	0.55	0.53	0.50

Notes on short circuit curves

The indicated coefficients have to be used to correct the three phase short circuit curves values as a function of the rated voltage. The indicated coefficient have to be used to correct the three phase short circuit curves values as a function of the type of short circuit voltage.

50 Hz		60 Hz		<i>Istantaneous</i>	<i>3 phase</i>	<i>2 phase L-L</i>	<i>1 phase L-N</i>
Voltage	Factor	Voltage	Factor				
380	0.93X	415	0.85X	1X	0.87X	1.30X	
400	1X	440	0.90X	1X	1.80X	3.20X	
415	1.04X	460	0.95X	1X	1.50X	2.50X	
440	1.10X	480	1X	20 sec.	10 sec.	4 sec.	

All the curves are shown for series or parallel star connection at 400V 50 Hz or 480V 60 Hz. If the unit is reconnected from series to parallel star, the additional coefficient is 2X. From series star to series delta, it is 1.72X. From series star to parallel delta, it is 3.44X.

General characteristics

Pole number	4	Insulation class	H
Phase number	3	Protection class	IP23
Number of wires	12	NDE Bearing type	6324.2RS
Execution	Brushless	DE Bearing type	6330
Regulator type	DER-1/A	Maximum Overspeed	2250
Winding pitch	2/3	Altitude	0-1000
Code voltage reference	T0405P3	Balancing	ISO1940-1

Ratings 50Hz

kVA / kW @ Temp. Rise / Ambient °C - 0.8 PF																									
STANDBY-163/27								STANDBY-150/40						H-125/40				F-105/40				B-80/40			
Series Star Y	760V	800V	830V	880V	760V	800V	830V	880V	760V	800V	830V	880V	760V	800V	830V	880V	760V	800V	830V	880V	760V	800V	830V	880V	
Parallel Star YY	380V	400V	415V	440V	380V	400V	415V	440V	380V	400V	415V	440V	380V	400V	415V	440V	380V	400V	415V	440V	380V	400V	415V	440V	
Series Delta Δ	440V	460V	480V	508V	440V	460V	480V	508V	440V	460V	480V	508V	440V	460V	480V	508V	440V	460V	480V	508V	440V	460V	480V	508V	
Parallel Delta ΔΔ	220V	230V	240V	254V	220V	230V	240V	254V	220V	230V	240V	254V	220V	230V	240V	254V	220V	230V	240V	254V	220V	230V	240V	254V	
ECO46 1S4 A	kVA	1650	1650	1650	1400	1552	1552	1552	1340	1500	1500	1500	1300	1350	1350	1350	1170	1200	1200	1200	1040				
	kW	1320	1320	1320	1120	1242	1242	1242	1072	1200	1200	1200	1040	1080	1080	1080	936	960	960	960	832				
ECO46 1.5S4 A	kVA	1800	1800	1800	1620	1700	1700	1700	1545	1650	1650	1650	1500	1480	1480	1480	1360	1320	1320	1320	1200				
	kW	1440	1440	1440	1296	1360	1360	1360	1236	1320	1320	1320	1200	1184	1184	1184	1088	1056	1056	1056	960				
ECO46 2S4 A	kVA	1944	1944	1944	1720	1863	1863	1863	1650	1800	1800	1800	1600	1600	1600	1600	1440	1440	1440	1440	1280				
	kW	1555	1555	1555	1376	1490	1490	1490	1320	1440	1440	1440	1280	1280	1280	1280	1152	1152	1152	1152	1024				
ECO46 1L4 A	kVA	2268	2268	2268	1990	2173	2173	2173	1900	2100	2100	2100	1850	1900	1900	1900	1660	1680	1680	1680	1480				
	kW	1814	1814	1814	1592	1738	1738	1738	1520	1680	1680	1680	1480	1520	1520	1520	1328	1344	1344	1344	1184				
ECO46 1.5L4 A	kVA	2500	2500	2500	2375	2380	2380	2380	2275	2300	2300	2300	2200	2050	2050	2050	1950	1840	1840	1840	1760				
	kW	2000	2000	2000	1900	1904	1904	1904	1820	1840	1840	1840	1760	1640	1640	1640	1560	1472	1472	1472	1408				
ECO46 2L4 A	kVA	2700	2700	2700	2450	2588	2588	2588	2350	2500	2500	2500	2280	2250	2250	2250	2050	2000	2000	2000	1824				
	kW	2160	2160	2160	1960	2070	2070	2070	1880	2000	2000	2000	1824	1800	1800	1800	1640	1600	1600	1600	1459				
ECO46 VL4 A	kVA	2916	3024	2916	2150	2795	2899	2795	2060	2700	2700	2700	2000	2400	2500	2400	1780	2160	2240	2160	1600				
	kW	2333	2419	2333	1720	2236	2319	2236	1648	2160	2240	2160	1600	1920	2000	1920	1424	1728	1792	1728	1280				

Ratings 60Hz

kVA / kW @ Temp. Rise / Ambient °C - 0.8 PF																									
STANDBY-163/27								STANDBY-150/40						H-125/40				F-105/40				B-80/40			
Series Star Y	830V	880V	920V	960V	830V	880V	920V	960V	830V	880V	920V	960V	830V	880V	920V	960V	830V	880V	920V	960V	830V	880V	920V	960V	
Parallel Star YY	415V	440V	460V	480V	415V	440V	460V	480V	415V	440V	460V	480V	415V	440V	460V	480V	415V	440V	460V	480V	415V	440V	460V	480V	
Series Delta Δ	480V	504V	530V	554V	480V	504V	530V	554V	480V	504V	530V	554V	480V	504V	530V	554V	480V	504V	530V	554V	480V	504V	530V	554V	
Parallel Delta ΔΔ	240V	254V	265V	277V	240V	254V	265V	277V	240V	254V	265V	277V	240V	254V	265V	277V	240V	254V	265V	277V	240V	254V	265V	277V	
ECO46 1S4 A	kVA	1728	1847	1944	1944	1656	1770	1875	1875	1600	1710	1800	1800	1440	1530	1620	1620	1280	1368	1440	1440	1440			
	kW	1382	1478	1555	1555	1325	1416	1500	1500	1280	1368	1440	1440	1152	1224	1296	1296	1024	1094	1152	1152	1152			
ECO46 1.5S4 A	kVA	1870	2030	2140	2140	1782	1936	2040	2040	1730	1880	1980	1980	1570	1690	1780	1780	1384	1504	1584	1584	1584			
	kW	1496	1624	1712	1712	1426	1549	1632	1632	1384	1504	1584	1584	1256	1352	1424	1424	1107	1203	1267	1267	1267			
ECO46 2S4 A	kVA	2116	2213	2332	2332	2028	2122	2236	2236	1950	2050	2160	2160	1750	1820	1920	1920	1560	1640	1728	1728	1728			
	kW	1693	1770	1866	1866	1622	1698	1789	1789	1560	1640	1728	1728	1400	1456	1536	1536	1248	1312	1382	1382	1382			
ECO46 1L4 A	kVA	2480	2582	2722	2722	2370	2473	2608	2608	2300	2390	2520	2520	2070	2150	2280	2280	1840	1912	2016	2016	1656	1720	1824	1824
	kW	1984	2066	2178	2178	1896	1978	2086	2086	1840	1912	2016	2016	1656	1720	1824	1824	1472	1530	1613	1613	1613			
ECO46 1.5L4 A	kVA	2613	2829	2980	2980	2508	2715	2860	2860	2420	2620	2760	2760	2150	2330	2460	2460								

Reactance & Time constants- Class H / 400V

Unsaturated (ref. EN60034-4)		ECO46 1S4 A	ECO46 1.5S4 A	ECO46 2S4 A	ECO46 1L4 A	ECO46 1.5L4 A	ECO46 2L4 A	ECO46 VL4 A
Xd	Direct-axis synchronous reactance %	273,5	296,4	273,7	253,8	289,1	270,4	282,9
X'd	Direct-axis transient reactance %	26,5	29,3	25,9	25,3	27,9	25,6	21
X"d	Direct-axis subtransient reactance %	13,4	14,3	12,7	12,3	13,6	12,4	11,6
Xq	Quadrature-axis synchronous reactance %	174,7	189,8	170,6	177,8	205,9	191,4	177,8
X'q	Quadrature-axis transient reactance %	174,7	189,8	170,6	177,8	205,9	191,4	177,8
X"q	Quadrature-axis subtransient reactance %	29,3	32,6	28,9	27,6	29,3	27	22,3
X2	Negative-sequence reactance %	19,2	20,5	18,1	17,5	19,4	17,5	14,2
X0	Zero sequence reactance %	4,26	4,78	4,06	3,85	4,58	3,89	3,1
Saturated								
Xd	Direct-axis synchronous reactance %	227	246	227,2	210,7	240	224,4	234,8
X'd	Direct-axis transient reactance %	22	24,3	21,5	21	23,2	21,2	17,4
X"d	Direct-axis subtransient reactance %	11,1	11,9	10,5	10,2	11,3	10,3	9,63
Xq	Quadrature-axis synchronous reactance %	145	157,5	141,6	147,6	170,9	158,9	147,6
X'q	Quadrature-axis transient reactance %	145	157,5	141,6	147,6	170,9	158,9	147,6
X"q	Quadrature-axis subtransient reactance %	24,3	27,1	24	22,9	24,3	22,4	18,5
X2	Negative-sequence reactance %	15,9	17	15	14,5	16,1	14,5	11,8
X0	Zero sequence reactance %	4,26	4,78	4,06	3,85	4,58	3,89	3,1
Kcc	Short circuit ratio	0,44	0,41	0,44	0,47	0,42	0,45	0,43
T'd	Transient time constant sec	0,25	0,264	0,258	0,265	0,27	0,275	0,4
T"d	Subtransient time constant sec	0,021	0,024	0,023	0,022	0,022	0,024	0,023
T'do	Open circuit time constant sec	9,5	10,8	10,4	11	10,4	12,5	7,8
Ta	Armature time constant sec	0,027	0,03	0,029	0,031	0,031	0,034	0,04

Additional information - Class H / 400V

I_o	Excitation current at no load	A	0,7	1,2	0,8	0,9	1,3	1,0	1,4
I_c	Excitation current at full load	A	3,2	3,6	3,2	3,1	3,7	3,1	3,2
Overload									
Overload per 20 sec. PRP or 10 sec. COP %									
Heat dissipation W									
Telephone Harmonic Factor - THF %									
Waveform Distors.(THD) full load LL/LN %									
Waveform Distors.(THD) no load LL/LN %									

Reactance & Time constants- Class H / 480V








Unsaturated (ref. EN60034-4)		ECO46 1S4 A	ECO46 1.5S4 A	ECO46 2S4 A	ECO46 1L4 A	ECO46 1.5L4 A	ECO46 2L4 A	ECO46 VL4 A
X_d	Direct-axis synchronous reactance %	273,5	296,4	273,7	253,8	289,1	270,4	287,1
X'_d	Direct-axis transient reactance %	26,5	29,3	25,9	25,3	27,9	25,6	21,3
X"_d	Direct-axis subtransient reactance %	13,4	14,3	12,7	12,3	13,6	12,4	11,8
X_q	Quadrature-axis synchronous reactance %	174,7	189,8	170,6	177,8	205,9	191,4	180,4
X'_q	Quadrature-axis transient reactance %	174,7	189,8	170,6	177,8	205,9	191,4	180,4
X"_q	Quadrature-axis subtransient reactance %	29,3	32,6	28,9	27,6	29,3	27	22,6
X₂	Negative-sequence reactance %	19,2	20,5	18,1	17,5	19,4	17,5	14,4
X₀	Zero sequence reactance %	4,26	4,78	4,06	3,85	4,58	3,89	3,15
Saturated								
X_d	Direct-axis synchronous reactance %	227	246	227,2	210,7	240	224,4	238,3
X'_d	Direct-axis transient reactance %	22	24,3	21,5	21	23,2	21,2	17,7
X"_d	Direct-axis subtransient reactance %	11,1	11,9	10,5	10,2	11,3	10,3	9,79
X_q	Quadrature-axis synchronous reactance %	145	157,5	141,6	147,6	170,9	158,9	149,7
X'_q	Quadrature-axis transient reactance %	145	157,5	141,6	147,6	170,9	158,9	149,7
X"_q	Quadrature-axis subtransient reactance %	24,3	27,1	24	22,9	24,3	22,4	18,8
X₂	Negative-sequence reactance %	15,9	17	15	14,5	16,1	14,5	12
X₀	Zero sequence reactance %	4,26	4,78	4,06	3,85	4,58	3,89	3,15
K_{cc}	Short circuit ratio	0,44	0,41	0,44	0,47	0,42	0,45	0,42
T'_d	Transient time constant sec	0,25	0,264	0,258	0,265	0,27	0,275	0,4
T"_d	Subtransient time constant sec	0,021	0,024	0,023	0,022	0,022	0,024	0,023
T'do	Open circuit time constant sec	9,5	10,8	10,4	11	10,4	12,5	7,8
T_a	Armature time constant sec	0,027	0,03	0,029	0,031	0,031	0,034	0,04

Additional information - Class H / 480V

I₀	Excitation current at no load	A	0,7	1,2	0,8	0,9	1,3	1,0	1,4
I_c	Excitation current at full load	A	3,2	3,6	3,2	3,1	3,7	3,1	3,2
Overload									
Overload per 20 sec. PRP or 10 sec. COP %									
Heat dissipation	W	53776	57451	60820	66645	70638	71679	78584	
Telephone Interference Factor - TIF		<40	<40	<40	<40	<40	<40	<40	
Waveform Distors.(THD) full load LL/LN	%	3 / 2,9	3,3 / 3,2	3,4 / 3,3	3,3 / 2,9	2,8 / 2,8	2,7 / 2,8	2,6 / 2,5	
Waveform Distors.(THD) no load LL/LN	%	2,5 / 2,4	2,9 / 3	2,9 / 2,8	2,7 / 2,6	2,9 / 2,9	2,8 / 2,6	2,7 / 2,5	








Efficiencies @ 50Hz

Models		380V 50Hz					400V 50Hz					415V 50Hz					440V 50Hz				
		0.25	0.5	0.75	1	1.1	0.25	0.5	0.75	1	1.1	0.25	0.5	0.75	1	1.1	0.25	0.5	0.75	1	1.1
ECO46 1S4 A	%	95,3	96,0	96,7	96,3	96,1	95,3	95,9	96,4	96,2	96,1	95,1	95,9	96,5	96,0	95,6	94,6	95,5	96,0	95,8	95,6
ECO46 1.5S4 A	%	93,8	96,1	96,8	96,4	96,2	93,8	96,0	96,5	96,3	96,1	93,6	96,1	96,6	96,1	95,7	93,1	95,7	96,4	95,9	95,6
ECO46 2S4 A	%	95,6	96,3	96,8	96,5	96,3	95,6	96,2	96,5	96,4	96,3	95,4	96,2	96,6	96,2	95,8	94,9	95,7	96,1	96,0	95,9
ECO46 1L4 A	%	95,6	96,5	97,1	96,7	96,5	95,6	96,4	96,8	96,6	96,5	95,4	96,4	96,9	96,4	96,0	94,9	95,8	96,4	96,2	96,1
ECO46 1.5L4 A	%	94,0	96,5	97,2	96,8	96,6	94,0	96,4	96,9	96,7	96,6	93,8	96,5	97,0	96,5	96,1	93,3	96,1	96,8	96,3	96,1
ECO46 2L4 A	%	95,6	96,7	97,3	96,9	96,7	95,9	96,6	97,0	96,8	96,6	95,7	96,6	97,1	96,6	96,2	95,1	96,0	96,5	96,4	96,3
ECO46 VL4 A	%	95,9	96,7	97,2	97,0	96,8	95,8	96,6	97,1	96,9	96,7	95,6	96,4	96,9	96,7	96,5	93,6	94,9	95,8	96,0	95,9

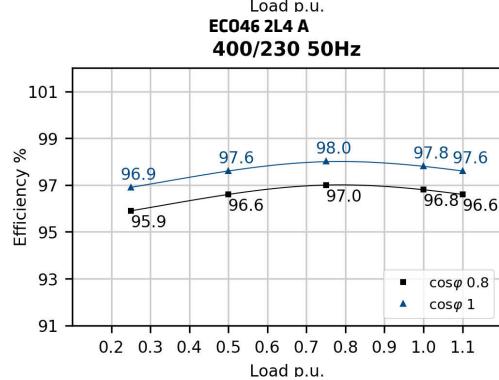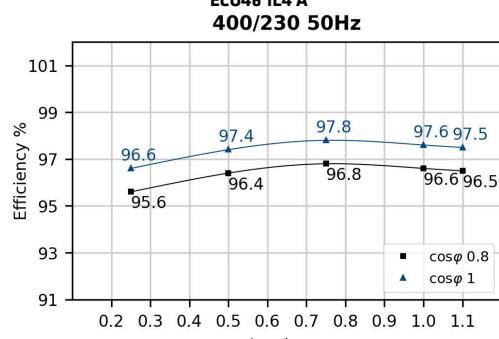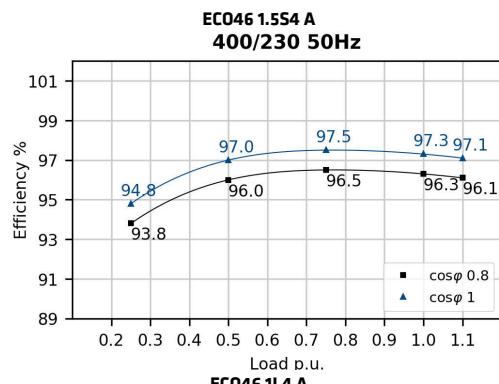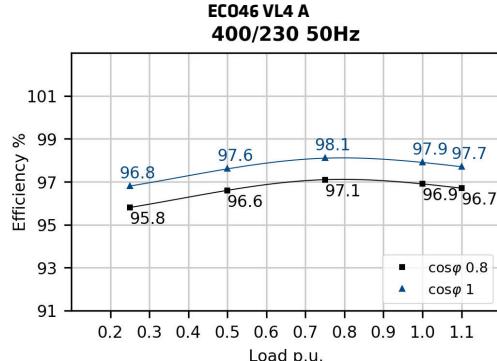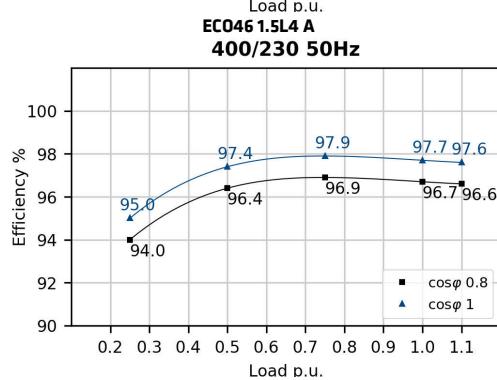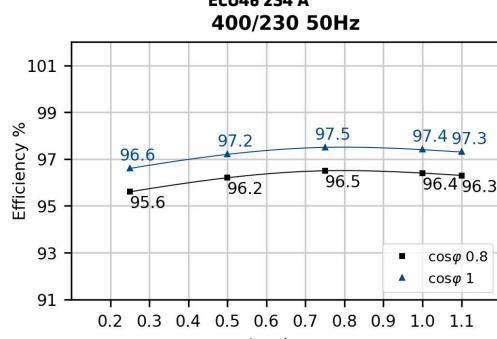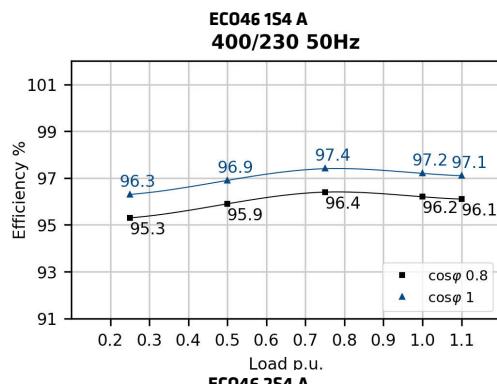


Efficiencies @ 60Hz

Models		415V 60Hz					440V 60Hz					460V 60Hz					480V 60Hz				
		0.25	0.5	0.75	1	1.1	0.25	0.5	0.75	1	1.1	0.25	0.5	0.75	1	1.1	0.25	0.5	0.75	1	1.1
ECO46 1S4 A	%	94,8	95,6	96,2	96,1	95,9	95,2	96,0	96,5	96,3	96,2	95,3	96,2	96,9	96,5	96,3	95,4	96,1	96,6	96,4	96,3
ECO46 1.5S4 A	%	93,9	96,0	96,3	96,1	95,9	93,9	96,1	96,6	96,6	96,5	93,9	96,3	96,8	96,8	96,7	93,9	96,2	96,6	96,5	96,4
ECO46 2S4 A	%	95,0	95,8	96,3	96,2	96,1	95,6	96,3	96,6	96,5	96,4	95,8	96,5	97,0	96,7	96,5	95,8	96,4	96,7	96,6	96,5
ECO46 1L4 A	%	95,3	96,1	96,6	96,5	96,4	95,9	96,5	96,9	96,7	96,6	95,8	96,7	97,3	96,9	96,7	95,9	96,6	97,0	96,8	96,7
ECO46 1.5L4 A	%	94,2	96,5	96,8	96,5	96,3	94,2	96,6	97,1	97,0	96,9	94,2	96,8	97,3	97,2	97,1	94,2	96,7	97,1	96,9	96,8
ECO46 2L4 A	%	95,6	96,4	96,9	96,8	96,7	96,2	96,8	97,2	97,0	96,9	96,2	97,0	97,6	97,2	97,0	96,2	96,9	97,3	97,1	97,0
ECO46 VL4 A	%	94,8	95,7	96,6	96,5	96,4	95,6	96,5	97,3	97,2	97,1	95,8	96,8	97,5	97,4	97,3	95,7	96,6	97,3	97,2	97,1

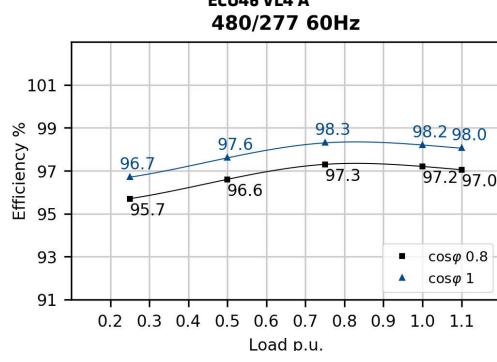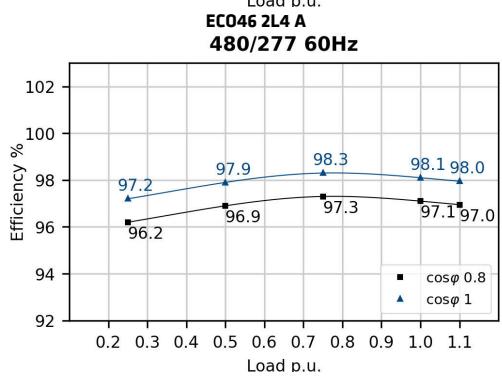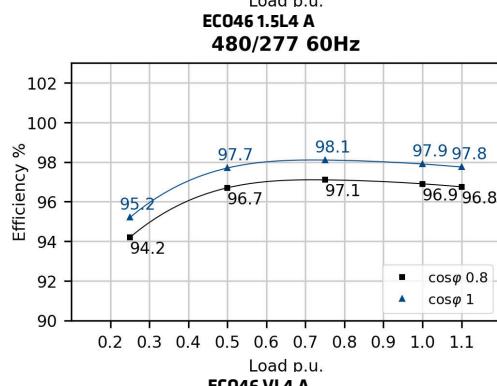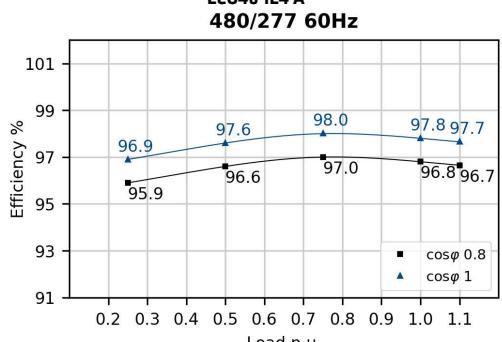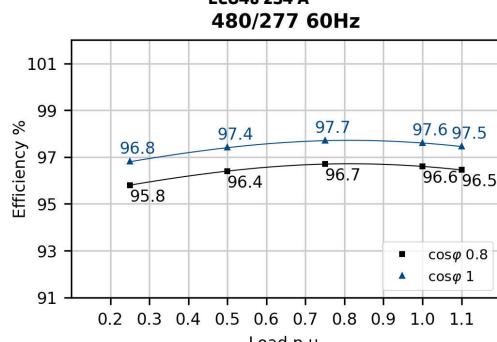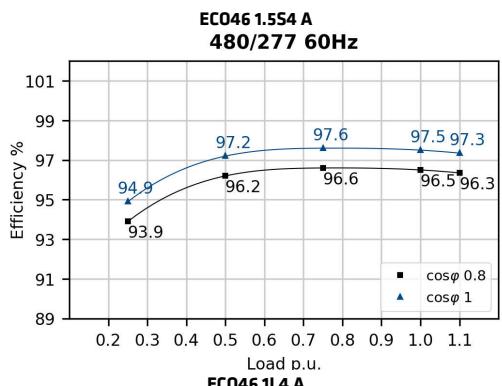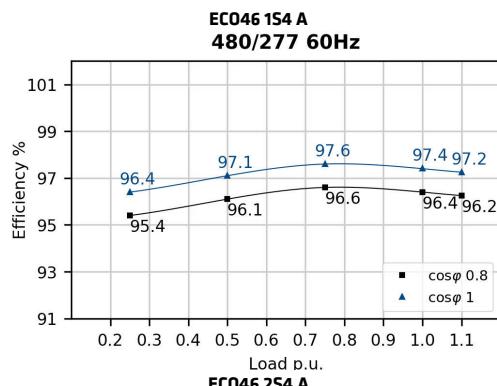

Transients voltage

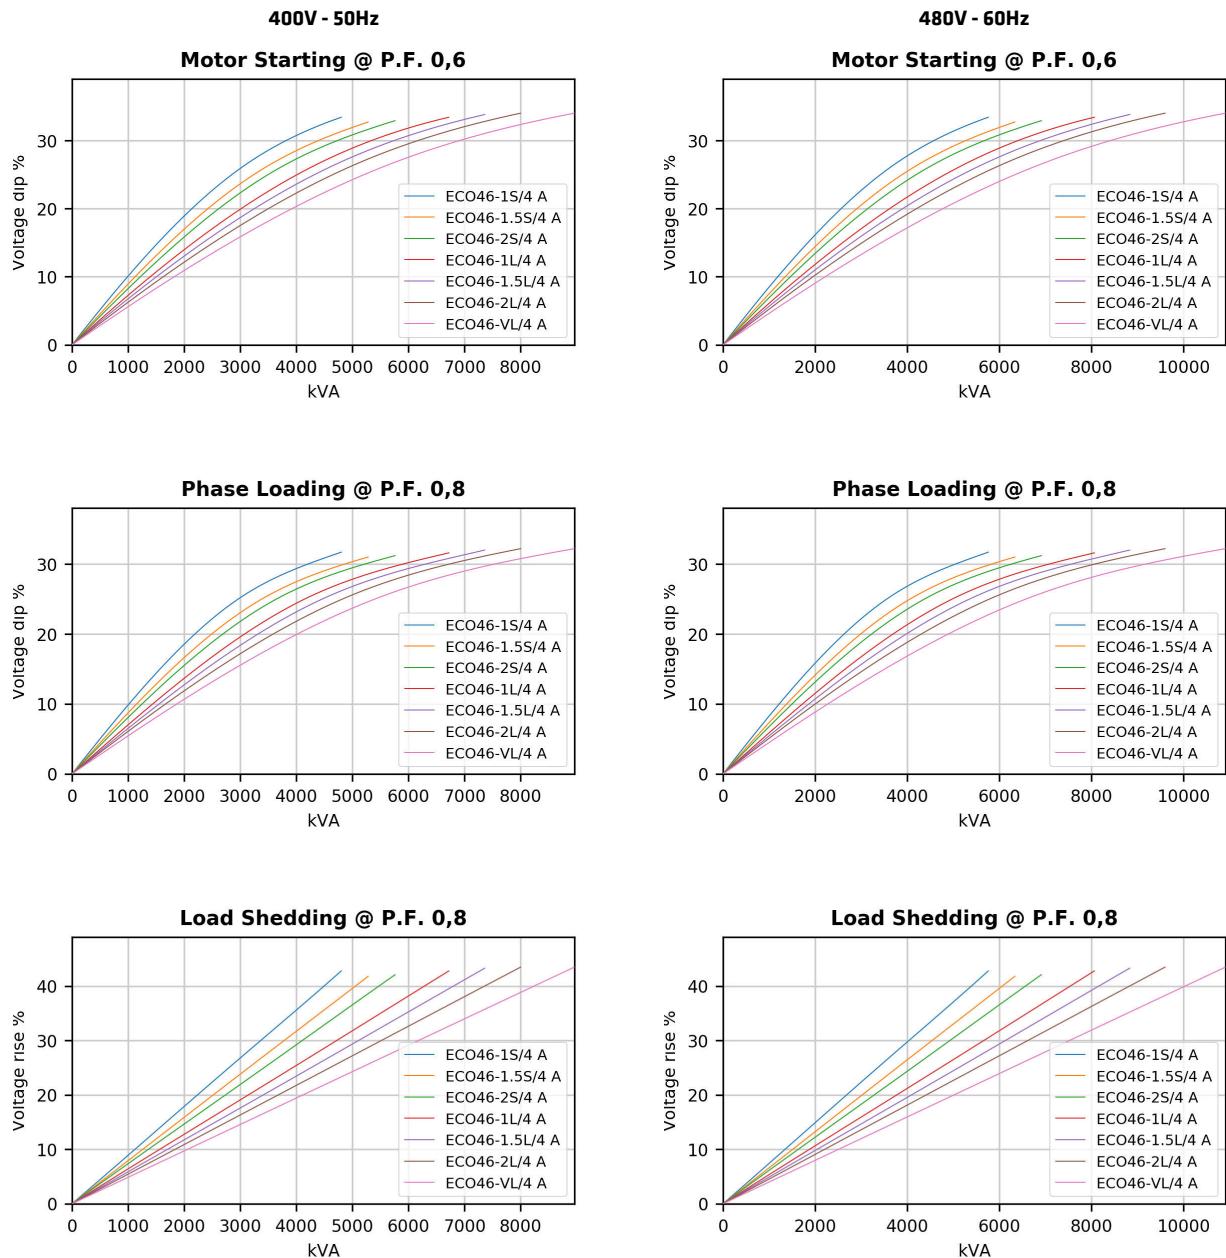

In order to scale transient curves as a function of a power factor or voltage if not indicated, please proceed as follows:

Power Factor coefficient corrector (PFCC), to be used on power factor 0.6 curves:

$$\text{PFCC} = \sin(\text{ARCcos(PFnew)}) / 0.8$$

Example. The PFCC at power factor 0.3 is 1.192 [$\text{PFCC} = \sin(\text{ARCcos}(0.3)) / 0.8$]. This means that the voltage fall at a given power at pf 0.3 is equivalent to the one that can be read on the pf 0.6 curve if the load is considered 1.192 times bigger (19% higher value.).

In this example, a 100 kVA load insertion at pf 0.3 is equivalent in voltage fall to a 119kVA load insertion at pf 0.6.

Voltage coefficient corrector (VCC):


$$\text{VCC} = (400/\text{Vnew})^2 \text{ if } 50 \text{ Hz; } \text{VCC} = (480/\text{Vnew})^2 \text{ if } 60 \text{ Hz}$$

Example. VCC at 415V 60 Hz is 1.338 [$\text{VCC} = (480/415)^2$]. This means that the voltage fall at a given power at 415V is equivalent to the one that can be read on the power factor 0.6 curve if the load is considered 1.338 times bigger (33% higher value.).


In this example, a 100 kVA load insertion at 415V is equivalent in voltage fall to a 133kVA load insertion at 480V.

50Hz Short circuit decrement curves - No load excitation at rated speed


ECO46 1S4 A

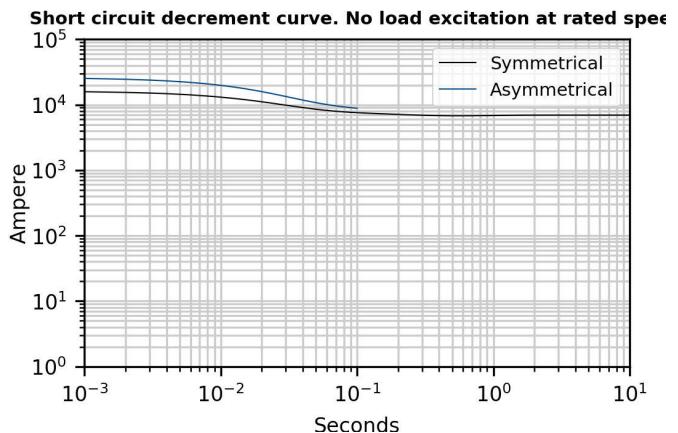


ECO46 1.5S4 A

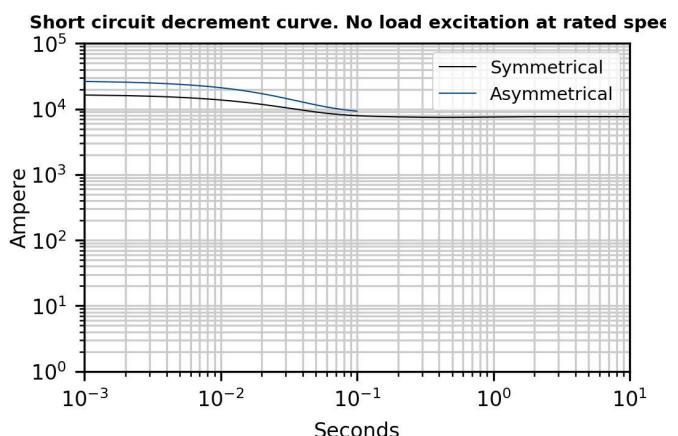

ECO46 2S4 A

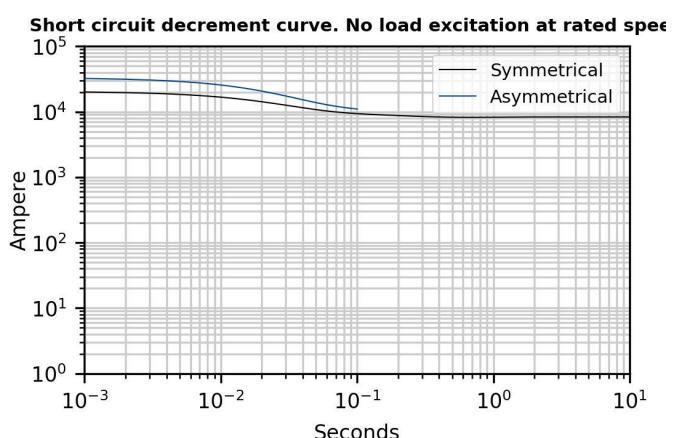


ECO46 1L4 A

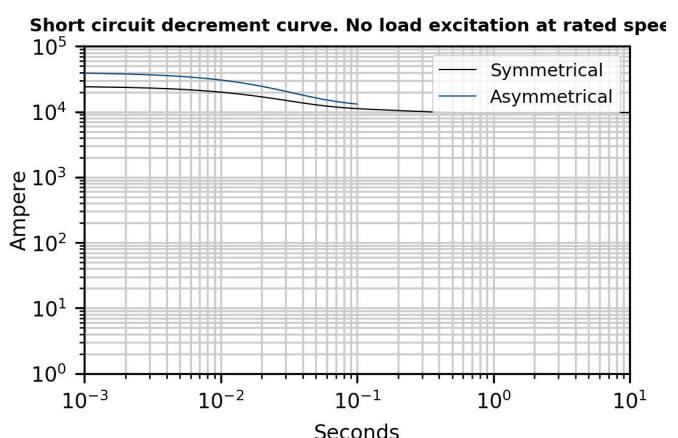


*Please refer to tables at page 6

50Hz Short circuit decrement curves - No load excitation at rated speed


ECO46 1.5L4 A

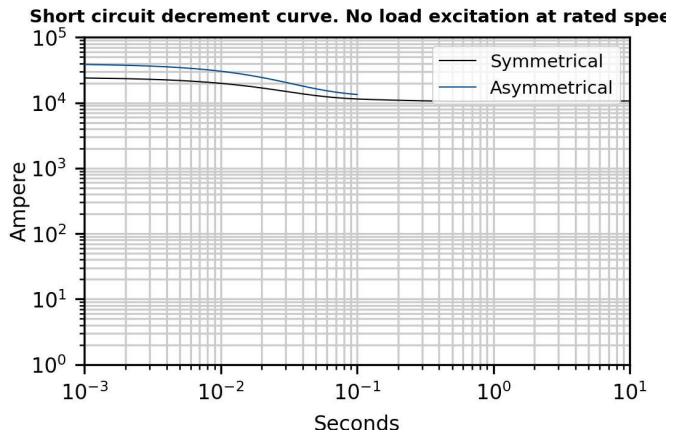

ECO46 2L4 A

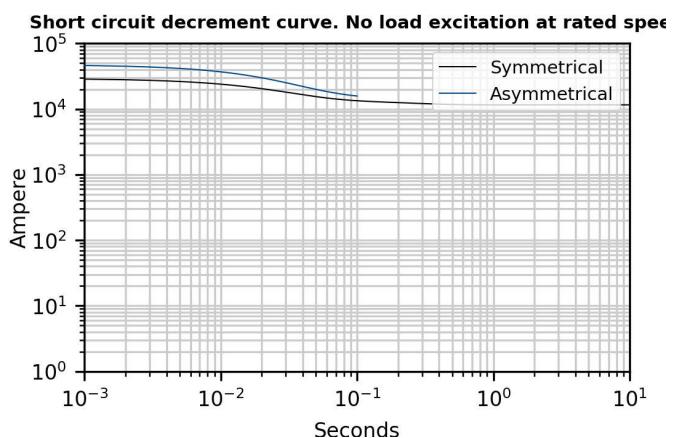


ECO46 VL4 A

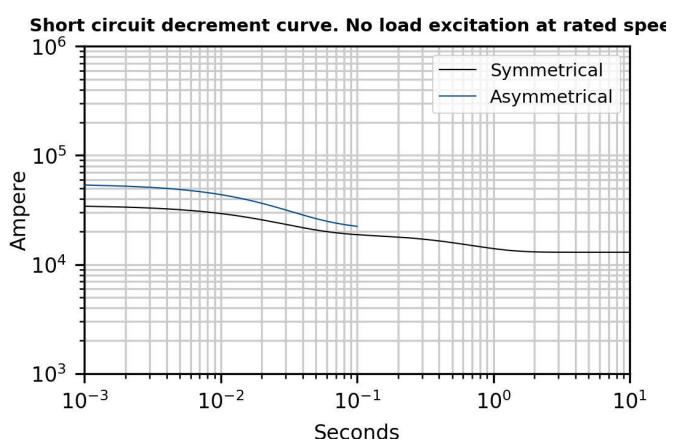


*Please refer to tables at page 6

60Hz Short circuit decrement curves - No load excitation at rated speed


ECO46 1S4 A

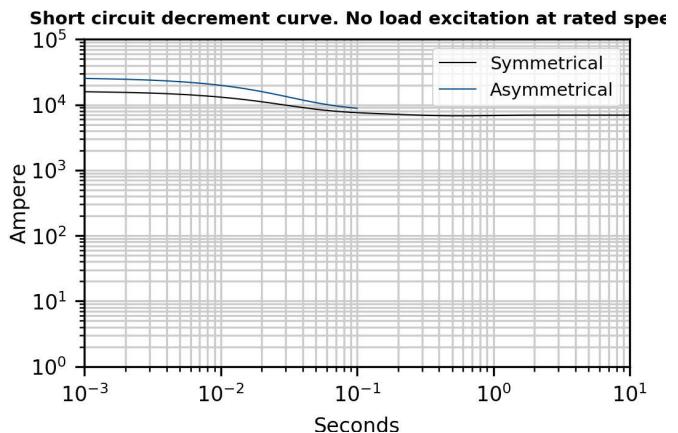


ECO46 1.5S4 A

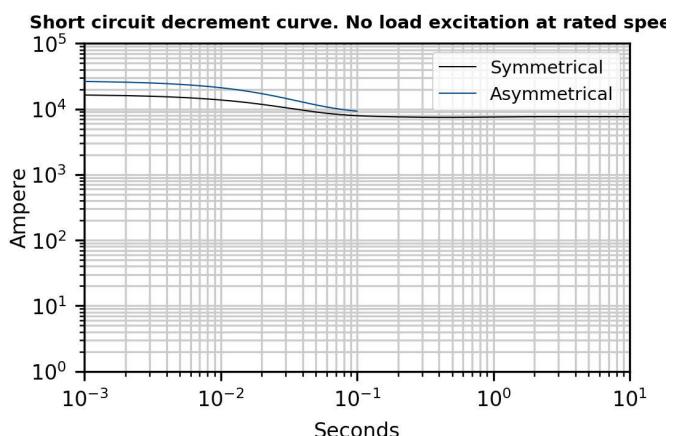

ECO46 2S4 A

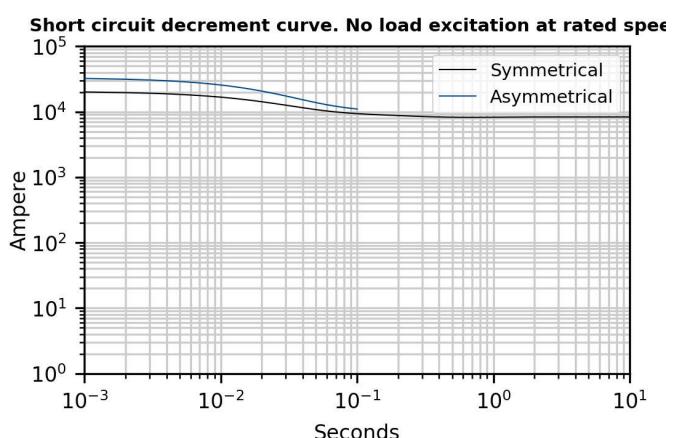


ECO46 1L4 A

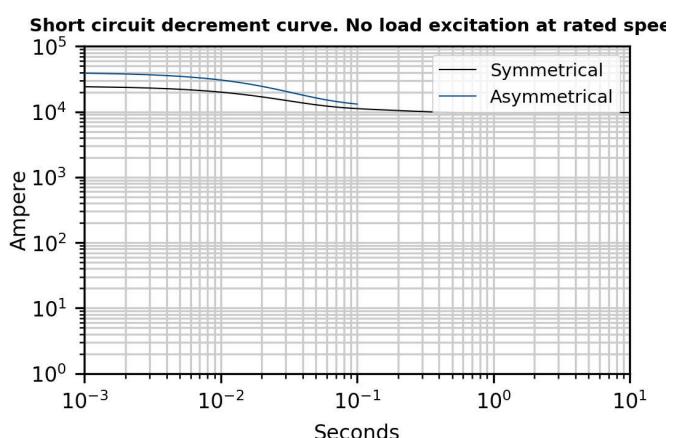


*Please refer to tables at page 6

60Hz Short circuit decrement curves - No load excitation at rated speed


ECO46 1.5L4 A

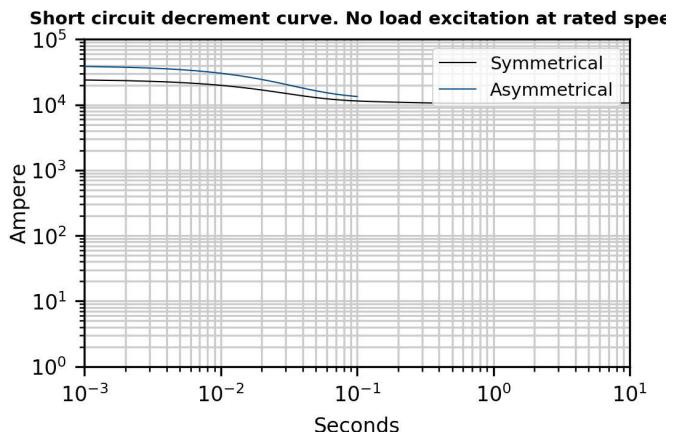

ECO46 2L4 A

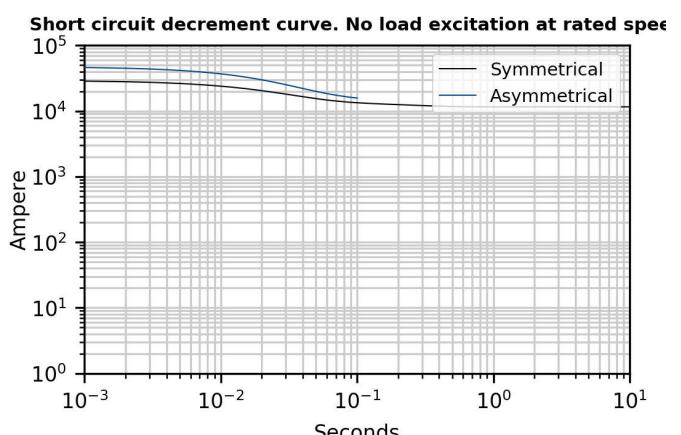

ECO46 VL4 A

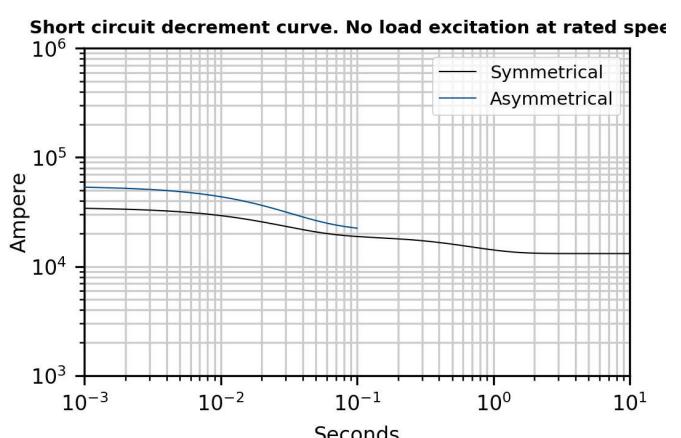


*Please refer to tables at page 6

Additional Characteristics


Data	ECO46 1S4 A		ECO46 1.5S4 A		ECO46 2S4 A		ECO46 1L4 A		ECO46 1.5L4 A		ECO46 2L4 A		ECO46 VL4 A	
	50Hz	60Hz	50Hz	60Hz	50Hz	60Hz	50Hz	60Hz	50Hz	60Hz	50Hz	60Hz	50Hz	60Hz
Damper cage	Copper													
Stator Winding Resistance (20°C)	Ω	0,00584		0,00405		0,00304		0,0024		0,00381		0,00234		0,00189
Rotor Winding Resistance (20°C)	Ω	3,05		3,319		3,5		3,977		4,27		4,5		5,18
Stator Exciter Resistance (20°C)	Ω	12,9		12,9		12,9		12,9		12,9		12,9		12,9
Rotor Exciter Resistance (20°C)	Ω	0,12		0,12		0,12		0,12		0,12		0,12		0,12
Auxiliary Winding Resistance (20°C)	Ω	0,414		0,35		0,33		0,36		0,4		0,39		0,41
Weight of complete generator	kg	3005,0		3375,0		3560,0		3805,0		4255,0		4375,0		5120,0
Unbalanced magnetic pull	kN/mm	6,4		6,4		6,5		6,8		6,9		7,0		8,0
Air flow	m³/min	135,0	162,0	135,0	162,0	135,0	162,0	135,0	162,0	135,0	162,0	135,0	162,0	135,0
Noise level at 1m/7m	dB(A)	97/86	100/91	97/86	100/91	97/86	100/91	97/86	100/91	97/86	100/91	97/86	100/91	97/86

PQ Diagram

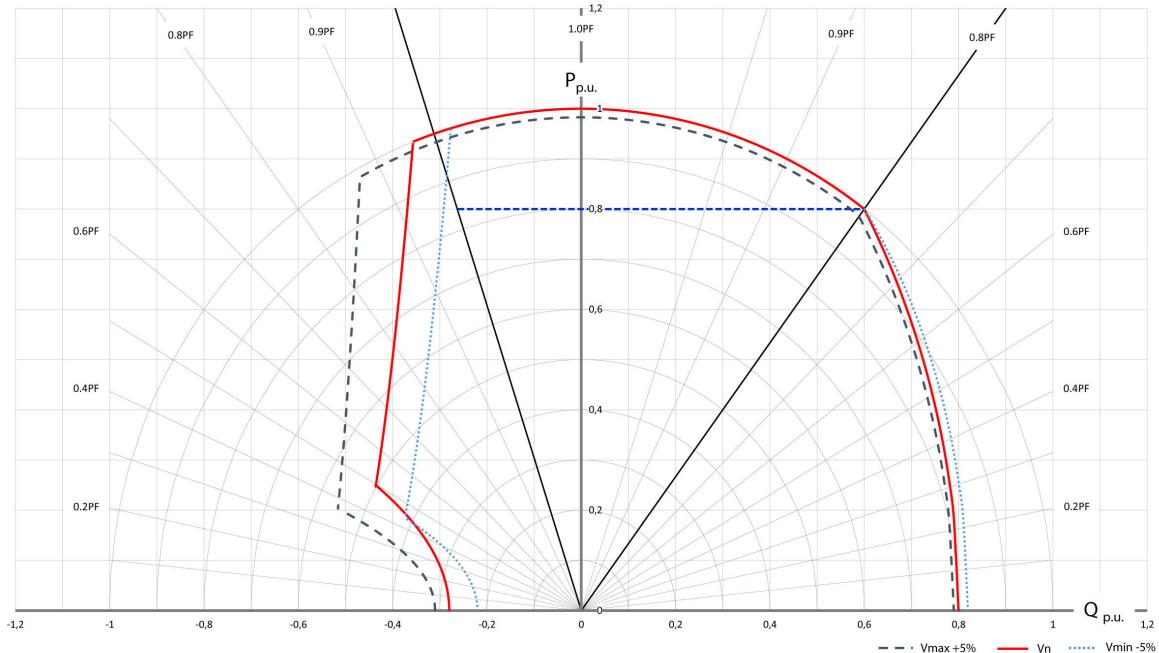


ECO46 1S4 A

TWO BEARING MOMENTS OF INERTIA

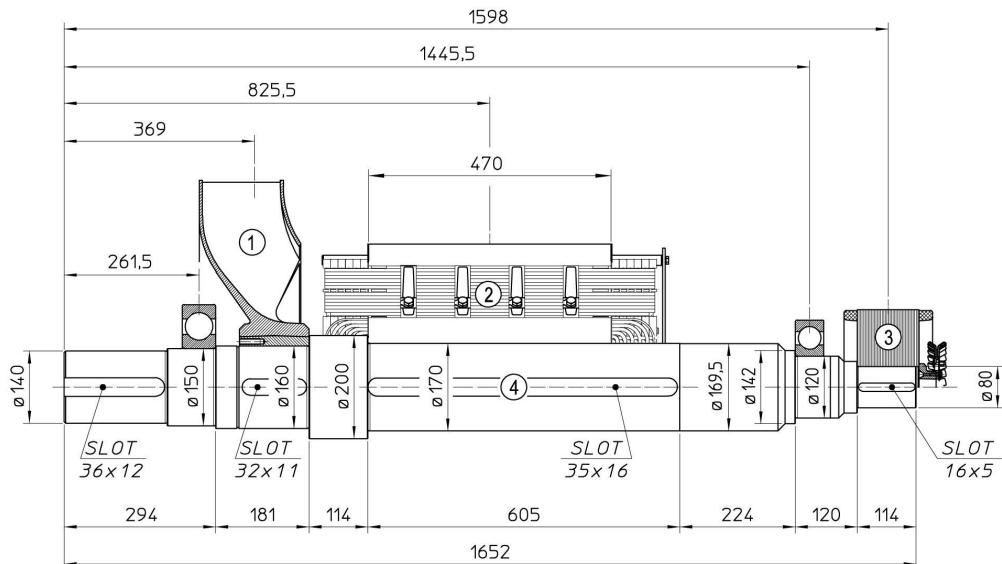

POS.	COMPONENT	WEIGHT (kg)	$J (\text{kgm}^2)$
1	FAN	42.4	2.2323
2	MAIN ROTOR	702.2	27.4802
3	EX. ROTOR	59.8	0.7260
4	SHAFT	248.3	0.8445
TOTAL		1052.7	31.2830


TWO BEARING DIMENSIONS

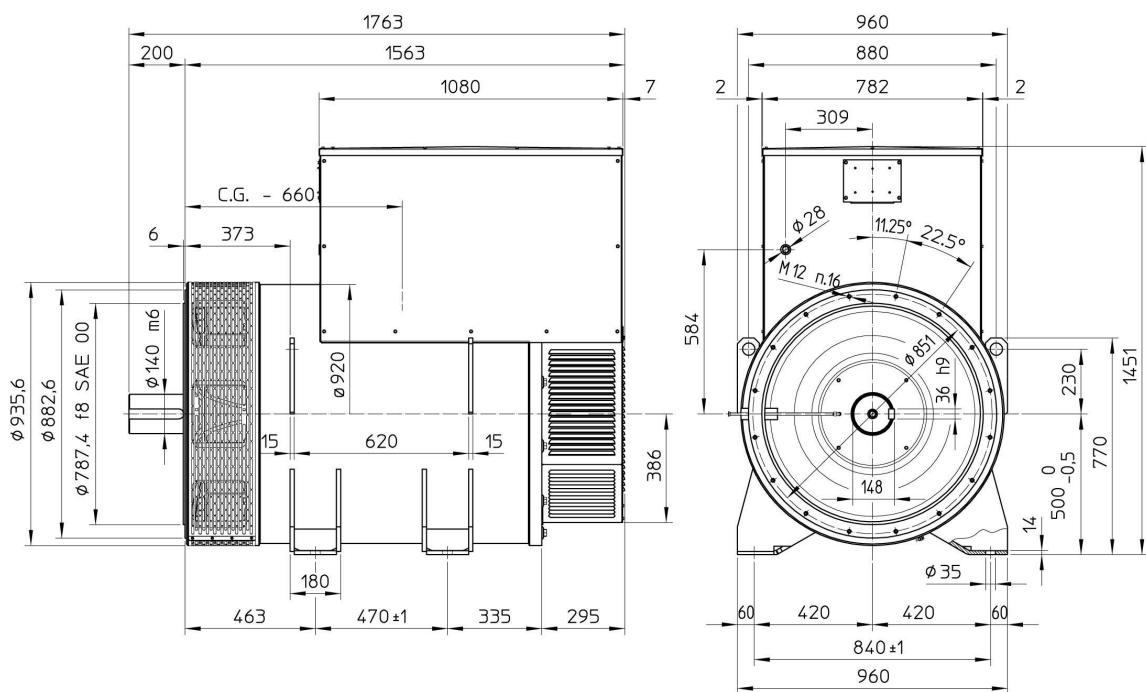

C.G.= GRAVITY CENTER

ECO46 1S4 A


SINGLE BEARING MOMENTS OF INERTIA

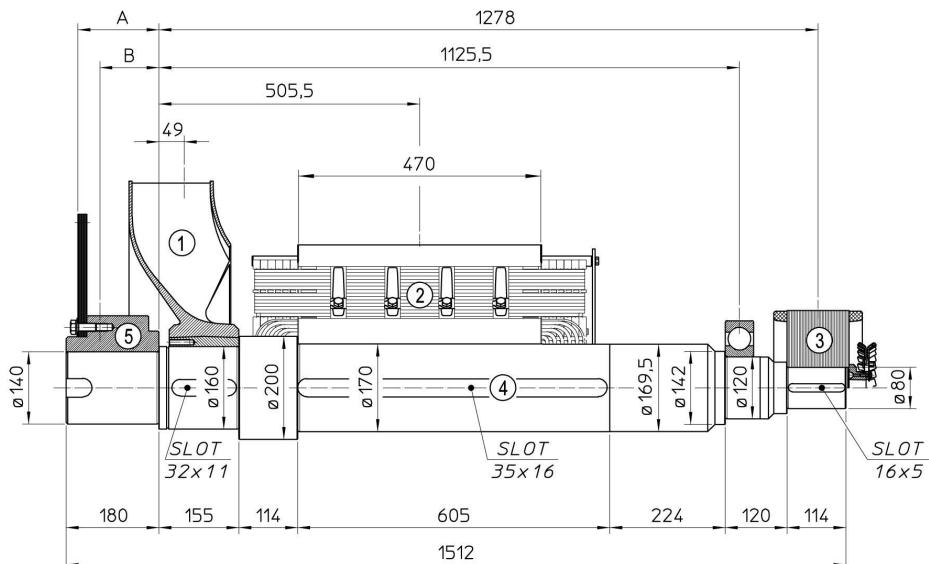

POS.	COMPONENT	WEIGHT (kg)	J (kgm ²)
1	FAN	42.4	2.2323
2	MAIN ROTOR	702.2	27.4802
3	EX. ROTOR	59.8	0.7260
4	SHAFT	229.3	0.7912
TOTAL		1033.7	31.2297

POS.	COMPONENT	SAE N°	A	B	WEIGHT (kg)	J (kgm ²)
5	SHAFTS COUPLING FLEX PLATE	18	172.7	113.4	82.9	1.8652
		21	157.0	114.6	93.8	3.2090

SINGLE BEARING DIMENSIONS

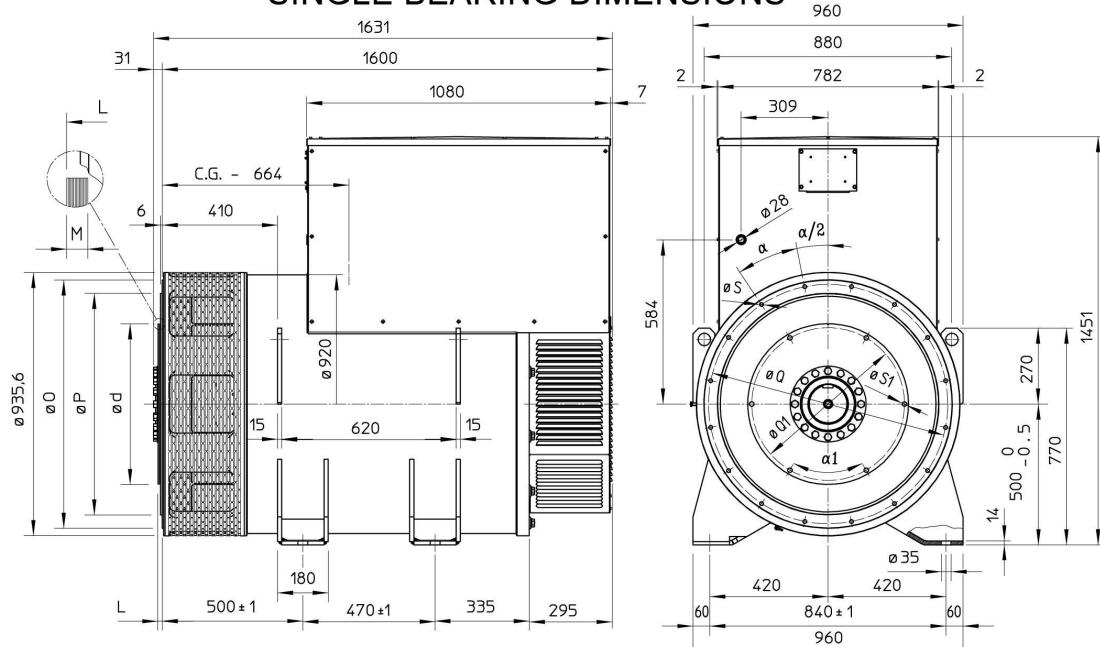


SAE N.	FLANGE/FLANGE BRIDE/FLANSCH				
	O	P	Q	S	α
00	883	787.4	850.9	14	22.5°
0	711	647.7	679.5	14	22.5°

SAE N.	GIUNTA DISCHI / DISC COUPLING DISQUE DE MONOPALIER / SCHEIBENKUPPLUNG					
	d	L	M	Q1	S1	α1
18	571.5	15.7	15	542.92	16.5	60°
21	673.1	0	17	641.35	16.5	30°

C.G.= GRAVITY CENTER


ECO46 1.5S4 A

TWO BEARING MOMENTS OF INERTIA

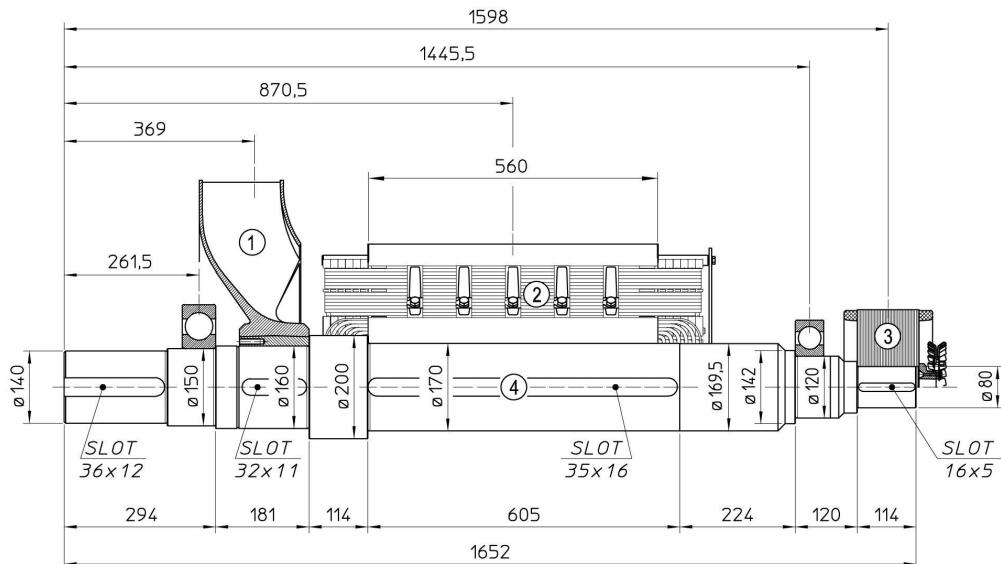


POS.	COMPONENT	WEIGHT (kg)	$J (\text{kgm}^2)$
1	FAN	42.4	2.2323
2	MAIN ROTOR	837.9	32.8507
3	EX. ROTOR	59.8	0.7260
4	SHAFT	248.3	0.8445
TOTAL		1188.4	36.6535

TWO BEARING DIMENSIONS

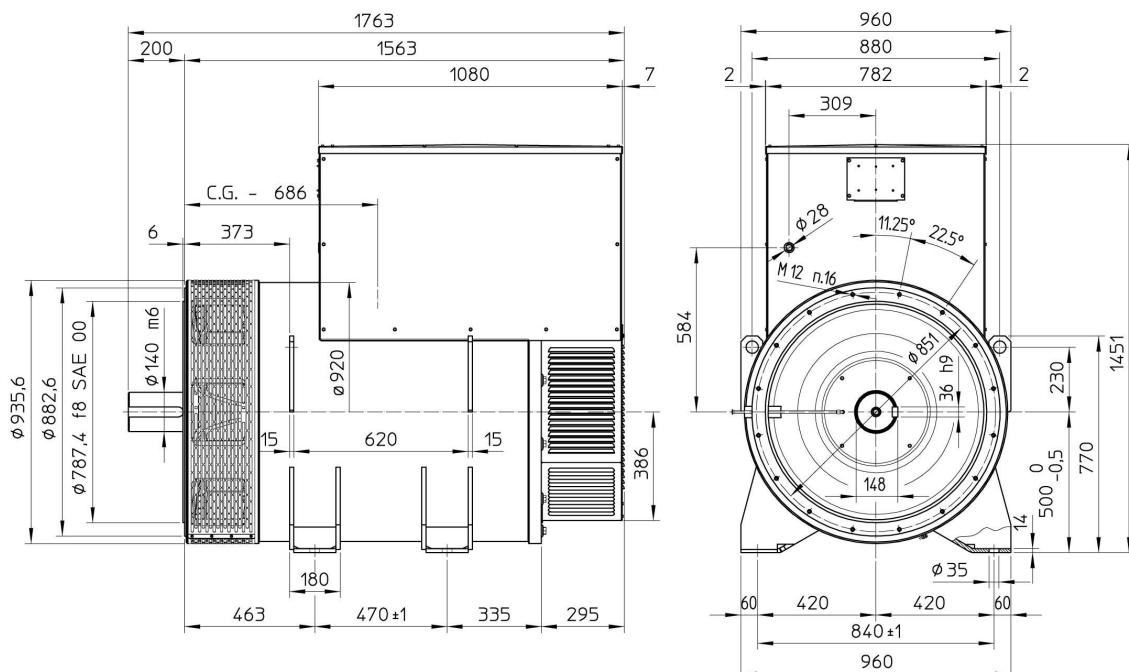

ECO46 1.5S4 A


SINGLE BEARING MOMENTS OF INERTIA

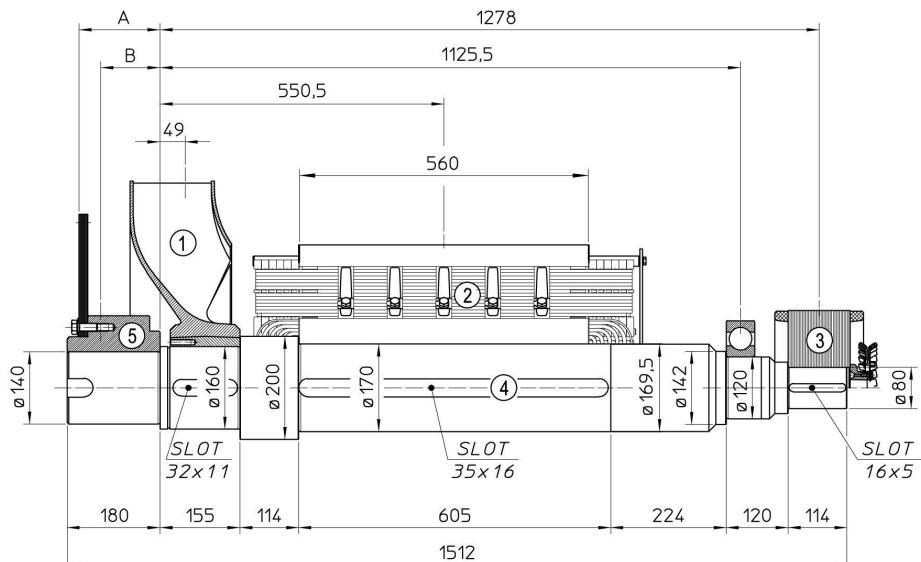

POS.	COMPONENT	WEIGHT (kg)	J (kgm ²)
1	FAN	42.4	2.2323
2	MAIN ROTOR	837.9	32.8507
3	EX. ROTOR	59.8	0.7260
4	SHAFT	229.3	0.7912
TOTAL		1169.4	36.6002

POS.	COMPONENT	SAE N°	A	B	WEIGHT (kg)	J (kgm ²)
5	SHAFTS COUPLING FLEX PLATE	18	172.7	113.4	82.9	1.8652
		21	157.0	114.6	93.8	3.2090

SINGLE BEARING DIMENSIONS

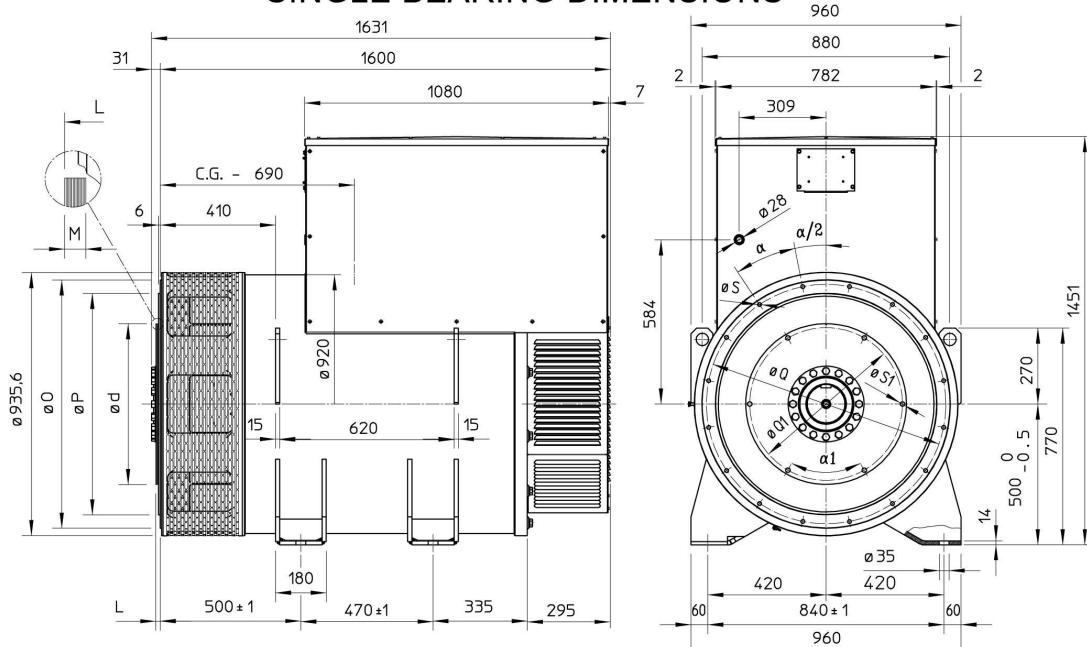


SAE N.	FLANGE/FLANGE BRIDE/FLANSCH				
	O	P	Q	S	α
00	883	787.4	850.9	14	22.5°
0	711	647.7	679.5	14	22.5°

SAE N.	GIUNTA DISCHI / DISC COUPLING DISQUE DE MONOPALIER / SCHEIBENKUPPLUNG					
	d	L	M	Q1	S1	$\alpha1$
18	571.5	15.7	15	542.92	16.5	60°
21	673.1	0	17	641.35	16.5	30°

C.G.= GRAVITY CENTER


ECO46 2S4 A

TWO BEARING MOMENTS OF INERTIA

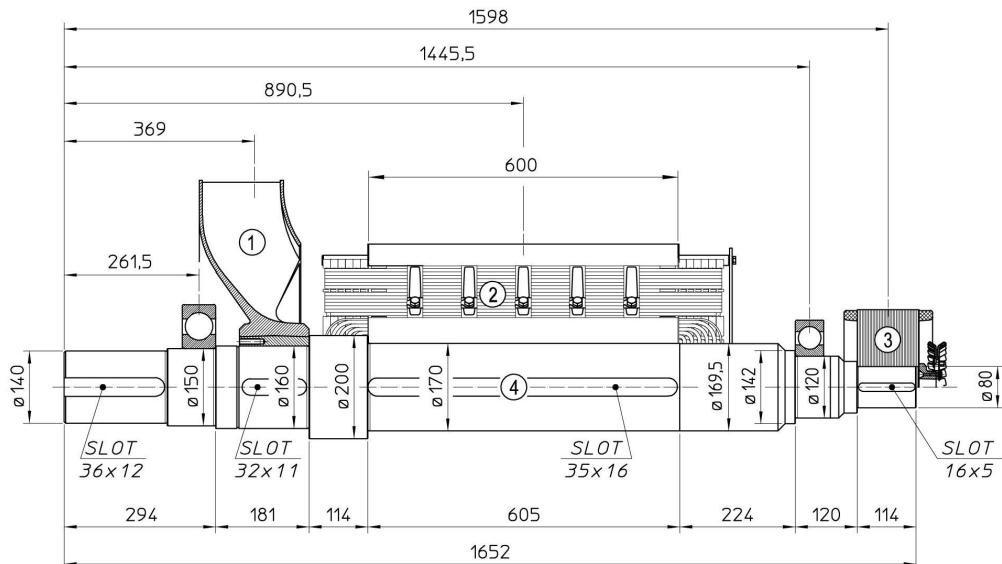

POS.	COMPONENT	WEIGHT (kg)	$J (\text{kgm}^2)$
1	FAN	42.4	2.2323
2	MAIN ROTOR	895.5	35.1154
3	EX. ROTOR	59.8	0.7260
4	SHAFT	248.3	0.8445
TOTAL		1246.0	38.9182


TWO BEARING DIMENSIONS

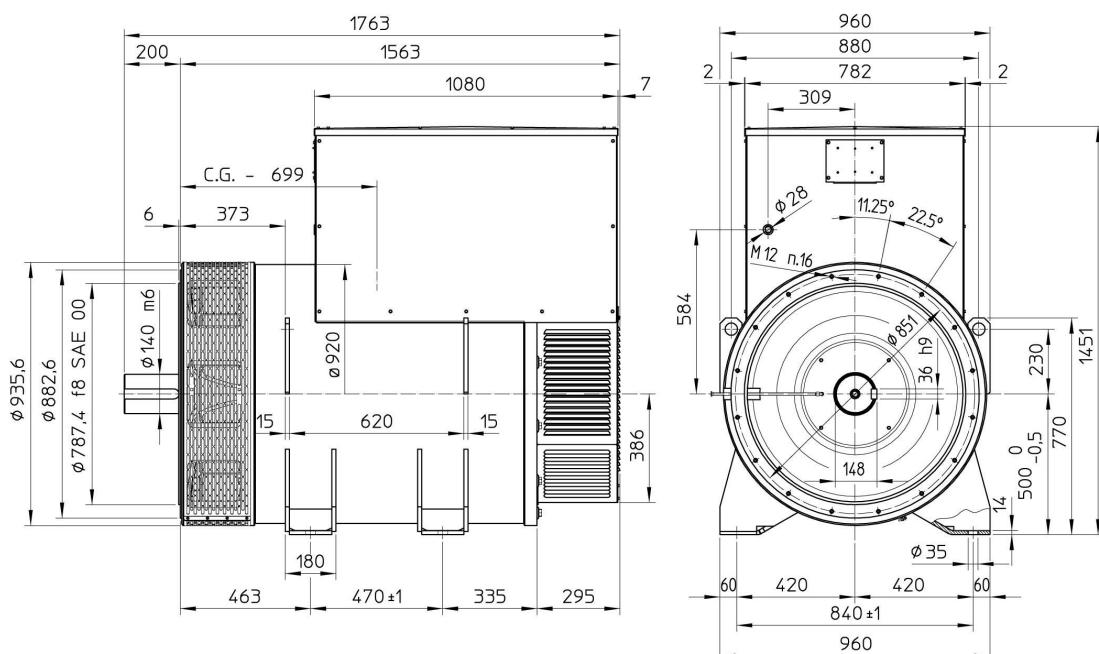

C.G.= GRAVITY CENTER

ECO46 2S4 A


SINGLE BEARING MOMENTS OF INERTIA

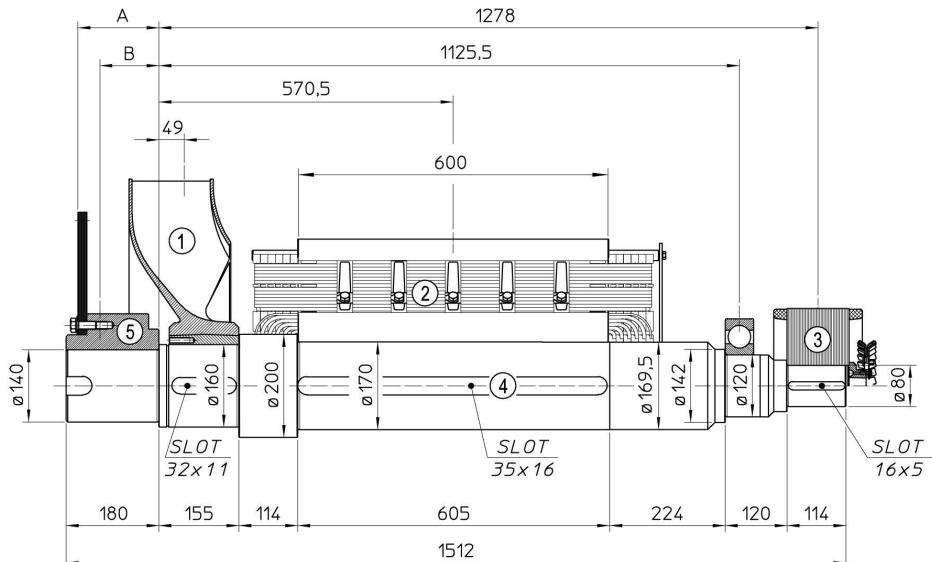

POS.	COMPONENT	WEIGHT (kg)	J (kgm ²)
1	FAN	42.4	2.2323
2	MAIN ROTOR	895.5	35.1154
3	EX. ROTOR	59.8	0.7260
4	SHAFT	229.3	0.7912
TOTAL		1227.0	38.8649

POS.	COMPONENT	SAE N°	A	B	WEIGHT (kg)	J (kgm ²)
5	SHAFTS COUPLING FLEX PLATE	18	172.7	113.4	82.9	1.8652
		21	157.0	114.6	93.8	3.2090

SINGLE BEARING DIMENSIONS

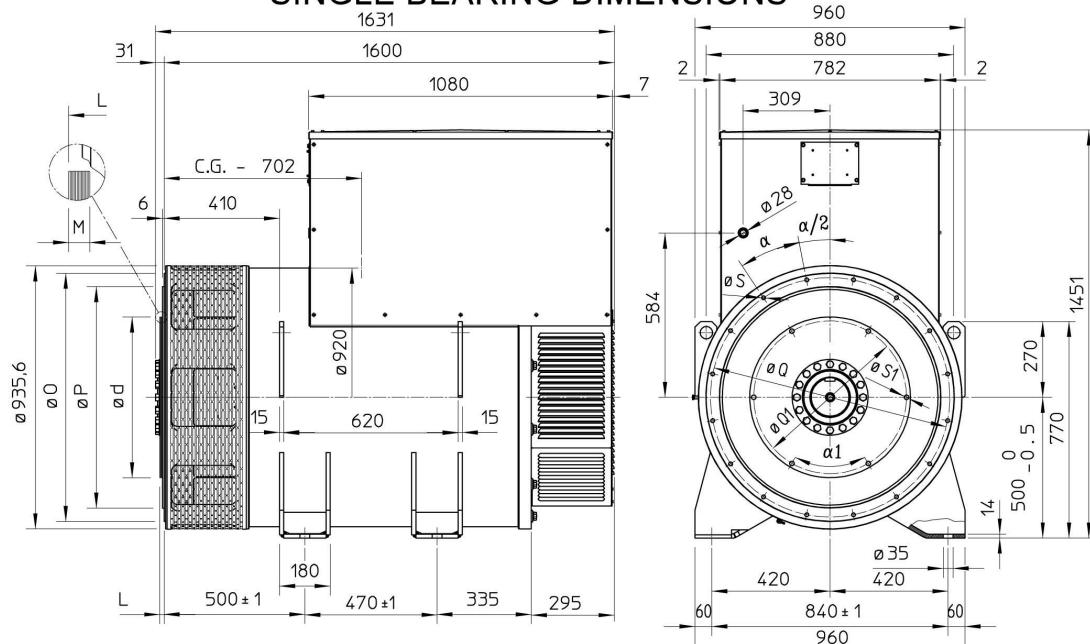


SAE N.	FLANGE/FLANGE BRIDE/FLANSCH				
	O	P	Q	S	α
00	883	787.4	850.9	14	22.5°
0	711	647.7	679.5	14	22.5°

SAE N.	GIUNTA DISCHI / DISC COUPLING DISQUE DE MONOPALIER / SCHEIBENKUPPLUNG					
	d	L	M	Q1	S1	$\alpha1$
18	571.5	15.7	15	542.92	16.5	60°
21	673.1	0	17	641.35	16.5	30°


C.G.= GRAVITY CENTER

ECO46 1L4 A

TWO BEARING MOMENTS OF INERTIA

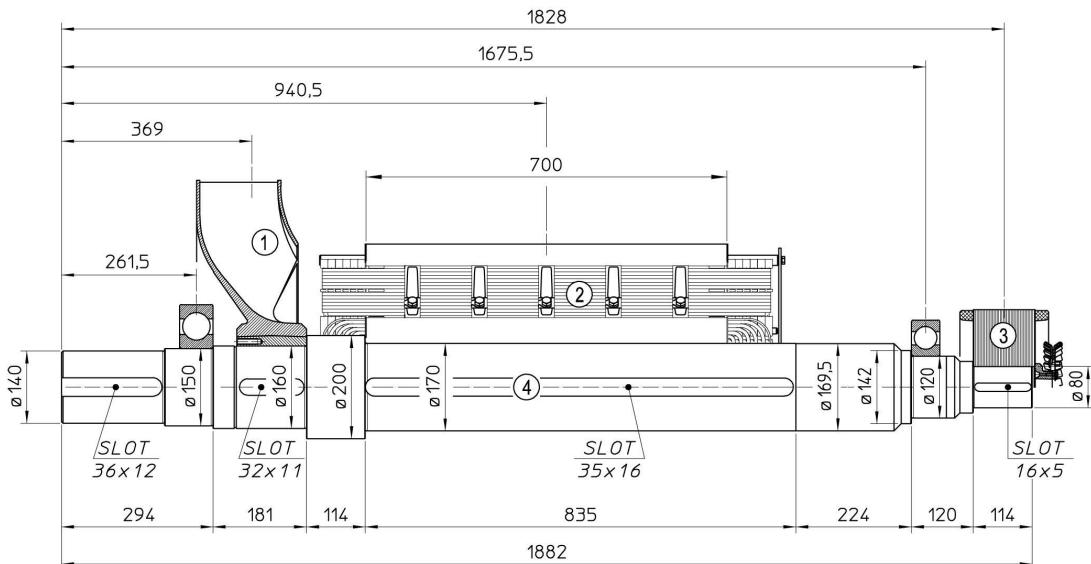


TWO BEARING DIMENSIONS

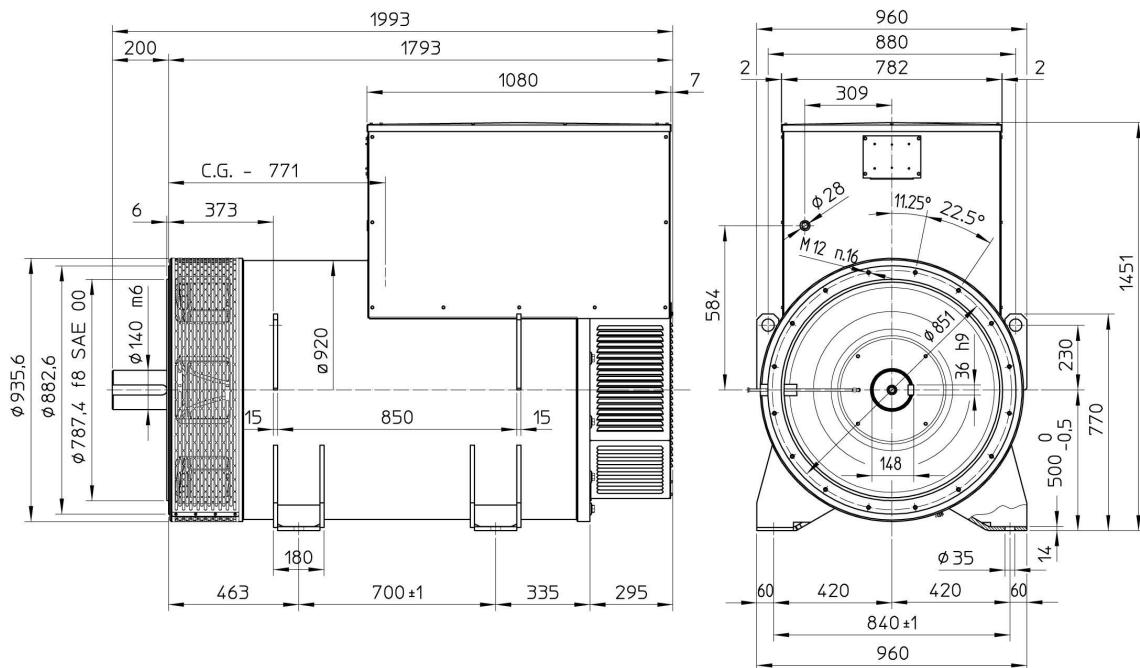

ECO46 1L4 A


SINGLE BEARING MOMENTS OF INERTIA

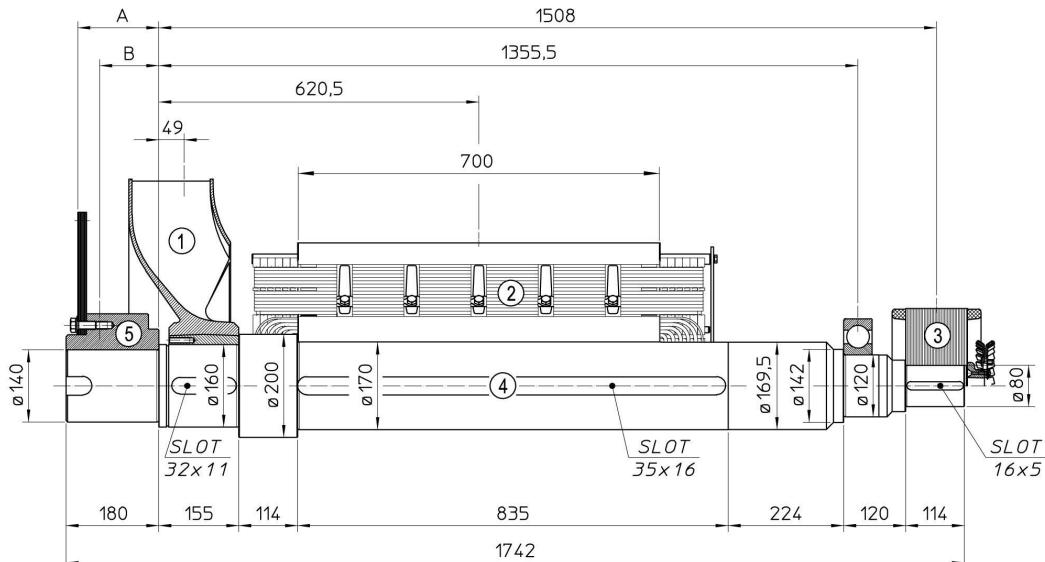

POS.	COMPONENT	WEIGHT (kg)	J (kgm ²)
1	FAN	42.4	2.2323
2	MAIN ROTOR	1024.7	40.0803
3	EX. ROTOR	59.8	0.7260
4	SHAFT	269.1	0.9324
TOTAL		1396.0	43.9710

POS.	COMPONENT	SAE N°	A	B	WEIGHT (kg)	J (kgm ²)
5	SHAFTS COUPLING FLEX PLATE	18	172.7	113.4	82.9	1.8652
		21	157.0	114.6	93.8	3.2090

SINGLE BEARING DIMENSIONS

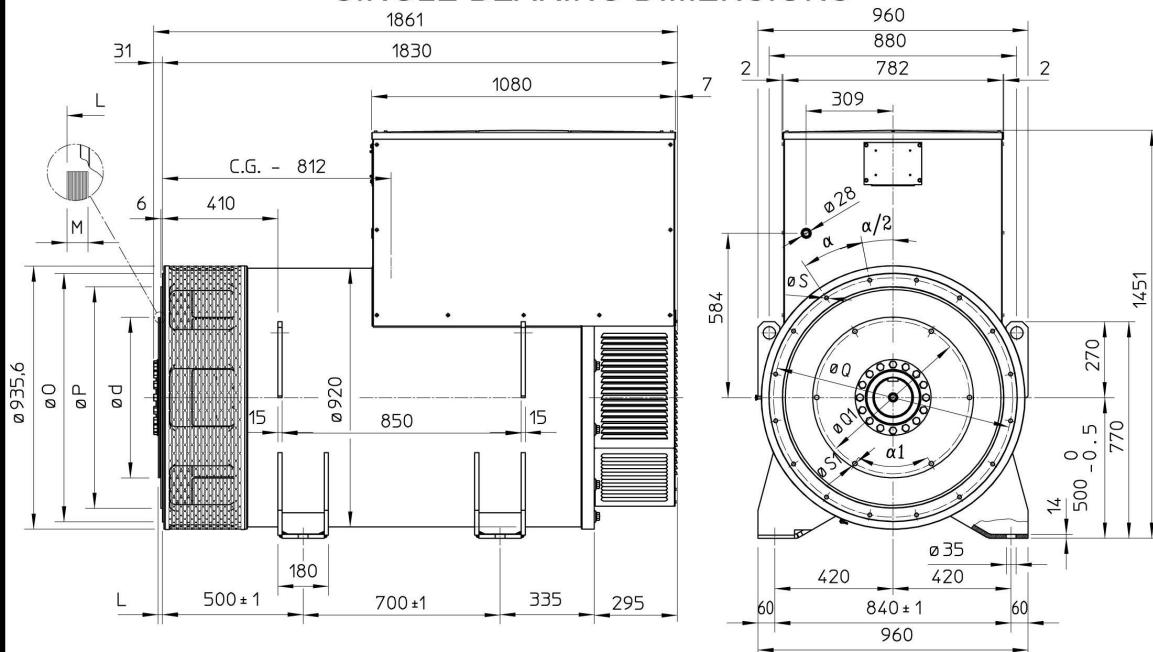


SAE N.	FLANGIA/FLANGE BRIDE/FLANSCH				
	O	P	Q	S	α
00	883	787.4	850.9	14	22.5°
0	711	647.7	679.5	14	22.5°

SAE N.	GIUNTA A DISCHI / DISC COUPLING DISQUE DE MONOPALIER / SCHEIBENKUPPLUNG					
	d	L	M	Q1	S1	α1
18	571.5	15.7	15	542.92	16.5	60°
21	673.1	0	17	641.35	16.5	30°


C.G.= GRAVITY CENTER

ECO46 1.5L4 A

TWO BEARING MOMENTS OF INERTIA

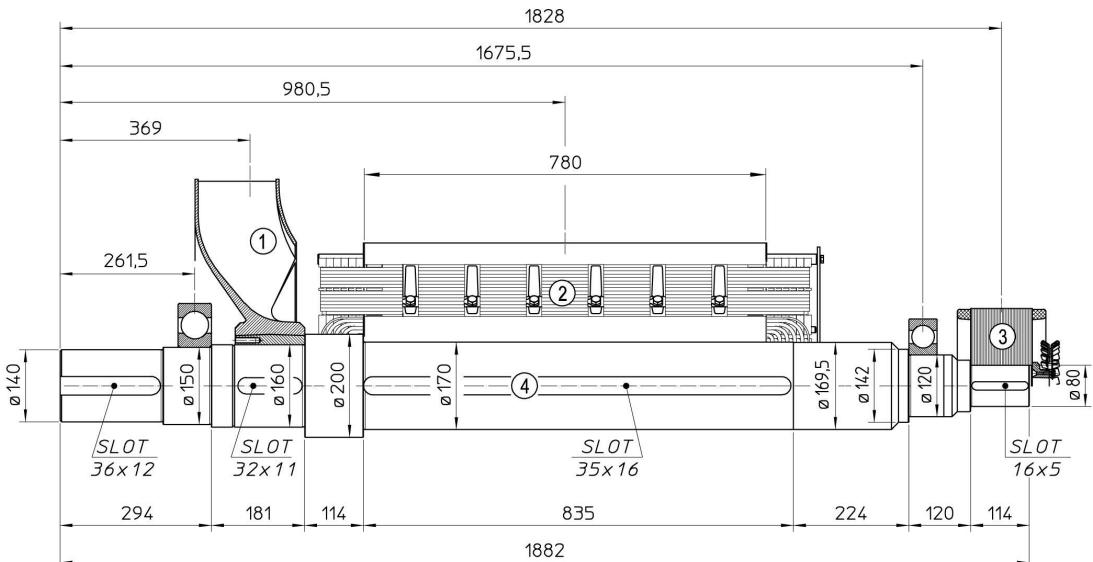


TWO BEARING DIMENSIONS

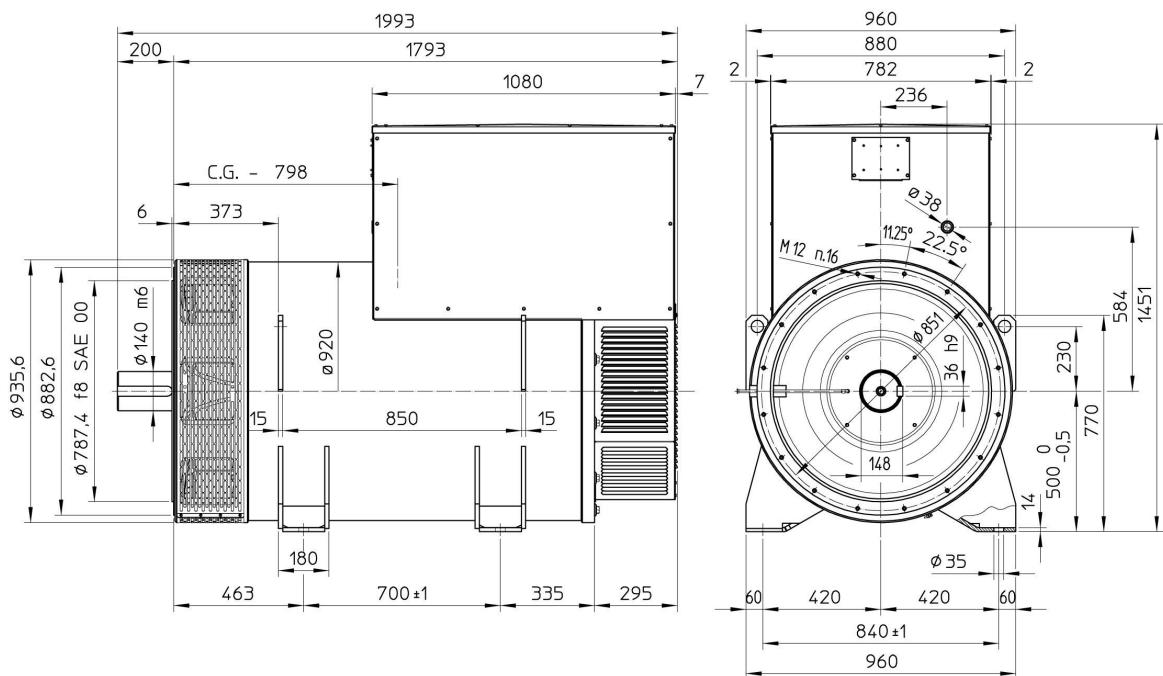


ECO46 1.5L4 A

SINGLE BEARING MOMENTS OF INERTIA

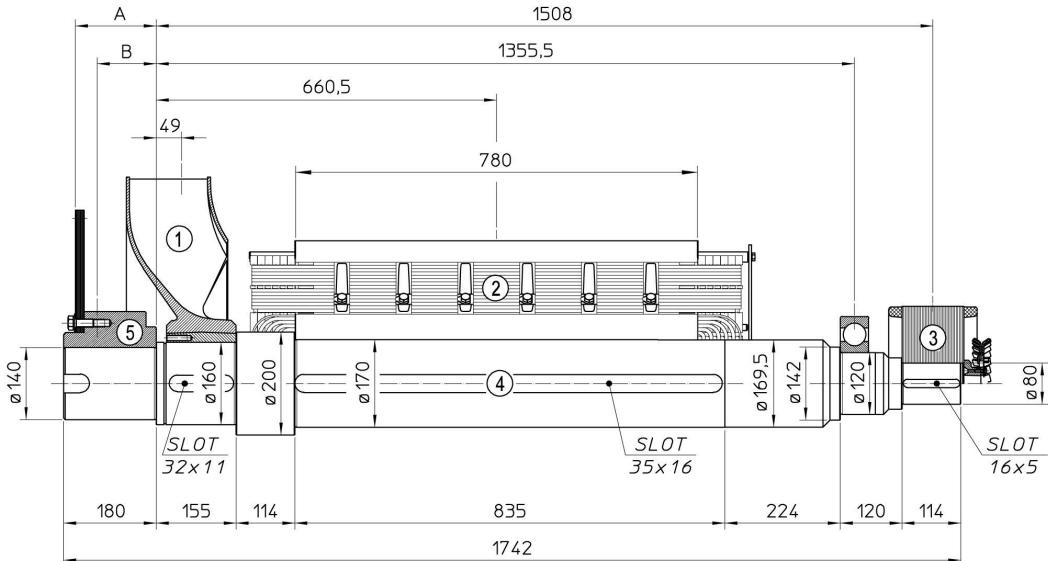


SINGLE BEARING DIMENSIONS

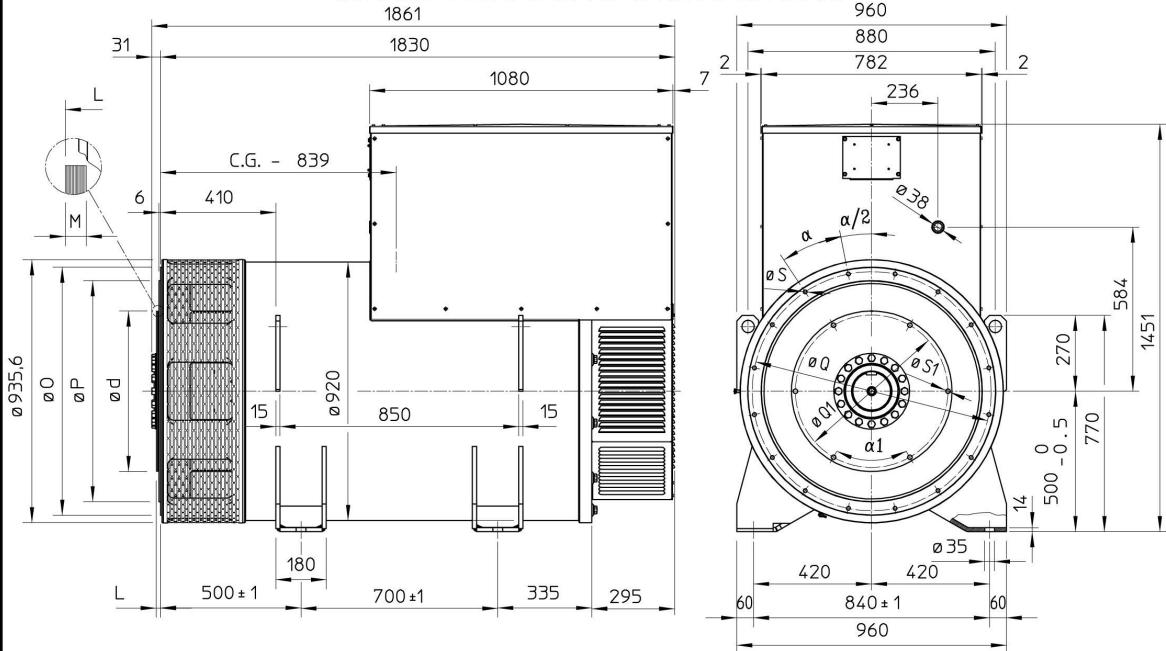

C.G.= GRAVITY CENTER


ECO46 2L4 A

TWO BEARING MOMENTS OF INERTIA

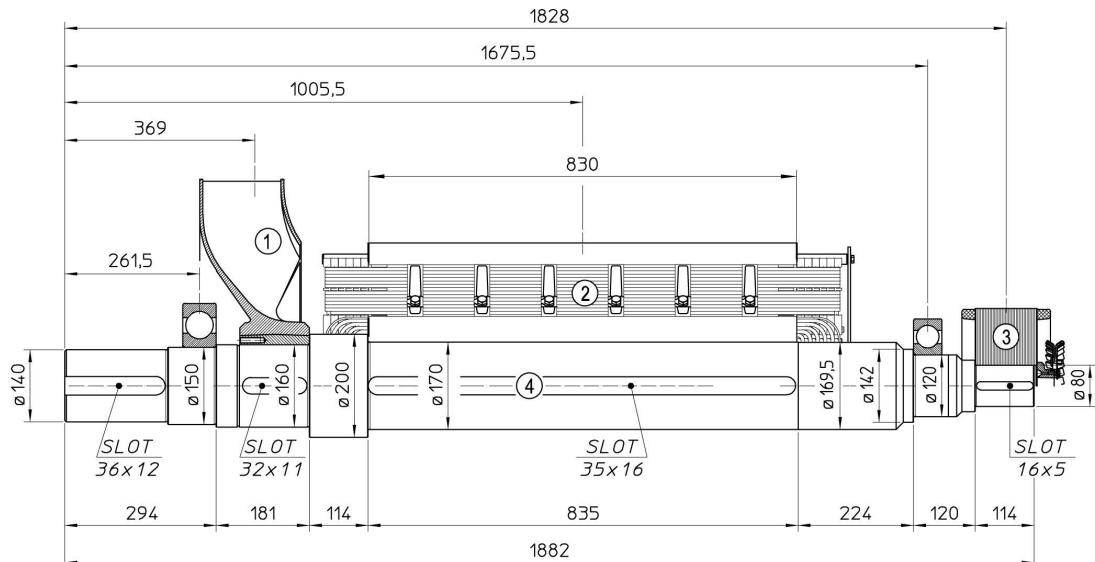

POS.	COMPONENT	WEIGHT (kg)	$J (\text{kgm}^2)$
1	FAN	42.4	2.2323
2	MAIN ROTOR	1210.0	47.1561
3	EX. ROTOR	59.8	0.7260
4	SHAFT	288.0	0.9857
TOTAL		1600.3	51.1001


TWO BEARING DIMENSIONS

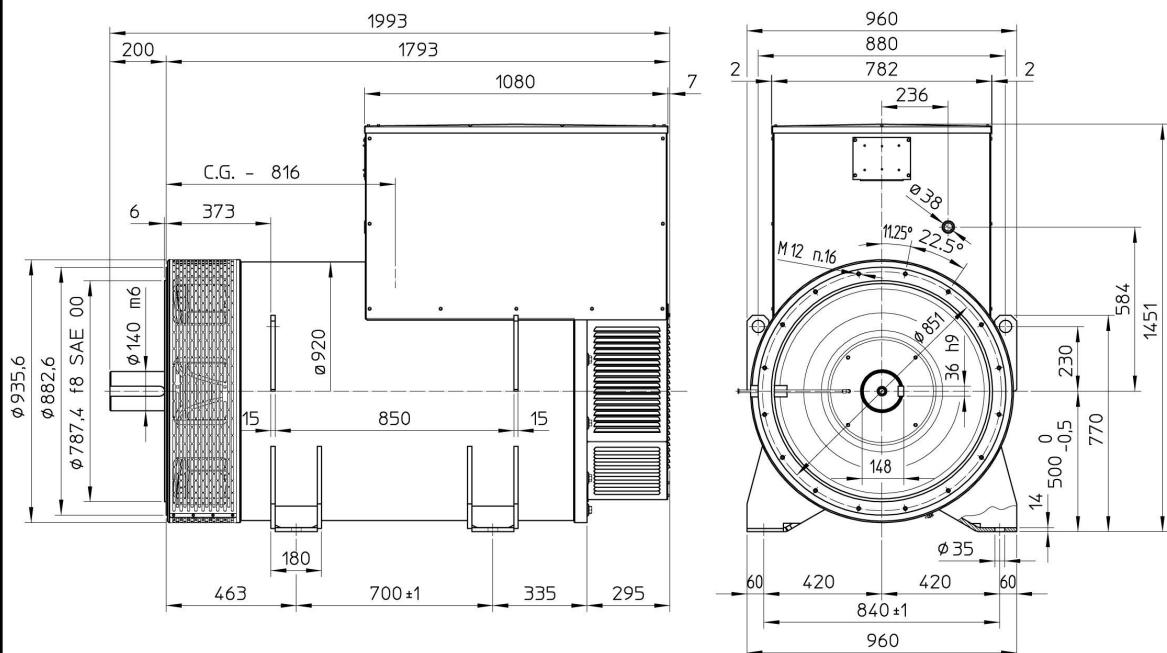


C.G.= GRAVITY CENTER

ECO46 2L4 A

SINGLE BEARING MOMENTS OF INERTIA

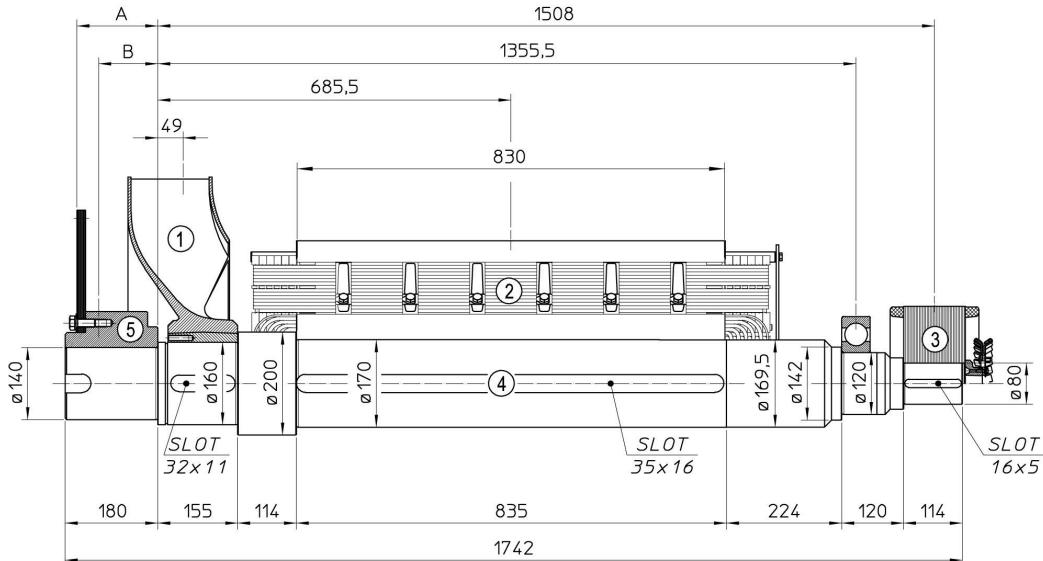


SINGLE BEARING DIMENSIONS

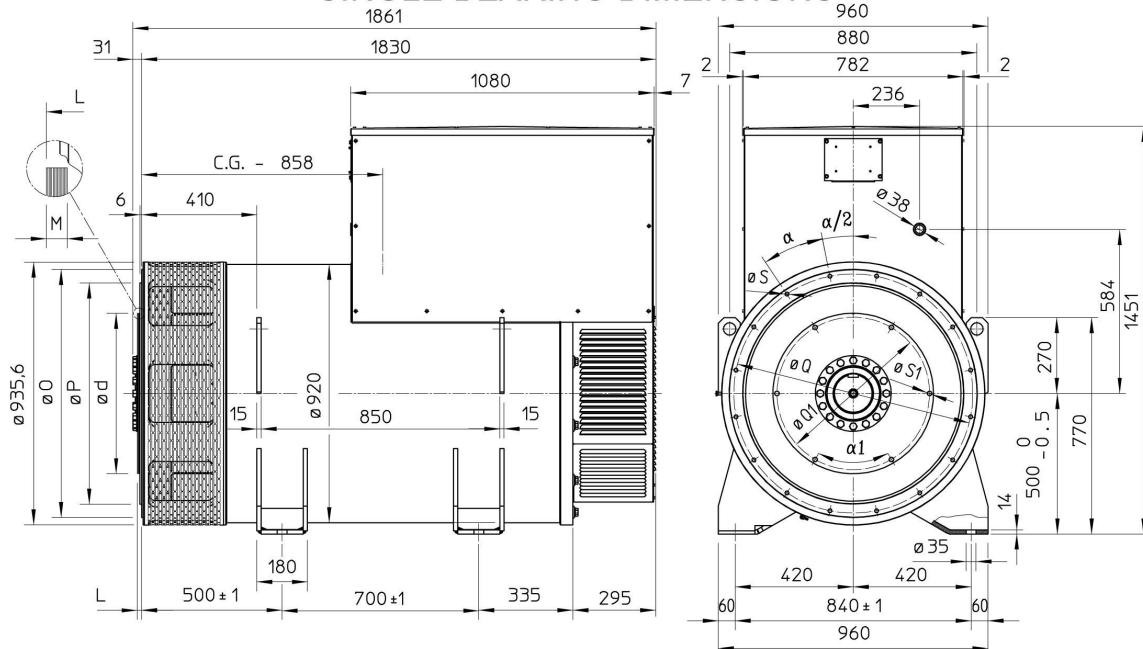

C.G.= GRAVITY CENTER


ECO46 VL4 A

TWO BEARING MOMENTS OF INERTIA

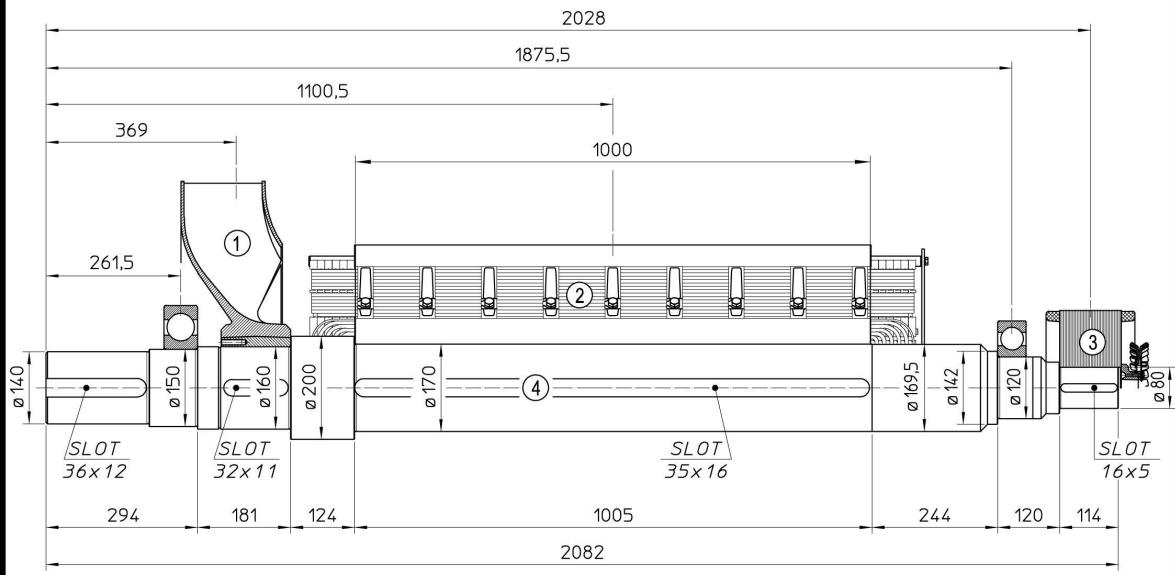



POS.	COMPONENT	WEIGHT (kg)	$J (\text{kgm}^2)$
1	FAN	42.4	2.2323
2	MAIN ROTOR	1443.7	56.3916
3	EX. ROTOR	59.8	0.7260
4	SHAFT	323.4	1.1150
TOTAL		1869.3	60.4649

TWO BEARING DIMENSIONS

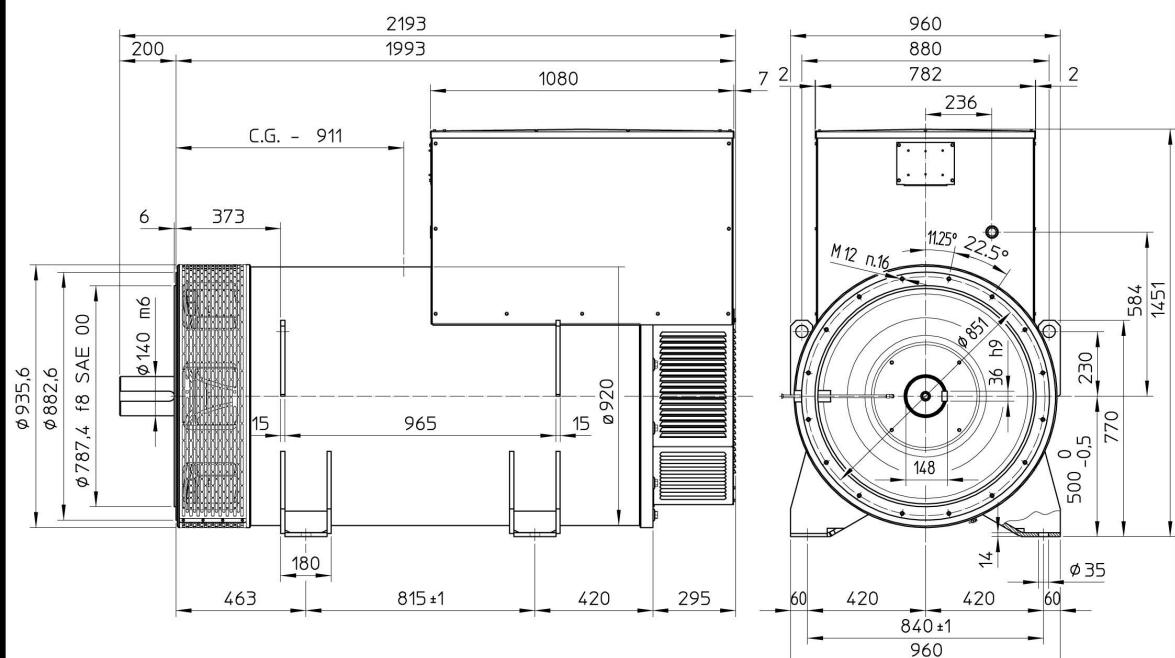

C.G.= GRAVITY CENTER

ECO46 VL4 A

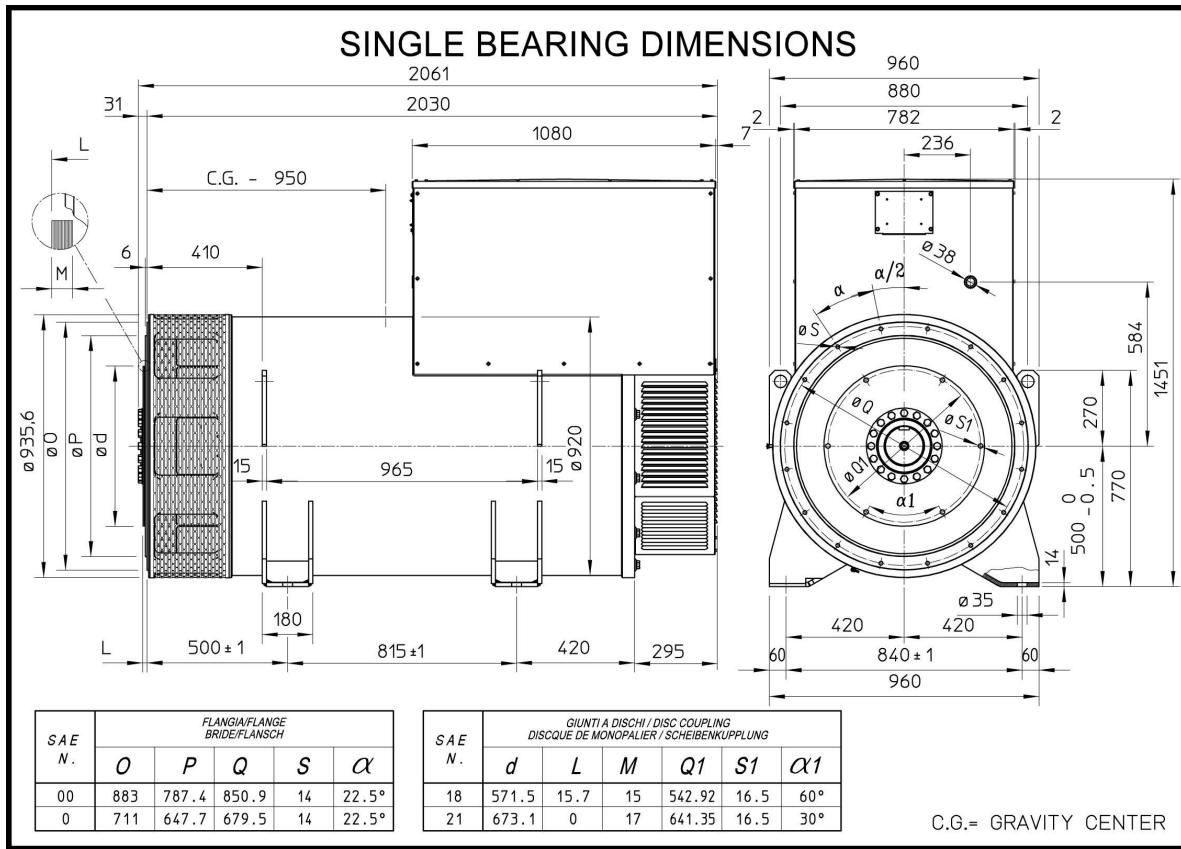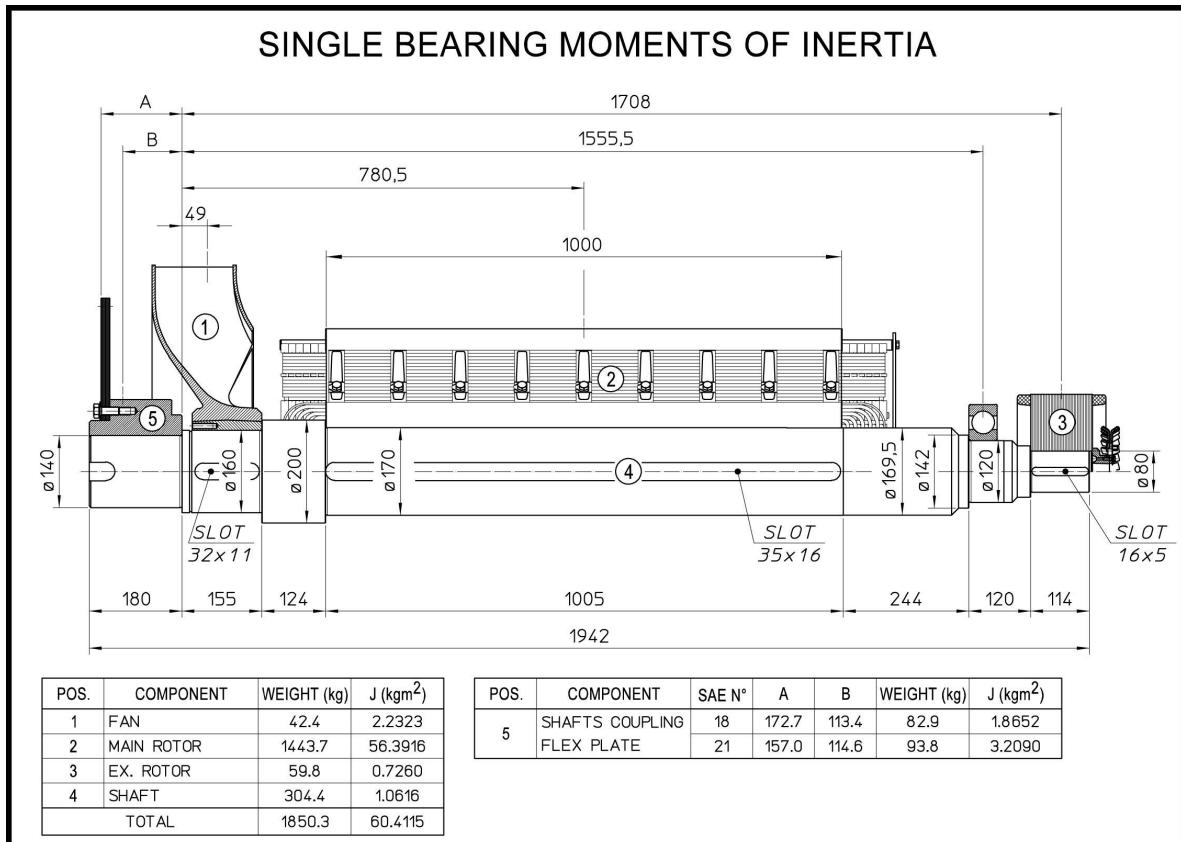

Notes

Mecc Alte SpA (HQ)

Via Roma
20 – 36051 Creazzo
Vicenza – ITALY
T: +39 0444 396111
E: info@meccalte.it
aftersales@meccalte.it

Mecc Alte Portable

Via Roma
20 – 36051 Creazzo
Vicenza – ITALY
T: +39 0444 396111
E: info@meccalte.it

Mecc Alte Power Products srl

Via Melaro
2 – 36075 Montecchio
Maggiore (VI) – ITALY
T: +39 0444 1831295
E: info@meccalte.it

Zanardi Alternatori srl

Via Dei Laghi
48/B – 36077 Altavilla
Vicenza – ITALY
T: +39 0444 370799
E: info@zanardialternatori.it

United Kingdom

Mecc Alte U.K. LTD
6 Lands' End Way
Oakham
Rutland LE15 6RF
T: +44 (0) 1572 771160
E: info@meccalte.co.uk

Spain

Mecc Alte España S.A.
C/ Rio Taibilla, 2
Polig. Ind. Los Valeros
03178 Benijofar (Alicante)
T: +34 (0) 96 6702152
E: info@meccalte.es

China

Mecc Alte Alternator Haimen LTD
755 Nanhai East Rd
Jiangsu HEDZ 226100 PRC
T: +86 (0) 513 82325758
E: info@meccalte.cn

India

Mecc Alte India PVT LTD
Plot NO:1, Sanaswadi
Talegaon
Dhamdhare Road Taluka:
Shirur, District:
Pune - 412208
Maharashtra, India
T: +91 2137 619600
E: info@meccalte.in

U.S.A. and Canada

Mecc Alte Inc.
1229 Adams Drive
McHenry, IL, 60051
T: +1 815 344 0530
E: info@meccalte.us

Germany

Mecc Alte Generatoren GmbH
Bucher Hang 2
D-87448 Waltenhofen
T: +49 (0)831 540755 0
E: info@meccalte.de

Australia

Mecc Alte Alternators PTY LTD
10 Duncan Road, PO Box 1046
Dry Creek, 5094, South
Australia
T: +61 (0) 8 8349 8422
E: info@meccalte.com.au

France

Mecc Alte International S.A.
Z.E.La Gagnerie
16330 ST.Amant de Boixe
T: +33 (0) 545 397562
E: info@meccalte.fr

Far East

Mecc Alte (F.E.) PTE LTD
19 Kian Teck Drive
Singapore 628836
T: +65 62 657122
E: info@meccalte.com.sg



www.meccalte.com