



Totally Focused. Totally Independent.

Technical Specification

NPE32 4 C



The world's largest  
independent producer of  
alternators 1 – 5,000kVA

**All electrical and mechanical data contained in this document is provided for reference only and represents typical values under optimal operating conditions. Actual performances may be subjected to cumulative tolerances or variances due to materials, construction or other specific operating and loading conditions, in accordance with IEC 60034.**

**Mecc Alte S.p.A. reserves the right to change specifications without notice. The information contained in this document does not constitute a guarantee of performance for any specific application. For specific technical information, please contact your local Mecc Alte office.**

**This document is the property of Mecc Alte S.p.A. – All rights reserved. Reproduction, distribution, or transmission of this publication, in whole or in part, is prohibited without prior written consent.**

## Regulations and Certifications

The alternators are designed, built and tested in accordance with **ISO 9001**, within a certified quality management system. The entire range meets the most common international specifications, including:

- ▶ CEI 2-3, IEC 34-1, EN 60034-1, VDE 0530
- ▶ BS 4999-5000, NF 51.111, NEMA MG 1-2011
- ▶ ISO 8528-3

In addition, they comply with specific regulations for particular markets, such as:

- ▶ UL 1446, UL 1004-4, UL 1004-B
- ▶ CAN/CSA-C22.2 No14-95 / No100-95

The ECP and ECO series comply with EEC directives **2006/42/EC (Machinery Directive)**, **2014/35/EC (Low Voltage Directive)**, **2014/30/EC (Electromagnetic Compatibility Directive)**, **2011/65/EC (RoHS 2)** and **2015/863 (RoHS 3)**.

## Windings and performance

All alternators are equipped with **reduced pitch windings (2/3)**. This configuration allows:

- ▶ The elimination of triple harmonics in the voltage waveform
- ▶ Reduction of neutral currents in parallel operation

All models, except the **ECP3 series**, are equipped with an aluminum or copper **cushioning cage** to ensure greater stability during load transients.

- ▶ 12 reconnectable wires:
  - 50 Hz - from 380 V to 440 V and from 220/110 V to 240/120 V (with possible derating)
  - 60 Hz - from 380 V to 480 V and from 220/110 V to 240/120 V (with possible derating)
- ▶ 6 reconnectable wires:
  - 50 Hz - from 380 V to 440 V and from 220 V to 240 V (with possible derating)
  - 60 Hz - from 380 V to 480 V and from 220 V to 240 V (with possible derating)

Winding configurations	Standard		Special (dedicated)			
	12 reconnectable wires	6 reconnectable wires	380 V and 600 V 60 Hz	690V 50/60Hz	220-240V 1ph 50Hz	220-240V 1ph 60Hz
ECP3 to ECO38 & (NPE)	●	○	○	○	○	○
ECO40 to ECO46	○	●	○	○	○ *	○ *
ECO47	● 4 wires		○	○	-	-
THD (Total Harmonic Distortion)	Typically <3.5% at full load L-L	Typically <3.0% at full load L-L	Typically <3.5% at full load L-L	Typically <3.5% at full load L-L	Typically <4.5% at full load L-N	Typically <4.5% at full load L-N
Interference suppression	VDE 0875 G/N/K, EN61000-6-3, EN61000-6-2, others available on request					

\* Only up to ECO40 series      ● Standard      ○ Optional

## Insulating Materials and Electrical Performance

- ▶ **Insulation Class:** H on the entire range
- ▶ **Efficiency:** High efficiency as standard
- ▶ **Motor Start:** Inrush current >300% for 20 seconds
- ▶ **THD (Total Harmonic Distortion):**
  - <3.5% L-L typical (three-phase windings)
  - <4.5% L-N typical (single-phase windings)

## Winding protection

Winding protection is crucial to ensure the longevity of the generator based on environmental conditions and electrical stress.

Protection Level	Standard	Standard+	Grey	Grey+	Total+	V-Type
Treated Components	Active parts	Exciter stator	Main stator + exciter	Stator princ. + Exciter	Stator princ. + Exciter + Rotor	Complete system
Type of Treatment	Impregnation resin only	Resin + Grey paint EG43	Grey paint EG43	Stator (EG43) + Exciter (Black severe ep.)	Black protection (stators) + EG43 (rotating parts)	Double VPI, Anti-Corona Wire, Double Layer Black
Series/Typical Application	ECP3, ECP4 (Standard Use)	ECP28, 30, 32	Marine Applications / NPE, ECO, HCP	Harsh industrial environments	Extreme/abusive conditions	Harsh Environments (Extended Warranty)

Detail of specific treatments

- ▶ **Grey paint EG43:** Standard protection against moisture and contaminants.
- ▶ **Black Protection:** Advanced physical barrier against chemicals and high humidity.
- ▶ **V-Type Treatment:** Includes vacuum impregnation (VPI), internal stator insulation, and corona-resistant materials for maximum reliability.


For more information visit: [Insulation\\_System\\_Guide](#)

## Construction

The robust mechanical structure withstands up to 5G in any direction and 9G vertically, and its design allows easy access to connections and components during routine maintenance checks. The mechanical design used the most advanced FEM techniques. The materials used are: DD12 steel for the frame, C45 steel for the shaft and cast iron or die-cast aluminum for the end brackets: the fans are made of die-cast aluminum and nylon reinforced with fiberglass, UL compliant materials. The rotors are dynamically balanced according to ISO 1940-1 grades 6.3 (up to series 32) or 2.5 (series 34 onwards).

## Terminals and terminal blocks

Easy access to the regulators is ensured by a pull-out drawer or drop-down panel to allow for safer adjustment. Large terminal blocks allow easy access of power cables, in the higher power ranges ECO43 and ECO46 terminals allow convenient choice of power cable or busbar connection with input and connection versatility. Current transformers are available as an option on the ECO 40, 43, 46 and 47 series with single or dual output.

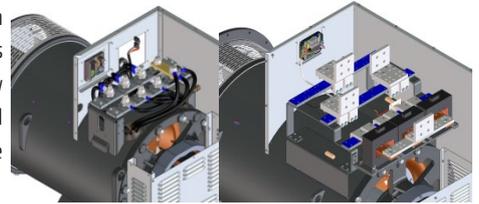

A new AVR panel has been installed on the Type-C family. The terminal blocks have been redesigned in a special "L" configuration, specifically to facilitate connections with customers; With this type of terminal block, a second terminal block can be positioned in order to obtain 12 terminals available. Current transformers are available as an option on the ECO38 series with single or dual output.



## Protection for the environment

In addition to the protection on the windings themselves, alternators can have a higher degree of protection. The standard level is IP23 but the following solutions are also available: IP23 DP with ingress filters, IP23 with terminal box only in IP45, IP43 and IP45. Downgrades may apply. For more information visit: [Bulletin\\_IP](#)




## Optional PMG

The MeccAlte PMG is optionally available factory-fitted on ECP28, ECP30, ECP32, ECP34 and ECO38; Alternatively, only the preparation for future mounting is optional.




On the ECO 40, 43 and 46 series it is optionally available factory-fitted or retrofitted. On the ECO47 the PMG is standard.

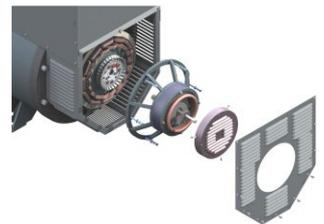

The entire AVR range is fully compatible with MAUX and PMG systems, minimizing spare parts management and inventory flexibility, as one AVR adapts to all applications. The PMG delivers the same amount of kVA as the MAUX.

## Anti-condensation heater

Our entire range can be equipped with anti-condensation heaters of adequate power and sized to the alternator. The voltage for heaters must be specified when ordering. New cylindrical cartridge heaters are available on request and can be retrofitted.

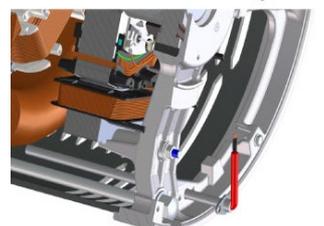

## Accessories

Additional optional can be mounted on our alternator series, such as PTC or PT100 thermistors on both windings and bearings, anti-condensation heaters, high and low profile terminal blocks (on most series), parallel devices, current and voltage transformers, air filters, IP43 and IP45 protections and many more. For more information visit: [C-type-accessories](#)

## Excitation and regulation systems

All ECP/ECO series are equipped with MAUX auxiliary winding to power the digital controller.

### DxR

Both the DSR and DER1 are available for PC connection via the DxR2 USB interface and DxR TERMINAL software to query/download alarms and settings for analysis or for cloning other controllers. DER2 has a built-in USB connection and can be connected to your PC without any optional connection card. Through the DxR connection, other settings such as LAMS, synchronous external control based on digital RAM, and soft start can be achieved. Simple analog potentiometers are available for the most common adjustments.

### MxK

The digital controllers of the MxK series (M2K, M2Ks, M3K, M3Ks, M3KSHD) are configurable via the MeccAlte App for PC or mobile devices, using the USB2MxK (USB) or MxKconnect (Wi-Fi) accessories. The M3KSHD model integrates a USB port for direct connection to the PC, without the need for optional cards. The M2Ks, M3Ks and M3KSHD models also support CAN Bus communication (SAE J-1939) for integration with MeccAlte GC controllers. Software-accessible features include LAMS, external voltage control ( $\pm 10V$ ), soft start, and PID autotuning. The controller records up to 64 alarms in E2PROM memory and provides the current status via A ALARMS address. There are analog potentiometers for VOLT, STAB, AMP, and DROOP (the latter on M3K, M3Ks, and M3KSHD models only). The M3KSHD includes High Dynamic Response (HDR) for a quick rush of excitement. All MxK regulators are equipped with protections against over/under excitation, overcurrent, V/f, short circuit and power overvoltage.

Regulator	M2K	M2Ks	M3K	M3Ks	M3KsHD	DSR	DER1	DER2
ECP3 to ECO38 & (NPE)	●	○	○	○	○	○	○	○
ECO40 to ECO46	○	○	●	○	○	○	○	○
ECO47	○	○	○	○	●	○	○	○
Parallel operation	-	√	√	√	√	√	√	√
Network Parallel	-	√	√	√	√	√	√	√
Reference 3 phase (rms)	-	-	√	√	√	-	√	√
Accuracy	+/-1%	+/-0.5%	+/-0.5%	+/-0.5%	+/-0.5%	+/-1%	+/-0.5%	+/-0.5%
Remote voltage control	√	√	√	√	√	√	√	√
Alarm log	√	√	√	√	√	√	√	√
Analog and digital configurable	√	√	√	√	√	√	√	√
LAMS (Load Acceptance V/f)	√	√	√	√	√	√	√	√
APO (Active Protection Output)	-	-	-	-	√	√	√	√
Soft start	√	√	√	√	√	√	√	√
High Dynamic Response	-	-	-	-	√	-	-	√
USB connection without external cards	-	-	-	-	√	-	-	√

● Standard    ○ Optional    √ Available

## Derating coefficients

Altitude (meters)	Ambient temperature (Celsius)							
	25	40	45	50	55	60	65	70
$\leq 1000$	1.07	1	0.96	0.93	0.91	0.89	0.85	0.82
$> 1000 \leq 1500$	1.01	0.96	0.92	0.89	0.87	0.84	0.81	0.77
$> 1500 \leq 2000$	0.96	0.91	0.87	0.84	0.83	0.79	0.77	0.73
$> 2000 \leq 3000$	0.90	0.85	0.81	0.78	0.76	0.73	0.71	0.68
$> 3000 \leq 4000$	0.84	0.78	0.75	0.73	0.70	0.68	0.66	0.62
$> 4000 \leq 5000$	0.78	0.72	0.69	0.67	0.65	0.62	0.59	0.56
$> 5000 \leq 6000$	0.70	0.65	0.63	0.61	0.58	0.55	0.53	0.50

## Notes on short-circuit curves

The coefficients indicated must be used to correct the values of the three-phase short-circuit curves as a function of the nominal voltage.

The indicated coefficient must be used to correct the values of the three-phase short-circuit curves as a function of the type of short-circuit voltage.

50 Hz		60 Hz			3 Steps	2 L-L phases	1 L-N phase
Voltage	Factor	Voltage	Factor				
380	0.93x	415	0.85x	Instant	1x	0.87x	1.30x
400	1x	440	0.90x	Minimum	1x	1.80x	3.20x
415	1.04x	460	0.95x	Supported	1x	1.50x	2.50x
440	1.10x	480	1x	Maximum duration	20 s	10 s	4 s

All curves are shown for star connection in series or parallel at 400V 50 Hz or 480V 60 Hz. If the unit is reconnected from series to star parallel, the additional coefficient is 2x. From the star series to the delta series, it is 1.72x. From star in series to parallel triangle, it is 3.44x.

A smaller generator can be selected for a given engine starting service, as it has lower subtransient reactance values for nonlinear loads. The entire range from 6.5 to 3400 kVA is capable of delivering a sustained short-circuit current of >300% for up to 20 seconds.

## MeccAlte Tools

This section provides direct access to professional tools developed to support alternator selection, sizing and configuration. These tools ensure solutions that are aligned with the electrical and mechanical requirements of each project.

### Key features

With a data-driven approach, you can optimize performance and reduce scaling risks:

- ▶ **Targeted Selection:** Identify the ideal alternator based on load profiles and operating conditions.
- ▶ **Power Calculations:** performs the sizing of the engine and alternator respecting the electrical constraints.
- ▶ **Parameter Verification:** Controls engine starting capability and handling of unbalanced and distorted loads.
- ▶ **PMG Configuration:** Configure permanent magnet alternators for AC/DC outputs or battery chargers.

For more information visit: [MeccAlte Tools](#)

## General characteristics

Pole number	4	Insulation class	H
Phase number	3	Protection class	IP23
Number of wires	12	NDE Bearing type	6305-2RS1 C3
Execution	Brushless	DE Bearing type	-
Regulator type	M2K	Maximum Overspeed	2250
Winding pitch	2/3	Altitude	0-1000
Code voltage reference	T0405S3	Balancing	ISO1940-1

## Ratings 50Hz

kVA / kW @ Temp. Rise / Ambient °C - 0.8 PF		STANDBY-163/27				STANDBY-150/40				H-125/40				F-105/40				B-80/40			
Series	Star Y	380V	400V	415V	440V	380V	400V	415V	440V	380V	400V	415V	440V	380V	400V	415V	440V	380V	400V	415V	440V
	Parallel Star YY	190V	200V	208V	220V	190V	200V	208V	220V	190V	200V	208V	220V	190V	200V	208V	220V	190V	200V	208V	220V
	Series Delta Δ	220V	230V	240V	254V	220V	230V	240V	254V	220V	230V	240V	254V	220V	230V	240V	254V	220V	230V	240V	254V
	Parallel Delta ΔΔ	110V	115V	120V	127V	110V	115V	120V	127V	110V	115V	120V	127V	110V	115V	120V	127V	110V	115V	120V	127V
<b>NPE32 1S4 C</b>	<b>kVA</b>	8,8	<b>8,8</b>	8,8	7	8,3	<b>8,3</b>	8,3	6,8	8	<b>8</b>	8	6,4	7,8	<b>7,8</b>	7,8	6,2	6,4	<b>6,4</b>	6,4	5,1
	<b>kW</b>	7	<b>7</b>	7	5,6	6,6	<b>6,6</b>	6,6	5,4	6,4	<b>6,4</b>	6,4	5,1	6,2	<b>6,2</b>	6,2	5	5,1	<b>5,1</b>	5,1	4,1
<b>NPE32 2S4 C</b>	<b>kVA</b>	12,1	<b>12,1</b>	12,1	9,7	11,6	<b>11,6</b>	11,6	9,3	11	<b>11</b>	11	8,8	10	<b>10</b>	10	8	8,8	<b>8,8</b>	8,8	7
	<b>kW</b>	9,7	<b>9,7</b>	9,7	7,8	9,3	<b>9,3</b>	9,3	7,4	8,8	<b>8,8</b>	8,8	7	8	<b>8</b>	8	6,4	7	<b>7</b>	7	5,6
<b>NPE32 1M4 C</b>	<b>kVA</b>	17,6	<b>17,6</b>	17,6	13,5	16,7	<b>16,7</b>	16,7	13,1	16	<b>16</b>	16	12,3	14,8	<b>14,8</b>	14,8	11,8	12,8	<b>12,8</b>	12,8	9,8
	<b>kW</b>	14,1	<b>14,1</b>	14,1	10,8	13,4	<b>13,4</b>	13,4	10,5	12,8	<b>12,8</b>	12,8	9,8	11,8	<b>11,8</b>	11,8	9,4	10,2	<b>10,2</b>	10,2	7,8
<b>NPE32 2M4 C</b>	<b>kVA</b>	22	<b>22</b>	22	18,2	20,9	<b>20,9</b>	20,9	16,7	20	<b>20</b>	20	16,5	18,2	<b>18,2</b>	18,2	14,6	16	<b>16</b>	16	13,2
	<b>kW</b>	17,6	<b>17,6</b>	17,6	14,6	16,7	<b>16,7</b>	16,7	13,4	16	<b>16</b>	16	13,2	14,6	<b>14,6</b>	14,6	11,7	12,8	<b>12,8</b>	12,8	10,6
<b>NPE32 L4 C</b>	<b>kVA</b>	27,5	<b>27,5</b>	27,5	22	26,2	<b>26,2</b>	26,2	21,3	25	<b>25</b>	25	20	23	<b>23</b>	23	18	20	<b>20</b>	20	16
	<b>kW</b>	22	<b>22</b>	22	17,6	21	<b>21</b>	21	17	20	<b>20</b>	20	16	18,4	<b>18,4</b>	18,4	14,4	16	<b>16</b>	16	12,8
<b>NPE32 VL4 C</b>	<b>kVA</b>	38,5	<b>38,5</b>	38,5	30,8	36,4	<b>36,4</b>	36,4	29,6	35	<b>35</b>	35	28	31,8	<b>31,8</b>	31,8	25,5	28	<b>28</b>	28	22,4
	<b>kW</b>	30,8	<b>30,8</b>	30,8	24,6	29,1	<b>29,1</b>	29,1	23,7	28	<b>28</b>	28	22,4	25,4	<b>25,4</b>	25,4	20,4	22,4	<b>22,4</b>	22,4	17,9

## Ratings 60Hz

kVA / kW @ Temp. Rise / Ambient °C - 0.8 PF		STANDBY-163/27				STANDBY-150/40				H-125/40				F-105/40				B-80/40			
Series	Star Y	415V	440V	460V	480V	415V	440V	460V	480V	415V	440V	460V	480V	415V	440V	460V	480V	415V	440V	460V	480V
	Parallel Star YY	208V	220V	230V	240V	208V	220V	230V	240V	208V	220V	230V	240V	208V	220V	230V	240V	208V	220V	230V	240V
	Series Delta Δ	240V	254V	265V	277V	240V	254V	265V	277V	240V	254V	265V	277V	240V	254V	265V	277V	240V	254V	265V	277V
	Parallel Delta ΔΔ	120V	127V	133V	138V	120V	127V	133V	138V	120V	127V	133V	138V	120V	127V	133V	138V	120V	127V	133V	138V
<b>NPE32 1S4 C</b>	<b>kVA</b>	8,6	11	11	<b>11</b>	8,4	10,6	10,6	<b>10,6</b>	8	10	10	<b>10</b>	7	9,3	9,3	<b>9,3</b>	6,2	8	8	<b>8</b>
	<b>kW</b>	6,9	8,8	8,8	<b>8,8</b>	6,7	8,5	8,5	<b>8,5</b>	6,4	8	8	<b>8</b>	5,6	7,4	7,4	<b>7,4</b>	5	6,4	6,4	<b>6,4</b>
<b>NPE32 2S4 C</b>	<b>kVA</b>	12,1	14,3	14,3	<b>14,3</b>	11,6	13,8	13,8	<b>13,8</b>	11	13	13	<b>13</b>	10,1	11,6	11,6	<b>11,6</b>	8,8	10,4	10,4	<b>10,4</b>
	<b>kW</b>	9,7	11,4	11,4	<b>11,4</b>	9,3	11	11	<b>11</b>	8,8	10,4	10,4	<b>10,4</b>	8,1	9,3	9,3	<b>9,3</b>	7	8,3	8,3	<b>8,3</b>
<b>NPE32 1M4 C</b>	<b>kVA</b>	16,9	20,9	20,9	<b>20,9</b>	16,7	19,9	19,9	<b>19,9</b>	15,4	19	19	<b>19</b>	14,2	17,2	17,2	<b>17,2</b>	12,3	15,2	15,2	<b>15,2</b>
	<b>kW</b>	13,5	16,7	16,7	<b>16,7</b>	13,4	15,9	15,9	<b>15,9</b>	12,3	15,2	15,2	<b>15,2</b>	11,4	13,8	13,8	<b>13,8</b>	9,8	12,2	12,2	<b>12,2</b>
<b>NPE32 2M4 C</b>	<b>kVA</b>	22,7	26,4	26,4	<b>26,4</b>	21,1	24,9	24,9	<b>24,9</b>	20,6	24	24	<b>24</b>	19,5	21,7	21,7	<b>21,7</b>	16,5	19,2	19,2	<b>19,2</b>
	<b>kW</b>	18,2	21,1	21,1	<b>21,1</b>	16,9	19,9	19,9	<b>19,9</b>	16,5	19,2	19,2	<b>19,2</b>	15,6	17,4	17,4	<b>17,4</b>	13,2	15,4	15,4	<b>15,4</b>
<b>NPE32 L4 C</b>	<b>kVA</b>	28,6	34,1	34,1	<b>34,1</b>	27,2	32,5	32,5	<b>32,5</b>	26	31	31	<b>31</b>	24	28,5	28,5	<b>28,5</b>	20,8	24,8	24,8	<b>24,8</b>
	<b>kW</b>	22,9	27,3	27,3	<b>27,3</b>	21,8	26	26	<b>26</b>	21	24,8	24,8	<b>24,8</b>	19,2	22,8	22,8	<b>22,8</b>	16,6	19,8	19,8	<b>19,8</b>
<b>NPE32 VL4 C</b>	<b>kVA</b>	39,4	46,2	46,2	<b>46,2</b>	37,1	43,7	43,7	<b>43,7</b>	35,8	42	42	<b>42</b>	33,3	38,3	38,3	<b>38,3</b>	28,6	33,6	33,6	<b>33,6</b>
	<b>kW</b>	31,5	37	37	<b>37</b>	29,7	35	35	<b>35</b>	28,6	33,6	33,6	<b>33,6</b>	26,6	30,6	30,6	<b>30,6</b>	22,9	26,9	26,9	<b>26,9</b>

## Reactance &amp; Time constants- Class H / 400V

Unsaturated (ref. EN60034-4)			NPE32 1S4 C	NPE32 2S4 C	NPE32 1M4 C	NPE32 2M4 C	NPE32 L4 C	NPE32 VL4 C
<b>X<sub>d</sub></b>	Direct-axis synchronous reactance	%	418,9	387,9	374,7	389	448,6	402,8
<b>X'<sub>d</sub></b>	Direct-axis transient reactance	%	20,6	19,1	18,4	19,1	22	19,8
<b>X''<sub>d</sub></b>	Direct-axis subtransient reactance	%	14,7	13,6	13,1	13,7	15,8	14
<b>X<sub>q</sub></b>	Quadrature-axis synchronous reactance	%	134,5	124,5	120,5	125,1	143,9	129,5
<b>X'<sub>q</sub></b>	Quadrature-axis transient reactance	%	134,5	124,5	120,5	125,1	143,9	129,5
<b>X''<sub>q</sub></b>	Quadrature-axis subtransient reactance	%	44,9	41,6	40,2	41,7	48,1	43,2
<b>X<sub>2</sub></b>	Negative-sequence reactance	%	29,2	27	26,1	27,1	31,3	28
<b>X<sub>0</sub></b>	Zero sequence reactance	%	3,83	3,54	3,42	3,55	4,1	3,68
<b>Saturated</b>								
<b>X<sub>d</sub></b>	Direct-axis synchronous reactance	%	356,1	329,7	318,5	330,6	381,3	342,4
<b>X'<sub>d</sub></b>	Direct-axis transient reactance	%	17,5	16,2	15,6	16,2	18,7	16,8
<b>X''<sub>d</sub></b>	Direct-axis subtransient reactance	%	12,5	11,6	11,1	11,6	13,4	11,9
<b>X<sub>q</sub></b>	Quadrature-axis synchronous reactance	%	114,3	105,8	102,4	106,3	122,3	110,1
<b>X'<sub>q</sub></b>	Quadrature-axis transient reactance	%	114,3	105,8	102,4	106,3	122,3	110,1
<b>X''<sub>q</sub></b>	Quadrature-axis subtransient reactance	%	38,2	35,4	34,2	35,4	40,9	36,7
<b>X<sub>2</sub></b>	Negative-sequence reactance	%	24,8	23	22,2	23	26,6	23,8
<b>X<sub>0</sub></b>	Zero sequence reactance	%	3,83	3,54	3,42	3,55	4,1	3,68
<b>K<sub>cc</sub></b>	Short circuit ratio		0,28	0,3	0,31	0,3	0,26	0,29
<b>T'<sub>d</sub></b>	Transient time constant	sec	0,053	0,053	0,055	0,055	0,068	0,064
<b>T''<sub>d</sub></b>	Subtransient time constant	sec	0,083	0,085	0,085	0,086	0,086	0,086
<b>T'<sub>do</sub></b>	Open circuit time constant	sec	1,08	1,08	1,11	1,11	1,39	1,3
<b>T<sub>a</sub></b>	Armature time constant	sec	0,008	0,008	0,015	0,019	0,022	0,025

## Additional information - Class H / 400V

<b>I<sub>0</sub></b>	Excitation current at no load	A	0,5	0,5	0,7	0,8	0,9	1,1
<b>I<sub>c</sub></b>	Excitation current at full load	A	3,0	3,1	3,2	3,0	2,5	3,3
<b>Overload</b>								
Overload per 20 sec. PRP or 10 sec. COP						300		
Heat dissipation		W	1444	2091	2983	3488	4752	5776
Telephone Harmonic Factor - THF		%	<2	<2	<2	<2	<2	<2
Waveform Distors.(THD) full load LL/LN		%	4,5 / 4,5	4,5 / 4,5	4 / 4	3,8 / 3,8	3,5 / 3,5	3,5 / 3,5
Waveform Distors.(THD) no load LL/LN		%	6,5 / 6	6,5 / 6	5 / 4,5	4,5 / 4,5	3,8 / 3,8	3,8 / 3,8

## Reactance &amp; Time constants- Class H / 480V







Unsaturated (ref. EN60034-4)			NPE32 1S4 C	NPE32 2S4 C	NPE32 1M4 C	NPE32 2M4 C	NPE32 L4 C	NPE32 VL4 C
<b>X<sub>d</sub></b>	Direct-axis synchronous reactance	%	436,4	382	370,8	389	463,6	402,8
<b>X'<sub>d</sub></b>	Direct-axis transient reactance	%	21,5	18,8	18,2	19,1	22,7	19,8
<b>X''<sub>d</sub></b>	Direct-axis subtransient reactance	%	15,3	13,4	13	13,7	16,3	14
<b>X<sub>q</sub></b>	Quadrature-axis synchronous reactance	%	140,1	122,6	119,2	125,1	148,7	129,5
<b>X'<sub>q</sub></b>	Quadrature-axis transient reactance	%	140,1	122,6	119,2	125,1	148,7	129,5
<b>X''<sub>q</sub></b>	Quadrature-axis subtransient reactance	%	46,8	41	39,8	41,7	49,7	43,2
<b>X<sub>2</sub></b>	Negative-sequence reactance	%	30,4	26,6	25,8	27,1	32,3	28
<b>X<sub>0</sub></b>	Zero sequence reactance	%	3,99	3,49	3,38	3,55	4,24	3,68
Saturated								
<b>X<sub>d</sub></b>	Direct-axis synchronous reactance	%	370,9	324,7	315,2	330,6	394,1	342,4
<b>X'<sub>d</sub></b>	Direct-axis transient reactance	%	18,3	16	15,5	16,2	19,3	16,8
<b>X''<sub>d</sub></b>	Direct-axis subtransient reactance	%	13	11,4	11	11,6	13,9	11,9
<b>X<sub>q</sub></b>	Quadrature-axis synchronous reactance	%	119,1	104,2	101,3	106,3	126,4	110,1
<b>X'<sub>q</sub></b>	Quadrature-axis transient reactance	%	119,1	104,2	101,3	106,3	126,4	110,1
<b>X''<sub>q</sub></b>	Quadrature-axis subtransient reactance	%	39,8	34,8	33,8	35,4	42,2	36,7
<b>X<sub>2</sub></b>	Negative-sequence reactance	%	25,8	22,6	21,9	23	27,5	23,8
<b>X<sub>0</sub></b>	Zero sequence reactance	%	3,99	3,49	3,38	3,55	4,24	3,68
<b>K<sub>cc</sub></b>	Short circuit ratio		0,27	0,31	0,32	0,3	0,25	0,29
<b>T'<sub>d</sub></b>	Transient time constant	sec	0,053	0,053	0,055	0,055	0,068	0,064
<b>T''<sub>d</sub></b>	Subtransient time constant	sec	0,083	0,085	0,085	0,086	0,086	0,086
<b>T'<sub>do</sub></b>	Open circuit time constant	sec	1,08	1,08	1,11	1,11	1,39	1,3
<b>T<sub>a</sub></b>	Armature time constant	sec	0,008	0,008	0,015	0,019	0,022	0,025

## Additional information - Class H / 480V

<b>I<sub>o</sub></b>	Excitation current at no load	A	0,5	0,5	0,7	0,8	0,9	1,1
<b>I<sub>c</sub></b>	Excitation current at full load	A	3,0	3,1	3,2	3,0	2,5	3,3
Overload								
Overload per 20 sec. PRP or 10 sec. COP						300		
Heat dissipation		W	1711	2487	3612	4272	6007	7068
Telephone Interference Factor - TIF			<50	<50	<50	<50	<50	<50
Waveform Distors.(THD) full load LL/LN		%	4,5 / 4,5	4,5 / 4,5	4 / 4	3,8 / 3,8	3,5 / 3,5	3,5 / 3,5
Waveform Distors.(THD) no load LL/LN		%	6,5 / 6	6,5 / 6	5 / 4,5	4,5 / 4,5	3,8 / 3,8	3,8 / 3,8







## Efficiencies @ 50Hz

Models		380V 50Hz					400V 50Hz					415V 50Hz					440V 50Hz				
		0.25	0.5	0.75	1	1.1	0.25	0.5	0.75	1	1.1	0.25	0.5	0.75	1	1.1	0.25	0.5	0.75	1	1.1
NPE32 1S4 C	%	76,4	81,4	81,7	80,7	80,2	79,5	81,4	81,6	80,6	80,1	76,1	81,1	81,4	80,4	79,9	75,7	80,8	80,7	79,8	79,3
NPE32 2S4 C	%	79,5	81,6	81,8	80,9	80,4	79,6	81,6	81,7	80,8	80,3	79,2	81,3	81,5	80,6	80,0	78,8	80,9	80,8	80,0	79,5
NPE32 1M4 C	%	79,7	81,8	82,1	81,0	80,5	80,0	82,0	82,2	81,1	80,6	79,5	81,6	81,9	80,8	80,2	79,0	81,1	81,2	80,2	79,7
NPE32 2M4 C	%	80,3	83,6	83,2	82,0	81,4	80,6	83,8	83,3	82,1	81,5	80,1	83,4	83,0	81,8	81,1	79,7	83,0	82,3	81,2	80,6
NPE32 L4 C	%	79,5	81,6	81,8	80,9	80,4	79,6	81,6	81,7	80,8	80,3	79,2	81,3	81,4	80,5	79,9	78,8	80,9	80,8	80,0	79,5
NPE32 VL4 C	%	81,2	83,9	83,7	82,7	82,2	81,8	84,4	84,0	82,9	82,4	81,3	83,9	83,6	82,5	81,9	80,9	83,6	83,0	82,0	81,5

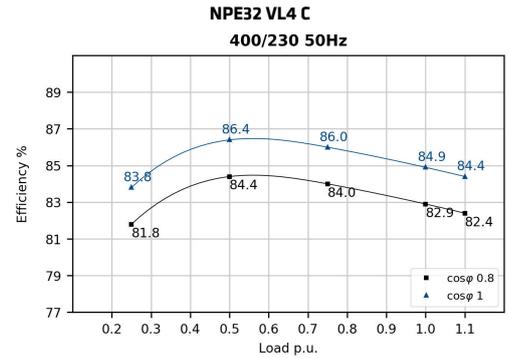
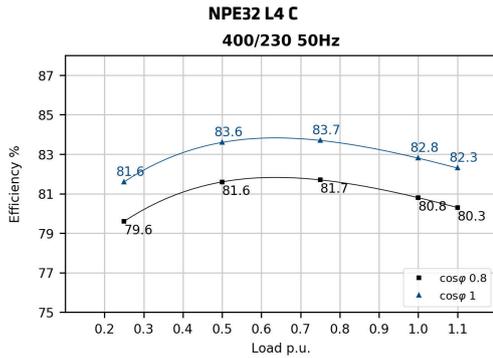
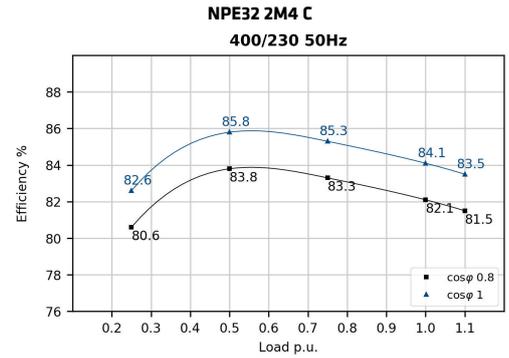
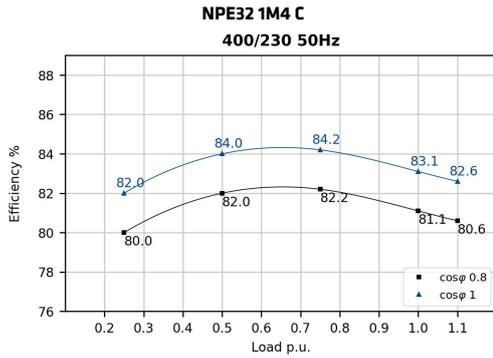
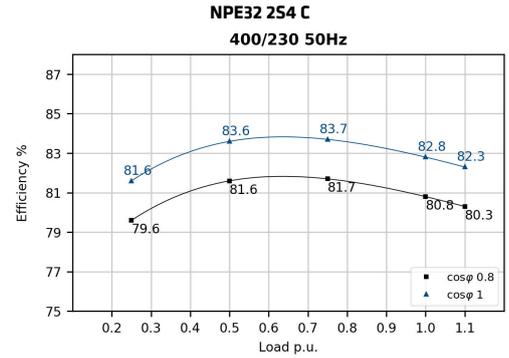
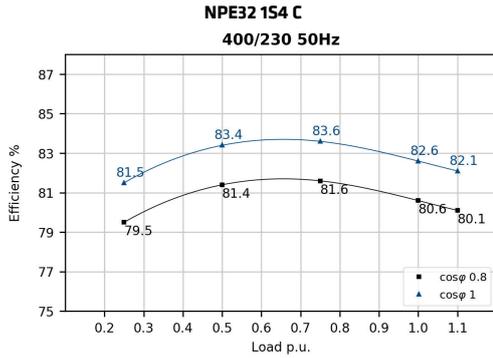


## Efficiencies @ 60Hz

Models		415V 60Hz					440V 60Hz					460V 60Hz					480V 60Hz				
		0.25	0.5	0.75	1	1.1	0.25	0.5	0.75	1	1.1	0.25	0.5	0.75	1	1.1	0.25	0.5	0.75	1	1.1
NPE32 1S4 C	%	76,2	81,3	81,4	80,5	80,1	76,5	81,4	81,4	80,5	80,0	76,8	81,7	81,8	80,9	80,5	76,8	81,7	81,7	80,8	80,4
NPE32 2S4 C	%	78,9	81,1	81,1	80,4	79,9	79,2	81,2	81,1	80,5	80,0	79,5	81,5	81,5	80,8	80,3	79,5	81,5	81,4	80,7	80,4
NPE32 1M4 C	%	79,2	81,4	81,5	80,4	80,0	79,4	81,5	81,5	80,4	80,0	79,6	81,7	81,8	80,7	80,2	79,8	81,9	81,9	80,8	80,4
NPE32 2M4 C	%	79,7	83,0	82,5	81,3	81,0	80,0	83,2	82,6	81,4	81,0	80,2	83,4	82,9	81,7	81,3	80,4	83,6	83,0	81,8	81,3
NPE32 L4 C	%	78,8	81,0	81,0	80,2	79,8	79,1	81,1	81,0	80,2	79,8	79,4	81,4	81,3	80,5	80,1	79,4	81,4	81,3	80,5	80,2
NPE32 VL4 C	%	81,0	83,7	83,3	82,2	81,8	81,2	83,8	83,3	82,2	81,9	81,4	84,0	83,6	82,5	82,1	81,6	84,2	83,7	82,6	82,2

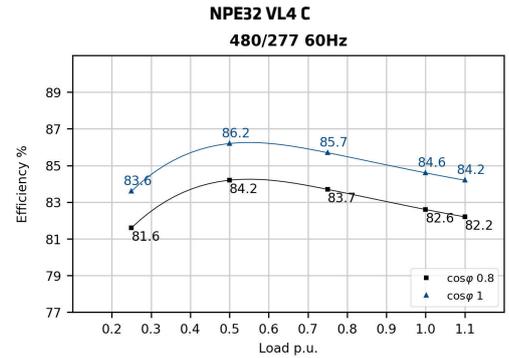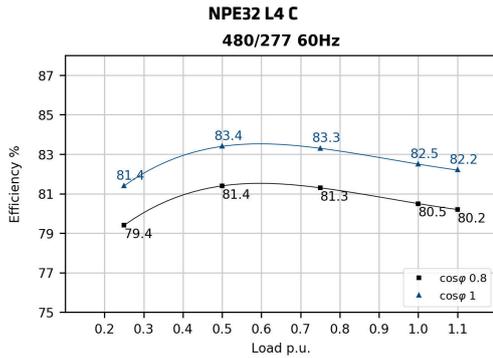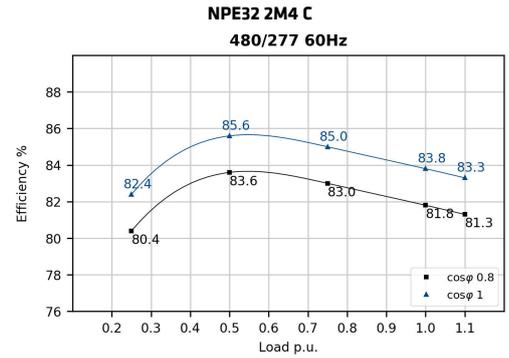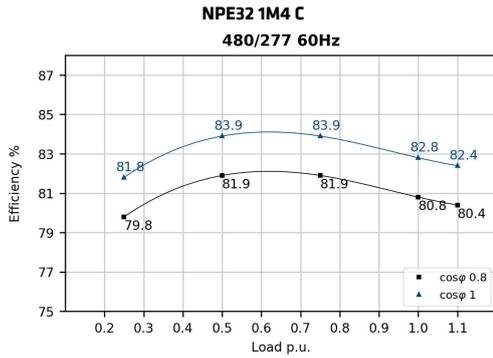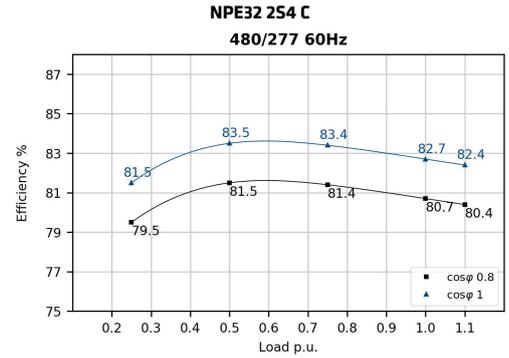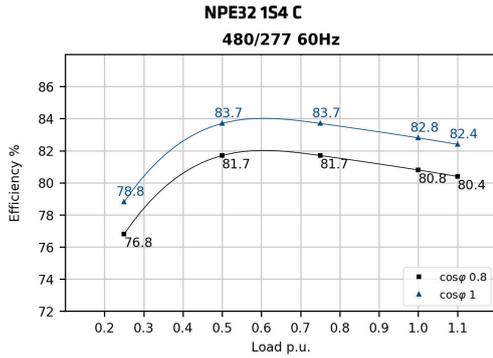

Transients voltage

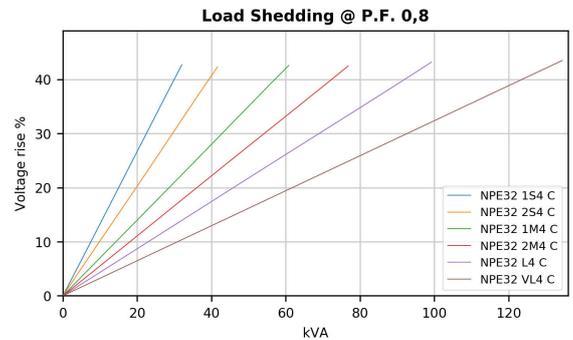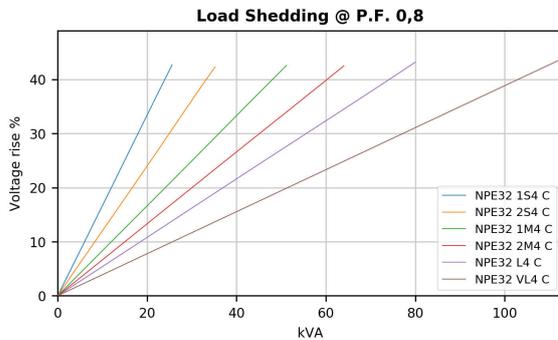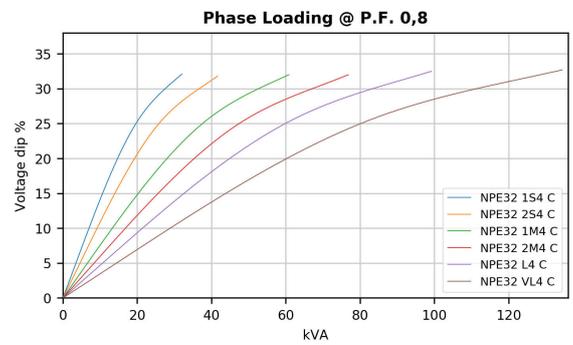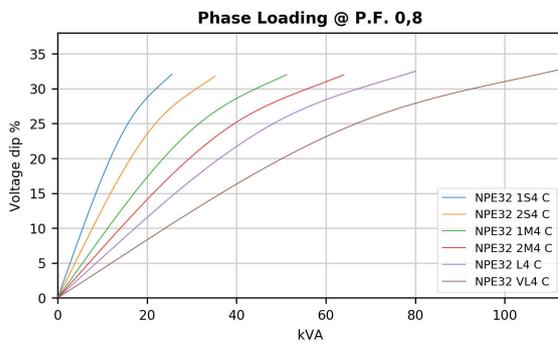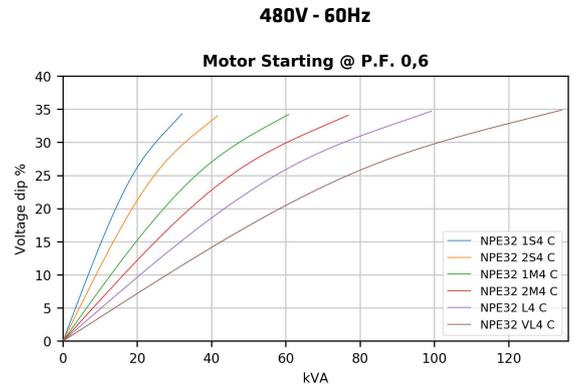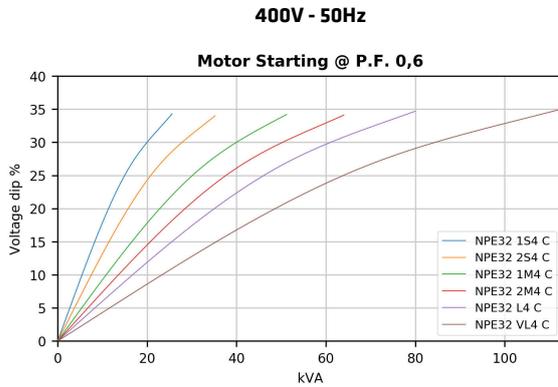

In order to scale transient curves as a function of a power factor or voltage if not indicated, please proceed as follows:

Power Factor coefficient corrector (PFCC), to be used on power factor 0.6 curves:

$$PFCC = \frac{\sin(\text{ARCCos}(PF_{\text{new}}))}{0.8}$$

Example. The PFCC at power factor 0.3 is 1.192 [  $PFCC = \frac{\sin(\text{ARCCos}(0.3))}{0.8}$  ]. This means that the voltage fall at a given power at pf 0.3 is equivalent to the one that can be read on the pf 0.6 curve if the load is considered 1.192 times bigger (19% higher value. ).

In this example, a 100 kVA load insertion at pf 0.3 is equivalent in voltage fall to a 119kVA load insertion at pf 0.6.

Voltage coefficient corrector (VCC):


$$VCC = \left(\frac{400}{V_{\text{new}}}\right)^2 \text{ if } 50 \text{ Hz}; \quad VCC = \left(\frac{480}{V_{\text{new}}}\right)^2 \text{ if } 60 \text{ Hz}$$

Example. VCC at 415V 60 Hz is 1.338 [  $VCC = \left(\frac{480}{415}\right)^2$  ]. This means that the voltage fall at a given power at 415V is equivalent to the one that can be read on the power factor 0.6 curve if the load is considered 1.338 times bigger (33% higher value. ).


In this example, a 100 kVA load insertion at 415V is equivalent in voltage fall to a 133kVA load insertion at 480V.

50Hz Short circuit decrement curves - No load excitation at rated speed


NPE32 1S4 C

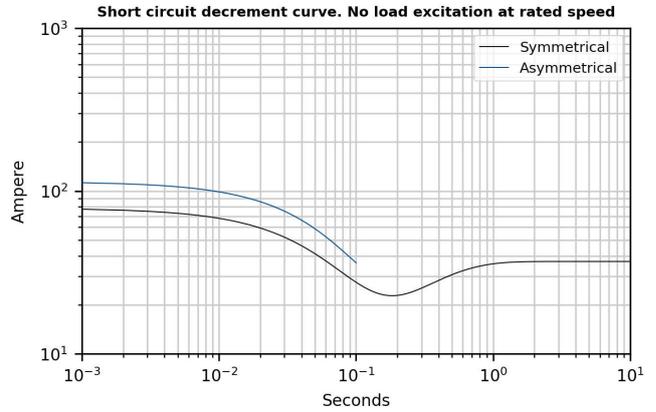


NPE32 2S4 C

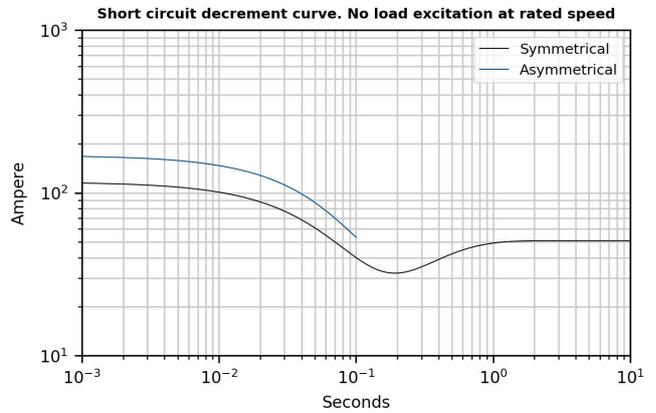

NPE32 1M4 C

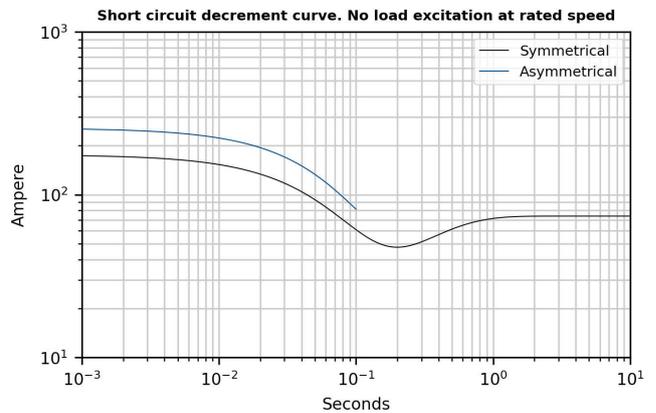


NPE32 2M4 C

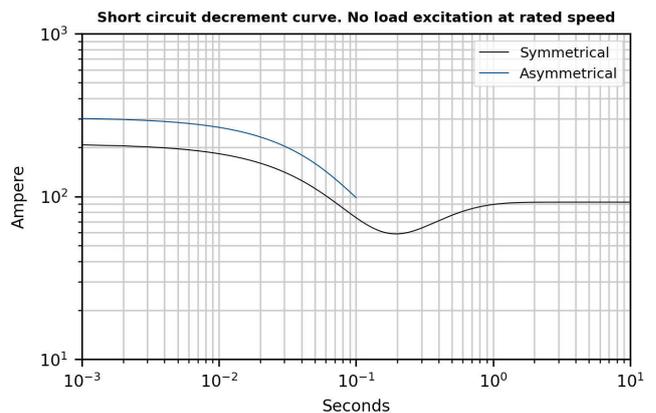


\*Please refer to tables at page 6

50Hz Short circuit decrement curves - No load excitation at rated speed

NPE32 L4 C

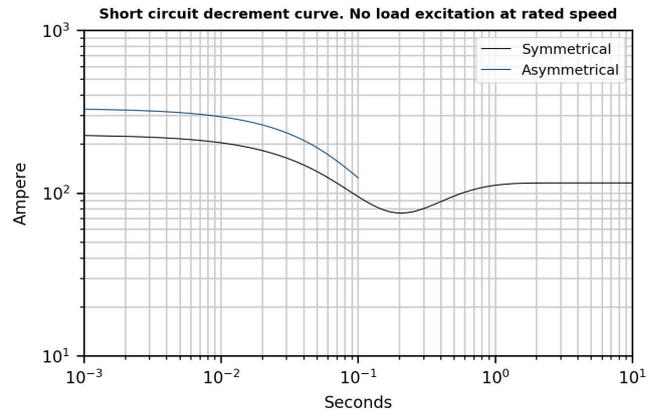


NPE32 VL4 C

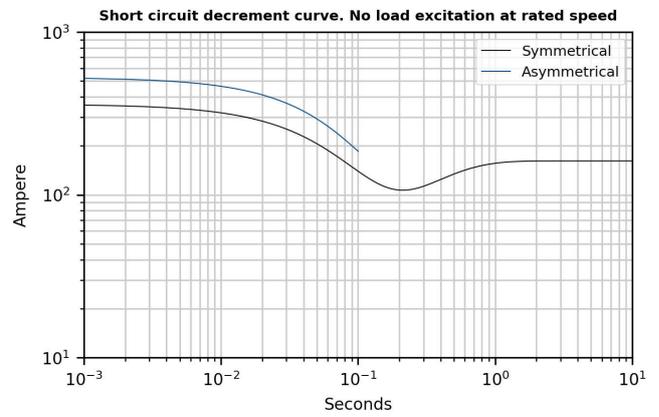


\*Please refer to tables at page 6

60Hz Short circuit decrement curves - No load excitation at rated speed


NPE32 1S4 C

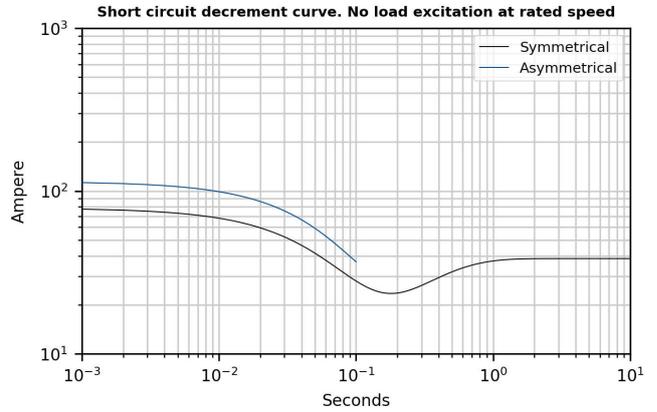


NPE32 2S4 C

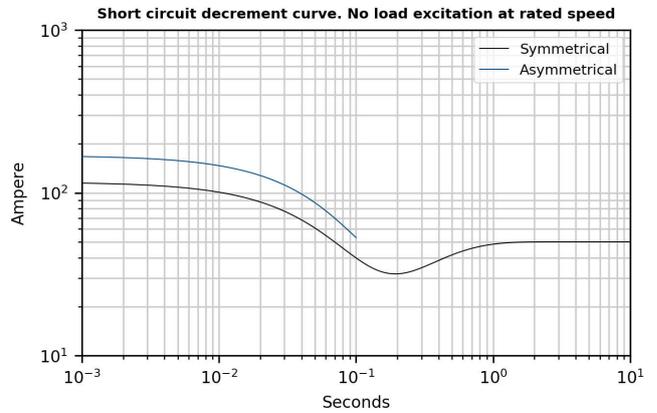

NPE32 1M4 C

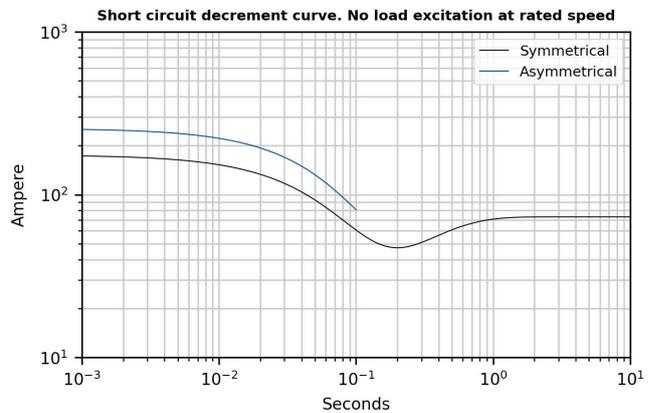


NPE32 2M4 C

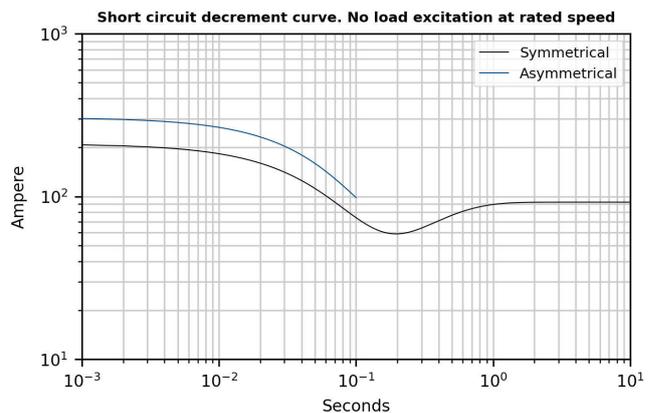


\*Please refer to tables at page 6

60Hz Short circuit decrement curves - No load excitation at rated speed

NPE32 L4 C

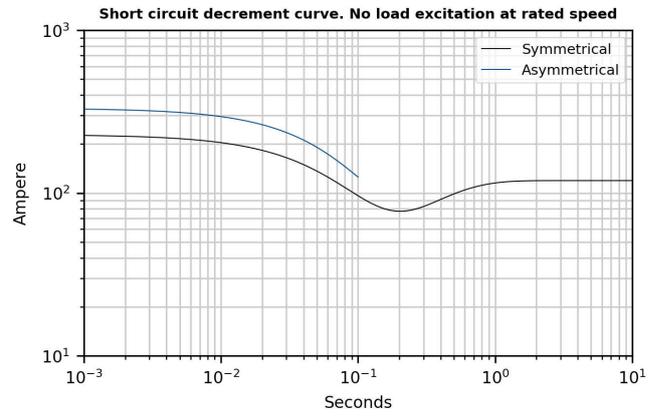

NPE32 VL4 C

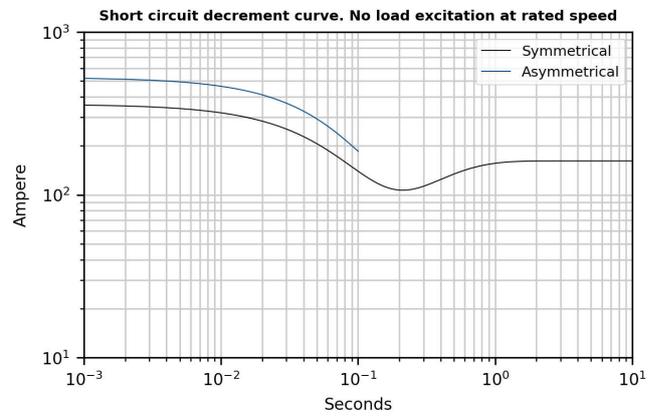


\*Please refer to tables at page 6


## Additional Characteristics

Data	NPE32 1S4 C		NPE32 2S4 C		NPE32 1M4 C		NPE32 2M4 C		NPE32 L4 C		NPE32 VL4 C		
	50Hz	60Hz	50Hz	60Hz	50Hz	60Hz	50Hz	60Hz	50Hz	60Hz	50Hz	60Hz	
Damper cage	Copper												
Single stator coil resistance (20°C)	Ω	1,17		0,73		0,295		0,18		0,15		0,11	
Rotor Winding Resistance (20°C)	Ω	0,662		0,707		0,798		0,889		0,957		1,139	
Stator Exciter Resistance (20°C)	Ω	11,05		11,05		11,05		11,05		11,05		11,05	
Rotor Exciter Resistance (20°C)	Ω	0,32		0,32		0,32		0,32		0,32		0,32	
Auxiliary Winding Resistance (20°C)	Ω	-		-		-		-		-		-	
Weight of complete generator	kg	77,0		83,0		98,0		109,0		120,0		145,0	
Unbalanced magnetic pull	kN/mm	3,8		3,8		3,9		3,9		4,2		4,5	
Air flow	m <sup>3</sup> /min	9,3	12,0	9,3	12,0	9,3	12,0	9,3	12,0	9,3	12,0	9,3	12,0
Noise level at 1m/7m	dB(A)	64/54	67/58	64/54	67/58	64/54	67/58	64/54	67/58	64/54	67/58	64/54	67/58

## PQ Diagram

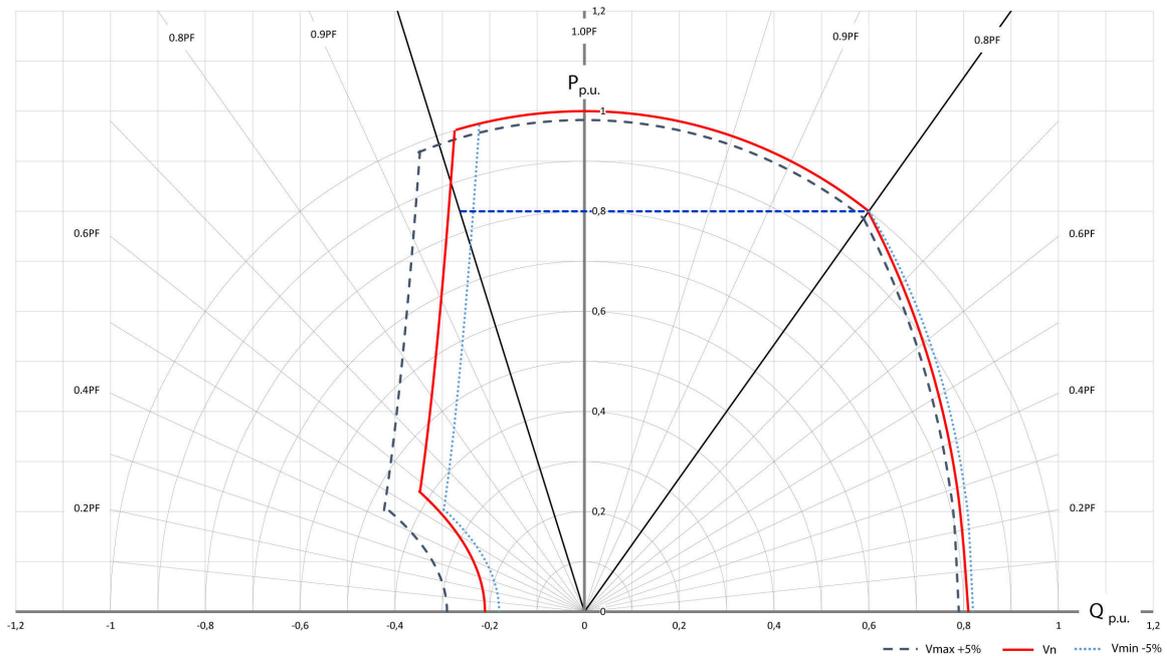

\* The PQ diagram above refers to three-phase application only.

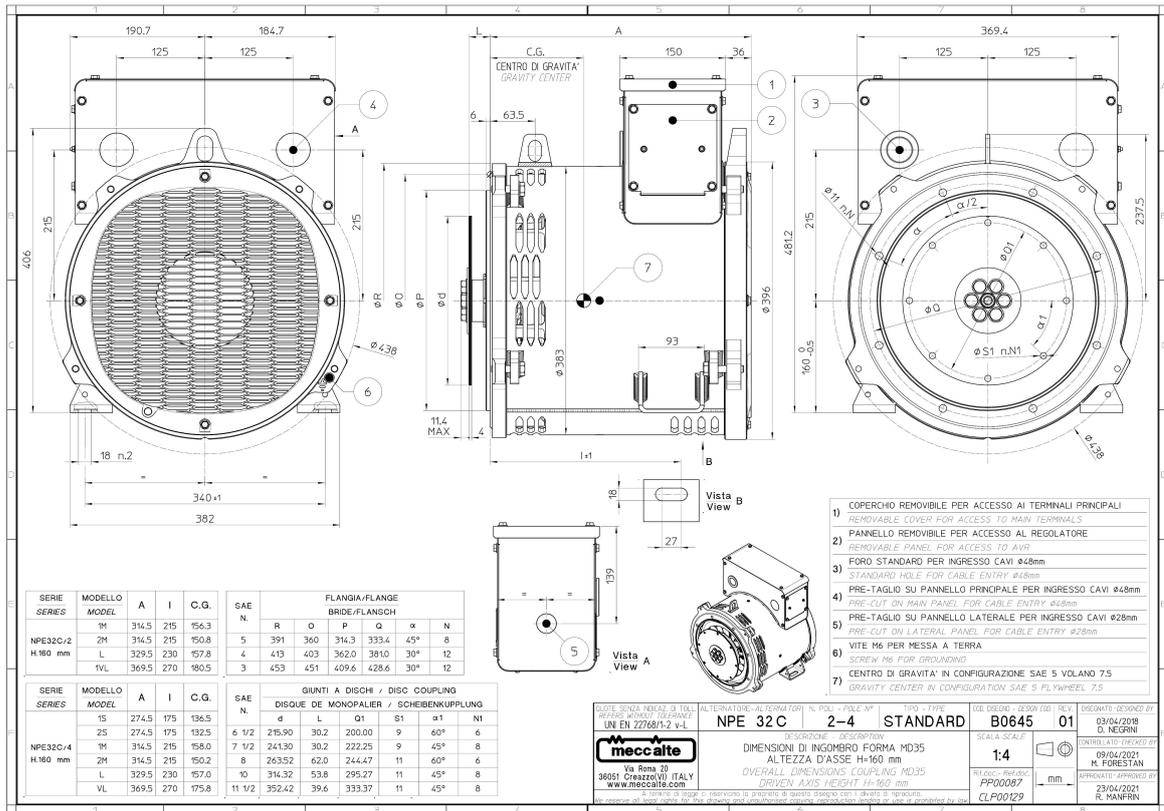

### MOMENTS OF INERTIA - SINGLE BEARING

SAE N.	A [mm]	B [mm]	Weight [kg]	J [kg*m <sup>2</sup> ]
6 1/2	4	2	1.4	0.0067
7 1/2	4	2	1.7	0.0104
8	35.6	28.3	2.9	0.0159
10	27.6	22.9	3.2	0.0304
11 1/2	14	11.2	3.7	0.0472

TYPE	C [mm]		D [mm]		E [mm]		F [mm]	
	Weight [kg]	J [kg*m <sup>2</sup> ]						
NPE32 1S/4C	138.7		237.6		49		296	
NPE32 2S/4C	133.7							
NPE32 1M/4C	161.2		277.6		89		336	
NPE32 2M/4C	153.7							
NPE32 L/4C	161.2		292.6		104		351	
NPE32 VL/4C	181.2		332.6		144		391	

\* Shaft mass and inertia also include rotor keys

TYPE	COMPONENT								TOTAL	
	1 FAN		2 MAIN ROTOR		3 EXCITER ROTOR		4 SHAFT*		Weight [kg]	J [kg*m <sup>2</sup> ]
NPE32 1S/4C	14.4	0.0992	21.2	0.1440	6.3	0.0426	6.6	0.0034	28.3	0.1593
NPE32 2S/4C	16.7	0.1141	21.2	0.1440			7.6	0.0040	30.6	0.1742
NPE32 1M/4C	25.7	0.1739	29.1	0.1963			8	0.0042	40.6	0.2346
NPE32 2M/4C	29.1	0.1963	38.1	0.2562			9.1	0.0049	44.4	0.2572
NPE32 L/4C	38.1	0.2562							54.5	0.3178

REV.	DATE	REVIEWS	DESIGN BY	APPROVED BY
00	02/09/2025	FIRST ISSUE	Radenovic N.	Lusa F.

Via Roma 20  
36051 Creazzo(VI) ITALY  
www.meccalte.com

DESCRIPTION					
MOMENTS OF INERTIA - SINGLE BEARING					
NPE32C					
FORMAT	A4	SCALE	1:3	REF.DOC	-
PART N.	D00448	MODEL REV.	00	DRW REV.	00

We reserve all legal rights for this drawing and unauthorised copying, reproduction lending or use is prohibited by law.

SERIE / SERIES	MODELLO / MODEL	A	I	C.G.	SAE N.	FLANGIA/FLANGE BRIDE/FLANSCH					
NPE32C/2 H.200 mm	1M	314.5	215	156.3	5	R	O	P	Q	α	N
	2M	314.5	215	150.8	4	413	403	362.0	381.0	30°	12
	VL	369.5	270	180.6	3	453	451	409.6	428.6	30°	12

SERIE / SERIES	MODELLO / MODEL	A	I	C.G.	SAE N.	GIUNTI A DISCH / DISC COUPLING					
NPE32C/4 H.200 mm	1S	274.5	175	136.6	6	d	L	Q1	S1	α1	N1
	2S	274.5	175	130.5	6 1/2	215.90	30.2	200.00	9	60°	6
	1M	314.5	215	158.0	7 1/2	241.30	30.2	222.25	9	45°	8
	2M	314.5	215	150.2	8	263.52	62.0	244.47	11	60°	6
	VL	329.5	230	157.1	10	314.32	53.8	295.27	11	45°	8

1) COPERCHIO REMOVIBILE PER ACCESSO AI TERMINALI PRINCIPALI  
REMOVABLE COVER FOR ACCESS TO MAIN TERMINALS

2) PANNELLO REMOVIBILE PER ACCESSO AL REGOLATORE  
REMOVABLE PANEL FOR ACCESS TO AVR

3) FORO STANDARD PER INGRESSO CAVI ø48mm  
STANDARD HOLE FOR CABLE ENTRY ø48mm

4) PRE-TAGLIO SU PANNELLO PRINCIPALE PER INGRESSO CAVI ø48mm  
PRE-CUT ON MAIN PANEL FOR CABLE ENTRY ø48mm

5) PRE-TAGLIO SU PANNELLO LATERALE PER INGRESSO CAVI ø28mm  
PRE-CUT ON LATERAL PANEL FOR CABLE ENTRY ø28mm

6) VITE M6 PER MESSA A TERRA  
SCREW M6 FOR GROUNDING

7) CENTRO DI GRAVITA' IN CONFIGURAZIONE SAE 5 VOLANO 7.5  
GRAVITY CENTER IN CONFIGURATION SAE 5 FLYWHEEL 7.5

SERIE / SERIES	MODELLO / MODEL	A	I	C.G.	SAE N.	DISQUE DE MONOPALIER / SCHEBENKUPPLUNG					
NPE32C/4 H.200 mm	1S	274.5	175	136.6	6	d	L	Q1	S1	α1	N1
	2S	274.5	175	130.5	6 1/2	215.90	30.2	200.00	9	60°	6
	1M	314.5	215	158.0	7 1/2	241.30	30.2	222.25	9	45°	8
	2M	314.5	215	150.2	8	263.52	62.0	244.47	11	60°	6
	VL	329.5	230	157.1	10	314.32	53.8	295.27	11	45°	8

ALTERNATORE - ALTERNATOR | N. POLI - POLE | TIPO - TYPE

UN EN 22768/1-2 V-L | NPE 32C | 2-4 | STANDARD

000 DESIGN - 02809 (02) | REV. 22/03/2018 | S. SACRIN

DESCRIZIONE - DESCRIPTION  
DIMENSIONI DI INGOMBRIO FORMA MD35  
ALTEZZA D'ASSE H=200 mm  
OVERALL DIMENSIONS COUPLING MD35  
DRIVEN AXIS HEIGHT H=200 mm

SCALA - SCALE  
1:4

09/04/2021  
A. FELLIZZARO  
23/04/2021  
R. MANFRIN



---

**Mecc Alte SpA (HQ)**

Via Roma  
20 - 36051 Creazzo  
Vicenza - ITALY  
T: +39 0444 396111  
E: info@meccalte.it  
aftersales@meccalte.it

---

**Mecc Alte Portable**

Via Roma  
20 - 36051 Creazzo  
Vicenza - ITALY  
T: +39 0444 396111  
E: info@meccalte.it

---

**Mecc Alte Power Products srl**

Via Melaro  
Z - 36075 Montecchio  
Maggiore (VI) - ITALY  
T: +39 0444 1831295  
E: info@meccalte.it

---

**Zanardi Alternatori srl**

Via Dei Laghi  
48/B - 36077 Altavilla  
Vicenza - ITALY  
T: +39 0444 370799  
E: info@zanardialternatori.it

---

**United Kingdom**

Mecc Alte U.K. LTD  
6 Lands' End Way  
Oakham  
Rutland LE15 6RF  
T: +44 (0) 1572 771160  
E: info@meccalte.co.uk

---

**Spain**

Mecc Alte España S.A.  
C/ Rio Taibilla, 2  
Polig. Ind. Los Valeros  
03178 Benijofar (Alicante)  
T: +34 (0) 96 6702152  
E: info@meccalte.es

---

**China**

Mecc Alte Alternator Haimen LTD  
755 Nanghai East Rd  
Jiangsu HEDZ 226100 PRC  
T: +86 (0) 513 82325758  
E: info@meccalte.cn

---

**India**

Mecc Alte India PVT LTD  
Plot NO: 1, Sanaswadi  
Talegaon  
Dhamdhare Road Taluka:  
Shirur, District:  
Pune - 412208  
Maharashtra, India  
T: +91 2137 619600  
E: info@meccalte.in

---

**U.S.A. and Canada**

Mecc Alte Inc.  
1229 Adams Drive  
McHenry, IL, 60051  
T: +1 815 344 0530  
E: info@meccalte.us

---

**Germany**

Mecc Alte Generatoren GmbH  
Bucher Hang 2  
D-87448 Waltenhofen  
T: +49 (0)831 540755 0  
E: info@meccalte.de

---

**Australia**

Mecc Alte Alternators PTY LTD  
10 Duncan Road, PO Box 1046  
Dry Creek, 5094, South  
Australia  
T: +61 (0) 8 8349 8422  
E: info@meccalte.com.au

---

**France**

Mecc Alte International S.A.  
Z.E.La Gagnerie  
16330 ST.Amant de Boixe  
T: +33 (0) 545 397562  
E: info@meccalte.fr

---

**Far East**

Mecc Alte (F.E.) PTE LTD  
19 Kian Teck Drive  
Singapore 628836  
T: +65 62 657122  
E: info@meccalte.com.sg



[www.meccalte.com](http://www.meccalte.com)