



Totally Focused. Totally Independent.

Technical Specification

ECP34 4 C



The world's largest  
independent producer of  
alternators 1 – 5,000kVA

**All electrical and mechanical data contained in this document is provided for reference only and represents typical values under optimal operating conditions. Actual performances may be subjected to cumulative tolerances or variances due to materials, construction or other specific operating and loading conditions, in accordance with IEC 60034.**

**Mecc Alte S.p.A. reserves the right to change specifications without notice. The information contained in this document does not constitute a guarantee of performance for any specific application. For specific technical information, please contact your local Mecc Alte office.**

**This document is the property of Mecc Alte S.p.A. – All rights reserved. Reproduction, distribution, or transmission of this publication, in whole or in part, is prohibited without prior written consent.**

## Regulations and Certifications

The alternators are designed, built and tested in accordance with **ISO 9001**, within a certified quality management system. The entire range meets the most common international specifications, including:

- ▶ CEI 2-3, IEC 34-1, EN 60034-1, VDE 0530
- ▶ BS 4999-5000, NF 51.111, NEMA MG 1-2011
- ▶ ISO 8528-3

In addition, they comply with specific regulations for particular markets, such as:

- ▶ UL 1446, UL 1004-4, UL 1004-B
- ▶ CAN/CSA-C22.2 No14-95 / No100-95

The ECP and ECO series comply with EEC directives **2006/42/EC (Machinery Directive)**, **2014/35/EC (Low Voltage Directive)**, **2014/30/EC (Electromagnetic Compatibility Directive)**, **2011/65/EC (RoHS 2)** and **2015/863 (RoHS 3)**.

## Windings and performance

All alternators are equipped with **reduced pitch windings (2/3)**. This configuration allows:

- ▶ The elimination of triple harmonics in the voltage waveform
- ▶ Reduction of neutral currents in parallel operation

All models, except the **ECP3 series**, are equipped with an aluminum or copper **cushioning cage** to ensure greater stability during load transients.

- ▶ 12 reconnectable wires:
  - 50 Hz - from 380 V to 440 V and from 220/110 V to 240/120 V (with possible derating)
  - 60 Hz - from 380 V to 480 V and from 220/110 V to 240/120 V (with possible derating)
- ▶ 6 reconnectable wires:
  - 50 Hz - from 380 V to 440 V and from 220 V to 240 V (with possible derating)
  - 60 Hz - from 380 V to 480 V and from 220 V to 240 V (with possible derating)

Winding configurations	Standard		Special (dedicated)			
	12 reconnectable wires	6 reconnectable wires	380 V and 600 V 60 Hz	690V 50/60Hz	220-240V 1ph 50Hz	220-240V 1ph 60Hz
ECP3 to ECO38 & (NPE)	●	○	○	○	○	○
ECO40 to ECO46	○	●	○	○	○ *	○ *
ECO47	● 4 wires		○	○	-	-
THD (Total Harmonic Distortion)	Typically <3.5% at full load L-L	Typically <3.0% at full load L-L	Typically <3.5% at full load L-L	Typically <3.5% at full load L-L	Typically <4.5% at full load L-N	Typically <4.5% at full load L-N
Interference suppression	VDE 0875 G/N/K, EN61000-6-3, EN61000-6-2, others available on request					

\* Only up to ECO40 series      ● Standard      ○ Optional

## Insulating Materials and Electrical Performance

- ▶ **Insulation Class:** H on the entire range
- ▶ **Efficiency:** High efficiency as standard
- ▶ **Motor Start:** Inrush current >300% for 20 seconds
- ▶ **THD (Total Harmonic Distortion):**
  - <3.5% L-L typical (three-phase windings)
  - <4.5% L-N typical (single-phase windings)

## Winding protection

Winding protection is crucial to ensure the longevity of the generator based on environmental conditions and electrical stress.

Protection Level	Standard	Standard+	Grey	Grey+	Total+	V-Type
Treated Components	Active parts	Exciter stator	Main stator + exciter	Stator + Exciter	Stator + Exciter + Rotor	Complete system
Type of Treatment	Impregnation resin only	Resin + Grey paint EG43	Grey paint EG43	Stator (EG43) + Exciter (Black severe ep.)	Black protection (stators) + EG43 (rotating parts)	Double VPI, Anti-Corona Wire, Double Layer Black
Series/Typical Application	ECP3, ECP4 (Standard Use)	ECP28, 30, 32	Marine Applications / NPE, ECO, HCP	Harsh industrial environments	Extreme/abusive conditions	Harsh Environments (Extended Warranty)

Detail of specific treatments

- ▶ **Grey paint EG43:** Standard protection against moisture and contaminants.
- ▶ **Black Protection:** Advanced physical barrier against chemicals and high humidity.
- ▶ **V-Type Treatment:** Includes vacuum impregnation (VPI), internal stator insulation, and corona-resistant materials for maximum reliability.


For more information visit: [Insulation\\_System\\_Guide](#)

## Construction


The robust mechanical structure withstands up to 5G in any direction and 9G vertically, and its design allows easy access to connections and components during routine maintenance checks. The mechanical design used the most advanced FEM techniques. The materials used are: DD12 steel for the frame, C45 steel for the shaft and cast iron or die-cast aluminum for the end brackets: the fans are made of die-cast aluminum and nylon reinforced with fiberglass, UL compliant materials. The rotors are dynamically balanced according to ISO 1940-1 grades 6.3 (up to series 32) or 2.5 (series 34 onwards).

## Terminals and terminal blocks

Easy access to the regulators is ensured by a pull-out drawer or drop-down panel to allow for safer adjustment. Large terminal blocks allow easy access of power cables, in the higher power ranges ECO43 and ECO46 terminals allow convenient choice of power cable or busbar connection with input and connection versatility. Current transformers are available as an option on the ECO 40, 43, 46 and 47 series with single or dual output.

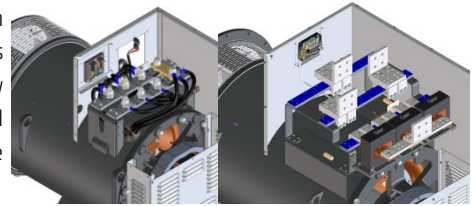


A new AVR panel has been installed on the Type-C family. The terminal blocks have been redesigned in a special "L" configuration, specifically to facilitate connections with customers; With this type of terminal block, a second terminal block can be positioned in order to obtain 12 terminals available. Current transformers are available as an option on the ECO38 series with single or dual output.

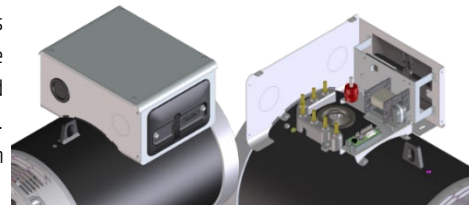

## Protection for the environment

In addition to the protection on the windings themselves, alternators can have a higher degree of protection. The standard level is IP23 but the following solutions are also available: IP23 DP with ingress filters, IP23 with terminal box only in IP45, IP43 and IP45. Downgrades may apply. For more information visit: [Bulletin\\_IP](#)




## Optional PMG

The MeccAlte PMG is optionally available factory-fitted on ECP28, ECP30, ECP32, ECP34 and ECO38; Alternatively, only the preparation for future mounting is optional.




On the ECO 40, 43 and 46 series it is optionally available factory-fitted or retrofitted. On the ECO47 the PMG is standard.

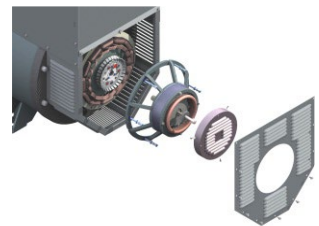

The entire AVR range is fully compatible with MAUX and PMG systems, minimizing spare parts management and inventory flexibility, as one AVR adapts to all applications. The PMG delivers the same amount of kVA as the MAUX.

## Anti-condensation heater

Our entire range can be equipped with anti-condensation heaters of adequate power and sized to the alternator. The voltage for heaters must be specified when ordering. New cylindrical cartridge heaters are available on request and can be retrofitted.

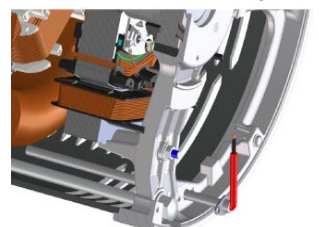

## Accessories

Additional optional can be mounted on our alternator series, such as PTC or PT100 thermistors on both windings and bearings, anti-condensation heaters, high and low profile terminal blocks (on most series), parallel devices, current and voltage transformers, air filters, IP43 and IP45 protections and many more. For more information visit: [C-type-accessories](#)

## Excitation and regulation systems

All ECP/ECO series are equipped with MAUX auxiliary winding to power the digital controller.

### DxR

Both the DSR and DER1 are available for PC connection via the DxR2 USB interface and DxR TERMINAL software to query/download alarms and settings for analysis or for cloning other controllers. DER2 has a built-in USB connection and can be connected to your PC without any optional connection card. Through the DxR connection, other settings such as LAMS, synchronous external control based on digital RAM, and soft start can be achieved. Simple analog potentiometers are available for the most common adjustments.

### MxK

The digital controllers of the MxK series (M2K, M2Ks, M3K, M3Ks, M3KSHD) are configurable via the MeccAlte App for PC or mobile devices, using the USB2MxK (USB) or MxKconnect (Wi-Fi) accessories. The M3KSHD model integrates a USB port for direct connection to the PC, without the need for optional cards. The M2Ks, M3Ks and M3KSHD models also support CAN Bus communication (SAE J-1939) for integration with MeccAlte GC controllers. Software-accessible features include LAMS, external voltage control ( $\pm 10V$ ), soft start, and PID autotuning. The controller records up to 64 alarms in E2PROM memory and provides the current status via A ALARMS address. There are analog potentiometers for VOLT, STAB, AMP, and DROOP (the latter on M3K, M3Ks, and M3KSHD models only). The M3KSHD includes High Dynamic Response (HDR) for a quick rush of excitement. All MxK regulators are equipped with protections against over/under excitation, overcurrent, V/f, short circuit and power overvoltage.

Regulator	M2K	M2Ks	M3K	M3Ks	M3KsHD	DSR	DER1	DER2
ECP3 to ECO38 & (NPE)	●	○	○	○	○	○	○	○
ECO40 to ECO46	○	○	●	○	○	○	○	○
ECO47	○	○	○	○	●	○	○	○
Parallel operation	-	-	√	√	√	√	√	√
Network Parallel	-	-	√	√	√	√	√	√
Reference 3 phase (rms)	-	-	√	√	√	-	√	√
Accuracy	+/-0.5%	+/-0.5%	+/-0.5%	+/-0.5%	+/-0.5%	+/-1%	+/-0.5%	+/-0.5%
Remote voltage control	√	√	√	√	√	√	√	√
Alarm log	√	√	√	√	√	√	√	√
Analog and digital configurable	√	√	√	√	√	√	√	√
LAMS (Load Acceptance V/f)	√	√	√	√	√	√	√	√
APO (Active Protection Output)	-	-	-	-	√	√	√	√
Soft start	√	√	√	√	√	√	√	√
High Dynamic Response	-	-	-	-	√	-	-	√
USB connection without external cards	-	-	-	-	√	-	-	√

● Standard    ○ Optional    √ Available

## Derating coefficients

Altitude (meters)	Ambient temperature (Celsius)							
	25	40	45	50	55	60	65	70
$\leq 1000$	1.07	1	0.96	0.93	0.91	0.89	0.85	0.82
$> 1000 \leq 1500$	1.01	0.96	0.92	0.89	0.87	0.84	0.81	0.77
$> 1500 \leq 2000$	0.96	0.91	0.87	0.84	0.83	0.79	0.77	0.73
$> 2000 \leq 3000$	0.90	0.85	0.81	0.78	0.76	0.73	0.71	0.68
$> 3000 \leq 4000$	0.84	0.78	0.75	0.73	0.70	0.68	0.66	0.62
$> 4000 \leq 5000$	0.78	0.72	0.69	0.67	0.65	0.62	0.59	0.56
$> 5000 \leq 6000$	0.70	0.65	0.63	0.61	0.58	0.55	0.53	0.50

## Notes on short-circuit curves

The coefficients indicated must be used to correct the values of the three-phase short-circuit curves as a function of the nominal voltage.

The indicated coefficient must be used to correct the values of the three-phase short-circuit curves as a function of the type of short-circuit voltage.

50 Hz		60 Hz			3 Steps	2 L-L phases	1 L-N phase
Voltage	Factor	Voltage	Factor				
380	0.93x	415	0.85x	Instant	1x	0.87x	1.30x
400	1x	440	0.90x	Minimum	1x	1.80x	3.20x
415	1.04x	460	0.95x	Supported	1x	1.50x	2.50x
440	1.10x	480	1x	Maximum duration	20 s	10 s	4 s

All curves are shown for star connection in series or parallel at 400V 50 Hz or 480V 60 Hz. If the unit is reconnected from series to star parallel, the additional coefficient is 2x. From the star series to the delta series, it is 1.72x. From star in series to parallel triangle, it is 3.44x.

A smaller generator can be selected for a given engine starting service, as it has lower subtransient reactance values for nonlinear loads. The entire range from 6.5 to 3400 kVA is capable of delivering a sustained short-circuit current of >300% for up to 20 seconds.

## MeccAlte Tools

This section provides direct access to professional tools developed to support alternator selection, sizing and configuration. These tools ensure solutions that are aligned with the electrical and mechanical requirements of each project.

### Key features

With a data-driven approach, you can optimize performance and reduce scaling risks:

- ▶ **Targeted Selection:** Identify the ideal alternator based on load profiles and operating conditions.
- ▶ **Power Calculations:** performs the sizing of the engine and alternator respecting the electrical constraints.
- ▶ **Parameter Verification:** Controls engine starting capability and handling of unbalanced and distorted loads.
- ▶ **PMG Configuration:** Configure permanent magnet alternators for AC/DC outputs or battery chargers.

For more information visit: [MeccAlte Tools](#)

## General characteristics

Pole number	4	Insulation class	H
Phase number	3	Protection class	IP23
Number of wires	12	NDE Bearing type	6311.2RS
Execution	Brushless	DE Bearing type	6314.2RS
Regulator type	M2K	Maximum Overspeed	2250
Winding pitch	2/3	Altitude	0-1000
Code voltage reference	T0405S3	Balancing	ISO1940-1

## Ratings 50Hz

kVA / kW @ Temp. Rise / Ambient °C - 0.8 PF

	STANDBY-163/27				STANDBY-150/40				H-125/40				F-105/40				B-80/40				
	Series Star Y	380V	400V	415V	440V	380V	400V	415V	440V	380V	400V	415V	440V	380V	400V	415V	440V	380V	400V	415V	440V
Parallel Star YY	190V	200V	208V	220V	190V	200V	208V	220V	190V	200V	208V	220V	190V	200V	208V	220V	190V	200V	208V	220V	
Series Delta Δ	220V	230V	240V	254V	220V	230V	240V	254V	220V	230V	240V	254V	220V	230V	240V	254V	220V	230V	240V	254V	
Parallel Delta ΔΔ	110V	115V	120V	127V	110V	115V	120V	127V	110V	115V	120V	127V	110V	115V	120V	127V	110V	115V	120V	127V	
<b>ECP34 1S4 C</b>	<b>kVA</b>	96	<b>96</b>	96	79	93	<b>93</b>	93	77	87,5	<b>87,5</b>	87,5	72	79	<b>79</b>	79	65	70	<b>70</b>	70	58
	<b>kW</b>	77	<b>77</b>	77	63	74	<b>74</b>	74	62	70	<b>70</b>	70	58	63	<b>63</b>	63	52	56	<b>56</b>	56	46
<b>ECP34 2S4 C</b>	<b>kVA</b>	110	<b>110</b>	110	88	105	<b>105</b>	105	86	100	<b>100</b>	100	80	90	<b>90</b>	90	72	80	<b>80</b>	80	64
	<b>kW</b>	88	<b>88</b>	88	70	84	<b>84</b>	84	69	80	<b>80</b>	80	64	72	<b>72</b>	72	58	64	<b>64</b>	64	51
<b>ECP34 1M4 C</b>	<b>kVA</b>	137	<b>137</b>	137	117	132	<b>132</b>	132	112	125	<b>125</b>	125	106	112	<b>112</b>	112	96	100	<b>100</b>	100	85
	<b>kW</b>	110	<b>110</b>	110	94	106	<b>106</b>	106	90	100	<b>100</b>	100	85	90	<b>90</b>	90	77	80	<b>80</b>	80	68
<b>ECP34 2M4 C</b>	<b>kVA</b>	148	<b>148</b>	148	125	143	<b>143</b>	143	120	135	<b>135</b>	135	114	121	<b>121</b>	121	103	108	<b>108</b>	108	91
	<b>kW</b>	118	<b>118</b>	118	100	114	<b>114</b>	114	96	108	<b>108</b>	108	91	97	<b>97</b>	97	82	86	<b>86</b>	86	73
<b>ECP34 1L4 C</b>	<b>kVA</b>	165	<b>165</b>	165	137	158	<b>158</b>	158	131	150	<b>150</b>	150	125	136	<b>136</b>	136	113	120	<b>120</b>	120	100
	<b>kW</b>	132	<b>132</b>	132	110	126	<b>126</b>	126	105	120	<b>120</b>	120	100	109	<b>109</b>	109	90	96	<b>96</b>	96	80
<b>ECP34 2L4 C</b>	<b>kVA</b>	176	<b>181</b>	181	170	169	<b>174</b>	174	163	160	<b>165</b>	165	155	144	<b>149</b>	149	139	128	<b>132</b>	132	124
	<b>kW</b>	141	<b>145</b>	145	136	135	<b>139</b>	139	130	128	<b>132</b>	132	124	115	<b>119</b>	119	111	102	<b>106</b>	106	99

## Ratings 60Hz

kVA / kW @ Temp. Rise / Ambient °C - 0.8 PF

	STANDBY-163/27				STANDBY-150/40				H-125/40				F-105/40				B-80/40				
	Series Star Y	415V	440V	460V	480V	415V	440V	460V	480V	415V	440V	460V	480V	415V	440V	460V	480V	415V	440V	460V	480V
Parallel Star YY	208V	220V	230V	240V	208V	220V	230V	240V	208V	220V	230V	240V	208V	220V	230V	240V	208V	220V	230V	240V	
Series Delta Δ	240V	254V	265V	277V	240V	254V	265V	277V	240V	254V	265V	277V	240V	254V	265V	277V	240V	254V	265V	277V	
Parallel Delta ΔΔ	120V	127V	133V	138V	120V	127V	133V	138V	120V	127V	133V	138V	120V	127V	133V	138V	120V	127V	133V	138V	
<b>ECP34 1S4 C</b>	<b>kVA</b>	108	115	115	<b>115</b>	104	111	111	<b>111</b>	98	105	105	<b>105</b>	88	95	95	<b>95</b>	78	84	84	<b>84</b>
	<b>kW</b>	86	92	92	<b>92</b>	83	89	89	<b>89</b>	78	84	84	<b>84</b>	70	76	76	<b>76</b>	62	67	67	<b>67</b>
<b>ECP34 2S4 C</b>	<b>kVA</b>	120	132	132	<b>132</b>	114	126	126	<b>126</b>	110	120	120	<b>120</b>	99	109	109	<b>109</b>	88	96	96	<b>96</b>
	<b>kW</b>	96	106	106	<b>106</b>	91	101	101	<b>101</b>	88	96	96	<b>96</b>	79	87	87	<b>87</b>	70	77	77	<b>77</b>
<b>ECP34 1M4 C</b>	<b>kVA</b>	143	154	165	<b>165</b>	137	147	159	<b>159</b>	130	140	150	<b>150</b>	116	125	135	<b>135</b>	104	112	120	<b>120</b>
	<b>kW</b>	114	123	132	<b>132</b>	110	118	127	<b>127</b>	104	112	120	<b>120</b>	93	100	108	<b>108</b>	83	90	96	<b>96</b>
<b>ECP34 2M4 C</b>	<b>kVA</b>	154	165	178	<b>178</b>	148	159	172	<b>172</b>	140	150	162	<b>162</b>	125	135	146	<b>146</b>	112	120	130	<b>130</b>
	<b>kW</b>	123	132	142	<b>142</b>	118	127	138	<b>138</b>	112	120	130	<b>130</b>	100	108	117	<b>117</b>	90	96	104	<b>104</b>
<b>ECP34 1L4 C</b>	<b>kVA</b>	165	187	198	<b>198</b>	158	178	189	<b>189</b>	150	170	180	<b>180</b>	132	150	163	<b>163</b>	120	136	144	<b>144</b>
	<b>kW</b>	132	150	158	<b>158</b>	126	142	151	<b>151</b>	120	136	144	<b>144</b>	106	120	130	<b>130</b>	96	109	115	<b>115</b>
<b>ECP34 2L4 C</b>	<b>kVA</b>	187	210	218	<b>218</b>	179	201	208	<b>208</b>	170	191	198	<b>198</b>	155	165	178	<b>178</b>	136	153	158	<b>158</b>
	<b>kW</b>	150	168	174	<b>174</b>	143	161	166	<b>166</b>	136	153	158	<b>158</b>	124	132	142	<b>142</b>	109	122	126	<b>126</b>

## Reactance & Time constants- Class H / 400V

Unsaturated (ref. EN60034-4)			ECP34 1S4 C	ECP34 2S4 C	ECP34 1M4 C	ECP34 2M4 C	ECP34 1L4 C	ECP34 2L4 C
<b>X<sub>d</sub></b>	Direct-axis synchronous reactance	%	324	241,2	281,3	327,6	225,3	220,4
<b>X'<sub>d</sub></b>	Direct-axis transient reactance	%	22,3	18,4	21,5	22,8	13,9	18,2
<b>X''<sub>d</sub></b>	Direct-axis subtransient reactance	%	7,4	6	7	11,1	5,8	7,7
<b>X<sub>q</sub></b>	Quadrature-axis synchronous reactance	%	170,2	157	183,2	200,9	114,8	150,3
<b>X'<sub>q</sub></b>	Quadrature-axis transient reactance	%	170,2	157	183,2	200,9	114,8	150,3
<b>X''<sub>q</sub></b>	Quadrature-axis subtransient reactance	%	29,5	32,7	38,2	41,5	24,9	32,6
<b>X<sub>2</sub></b>	Negative-sequence reactance	%	17,8	18,8	22	25,7	14,8	19,5
<b>X<sub>0</sub></b>	Zero sequence reactance	%	3,59	3,67	4,29	3,97	2,35	3,12
<b>Saturated</b>								
<b>X<sub>d</sub></b>	Direct-axis synchronous reactance	%	275,4	205	239,1	278,5	191,5	187,3
<b>X'<sub>d</sub></b>	Direct-axis transient reactance	%	19	15,6	18,3	19,4	11,8	15,5
<b>X''<sub>d</sub></b>	Direct-axis subtransient reactance	%	6,29	5,1	5,95	9,43	4,93	6,54
<b>X<sub>q</sub></b>	Quadrature-axis synchronous reactance	%	144,7	133,4	155,7	170,8	97,6	127,8
<b>X'<sub>q</sub></b>	Quadrature-axis transient reactance	%	144,7	133,4	155,7	170,8	97,6	127,8
<b>X''<sub>q</sub></b>	Quadrature-axis subtransient reactance	%	25,1	27,8	32,5	35,3	21,2	27,7
<b>X<sub>2</sub></b>	Negative-sequence reactance	%	15,1	16	18,7	21,8	12,6	16,6
<b>X<sub>0</sub></b>	Zero sequence reactance	%	3,59	3,67	4,29	3,97	2,35	3,12
<b>K<sub>cc</sub></b>	Short circuit ratio		0,36	0,49	0,42	0,36	0,52	0,53
<b>T'<sub>d</sub></b>	Transient time constant	sec	0,056	0,059	0,069	0,085	0,053	0,073
<b>T''<sub>d</sub></b>	Subtransient time constant	sec	0,012	0,014	0,017	0,019	0,011	0,014
<b>T'<sub>do</sub></b>	Open circuit time constant	sec	0,82	0,77	0,9	1,22	0,86	0,88
<b>T<sub>a</sub></b>	Armature time constant	sec	0,016	0,018	0,021	0,026	0,017	0,02

## Additional information - Class H / 400V

<b>I<sub>o</sub></b>	Excitation current at no load	A	0,7	0,5	0,6	0,5	0,7	0,6
<b>I<sub>c</sub></b>	Excitation current at full load	A	2,7	2,4	2,7	2,6	2,9	2,8
<b>Overload</b>								
Overload per 20 sec. PRP or 10 sec. COP						300		
Heat dissipation		W	5922	6957	8342	8254	8755	10088
Telephone Harmonic Factor - THF		%	<2	<2	<2	<2	<2	<2
Waveform Distors.(THD) full load LL/LN		%	2,3 / 2,3	2,2 / 2,3	2 / 2,2	1,8 / 2	1,8 / 1,9	1,9 / 2
Waveform Distors.(THD) no load LL/LN		%	2,5 / 2,9	2,9 / 3	2,8 / 3	2,7 / 3	2,7 / 2,9	2,7 / 2,9

## Reactance & Time constants- Class H / 480V







Unsaturated (ref. EN60034-4)			ECP34 1S4 C	ECP34 2S4 C	ECP34 1M4 C	ECP34 2M4 C	ECP34 1L4 C	ECP34 2L4 C
<b>X<sub>d</sub></b>	Direct-axis synchronous reactance	%	324	241,2	281,3	327,6	225,3	227,3
<b>X'<sub>d</sub></b>	Direct-axis transient reactance	%	22,3	18,4	21,5	22,8	13,9	18,8
<b>X''<sub>d</sub></b>	Direct-axis subtransient reactance	%	7,4	6	7	11,1	5,8	7,94
<b>X<sub>q</sub></b>	Quadrature-axis synchronous reactance	%	170,2	157	183,2	200,9	114,8	155
<b>X'<sub>q</sub></b>	Quadrature-axis transient reactance	%	170,2	157	183,2	200,9	114,8	155
<b>X''<sub>q</sub></b>	Quadrature-axis subtransient reactance	%	29,5	32,7	38,2	41,5	24,9	33,6
<b>X<sub>2</sub></b>	Negative-sequence reactance	%	17,8	18,8	22	25,7	14,8	20,1
<b>X<sub>0</sub></b>	Zero sequence reactance	%	3,59	3,67	4,29	3,97	2,35	3,22
<b>Saturated</b>								
<b>X<sub>d</sub></b>	Direct-axis synchronous reactance	%	275,4	205	239,1	278,5	191,5	193,2
<b>X'<sub>d</sub></b>	Direct-axis transient reactance	%	19	15,6	18,3	19,4	11,8	16
<b>X''<sub>d</sub></b>	Direct-axis subtransient reactance	%	6,29	5,1	5,95	9,43	4,93	6,75
<b>X<sub>q</sub></b>	Quadrature-axis synchronous reactance	%	144,7	133,4	155,7	170,8	97,6	131,8
<b>X'<sub>q</sub></b>	Quadrature-axis transient reactance	%	144,7	133,4	155,7	170,8	97,6	131,8
<b>X''<sub>q</sub></b>	Quadrature-axis subtransient reactance	%	25,1	27,8	32,5	35,3	21,2	28,6
<b>X<sub>2</sub></b>	Negative-sequence reactance	%	15,1	16	18,7	21,8	12,6	17,1
<b>X<sub>0</sub></b>	Zero sequence reactance	%	3,59	3,67	4,29	3,97	2,35	3,22
<b>K<sub>cc</sub></b>	Short circuit ratio		0,36	0,49	0,42	0,36	0,52	0,52
<b>T'<sub>d</sub></b>	Transient time constant	sec	0,056	0,059	0,069	0,085	0,053	0,073
<b>T''<sub>d</sub></b>	Subtransient time constant	sec	0,012	0,014	0,017	0,019	0,011	0,014
<b>T'<sub>do</sub></b>	Open circuit time constant	sec	0,82	0,77	0,9	1,22	0,86	0,88
<b>T<sub>a</sub></b>	Armature time constant	sec	0,016	0,018	0,021	0,026	0,017	0,02

## Additional information - Class H / 480V

<b>I<sub>o</sub></b>	Excitation current at no load	A	0,7	0,5	0,6	0,5	0,7	0,6
<b>I<sub>c</sub></b>	Excitation current at full load	A	2,7	2,4	2,7	2,6	2,9	2,8
<b>Overload</b>								
Overload per 20 sec. PRP or 10 sec. COP			300					
Heat dissipation		W	7603	8121	9730	9905	9846	10111
Telephone Interference Factor - TIF			<40	<40	<40	<40	<40	<40
Waveform Distors.(THD) full load LL/LN		%	2,3 / 2,3	2,2 / 2,3	2 / 2,2	1,8 / 2	1,8 / 1,9	1,9 / 2
Waveform Distors.(THD) no load LL/LN		%	2,5 / 2,9	2,9 / 3	2,8 / 3	2,7 / 3	2,7 / 2,9	2,7 / 2,9







## Efficiencies @ 50Hz

Models		380V 50Hz					400V 50Hz					415V 50Hz					440V 50Hz				
		0.25	0.5	0.75	1	1.1	0.25	0.5	0.75	1	1.1	0.25	0.5	0.75	1	1.1	0.25	0.5	0.75	1	1.1
ECP34 1S4 C	%	90,1	92,2	92,5	92,3	92,1	89,8	92,2	92,6	92,2	91,9	89,6	92,2	92,6	92,0	91,7	89,5	91,9	92,1	91,6	91,3
ECP34 2S4 C	%	91,1	92,6	92,5	92,1	91,9	90,8	92,6	92,6	92,0	91,7	90,6	92,6	92,6	91,8	91,4	90,5	92,3	92,1	91,4	91,1
ECP34 1M4 C	%	91,2	93,0	92,8	92,2	92,0	91,3	93,2	93,1	92,3	92,0	91,1	93,1	92,9	92,0	91,7	90,8	92,8	92,4	91,5	91,2
ECP34 2M4 C	%	91,9	93,3	93,2	92,8	92,5	92,0	93,5	93,5	92,9	92,5	91,8	93,4	93,3	92,6	92,2	91,7	93,2	92,9	92,2	91,8
ECP34 1L4 C	%	93,0	93,5	93,5	93,1	92,8	92,9	93,7	93,7	93,2	92,9	92,5	93,5	93,5	92,8	92,5	92,5	93,3	93,1	92,5	92,2
ECP34 2L4 C	%	93,9	94,1	93,5	92,9	92,5	93,6	94,1	93,6	92,9	92,5	93,4	94,1	93,5	92,6	92,2	93,3	93,8	93,1	92,3	91,9

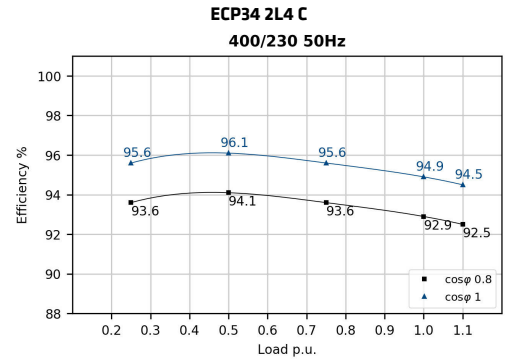
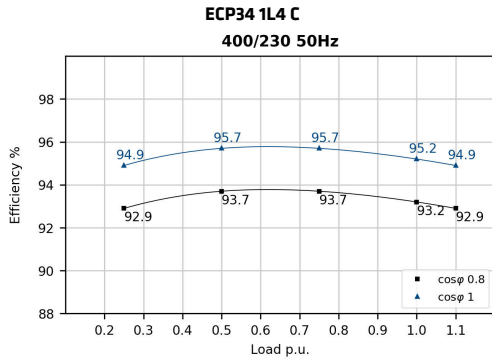
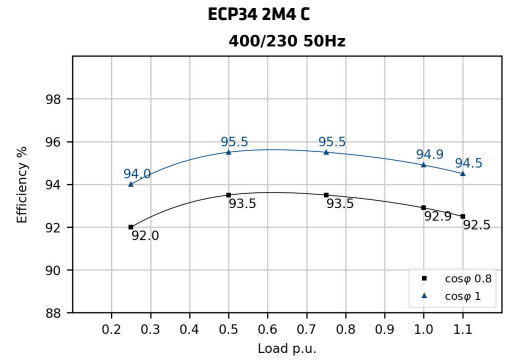
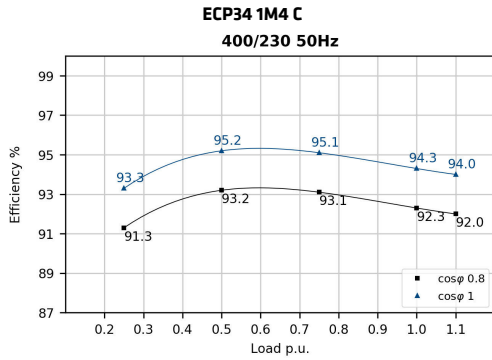
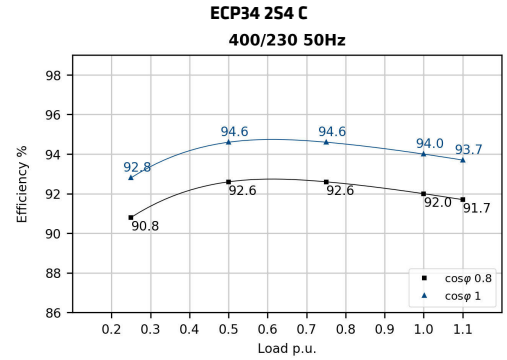
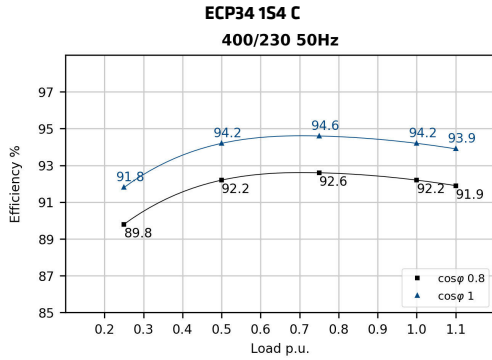


## Efficiencies @ 60Hz

Models		415V 60Hz					440V 60Hz					460V 60Hz					480V 60Hz					
		0.25	0.5	0.75	1	1.1	0.25	0.5	0.75	1	1.1	0.25	0.5	0.75	1	1.1	0.25	0.5	0.75	1	1.1	
ECP34 1S4 C	%	91,6	93,2	92,8	91,1	90,3	91,6	93,3	92,9	91,5	91,0	91,6	93,4	93,2	91,8	91,3	91,3	93,4	93,2	91,7	91,1	91,1
ECP34 2S4 C	%	92,1	93,7	93,1	91,6	90,6	92,1	93,8	93,2	92,1	91,4	92,1	93,9	93,5	92,3	91,5	91,8	93,9	93,5	92,2	91,5	91,5
ECP34 1M4 C	%	92,5	94,0	93,3	91,7	91,0	92,6	94,2	93,7	92,1	91,2	92,6	94,3	94,0	92,4	91,7	92,5	94,5	94,1	92,5	91,8	91,8
ECP34 2M4 C	%	92,9	94,4	93,6	92,0	91,3	93,1	94,7	94,1	92,5	91,8	93,1	94,8	94,4	92,8	92,0	93,0	95,0	94,5	92,9	92,2	92,2
ECP34 1L4 C	%	94,0	95,0	94,1	92,9	92,5	94,0	95,1	94,4	93,3	92,9	93,9	95,1	94,4	93,5	93,1	93,8	95,3	94,6	93,6	93,2	93,2
ECP34 2L4 C	%	95,2	95,5	94,6	93,4	92,8	95,2	95,6	94,8	93,8	93,3	95,2	95,7	94,9	94,0	93,4	94,9	95,7	95,0	94,0	93,5	93,5

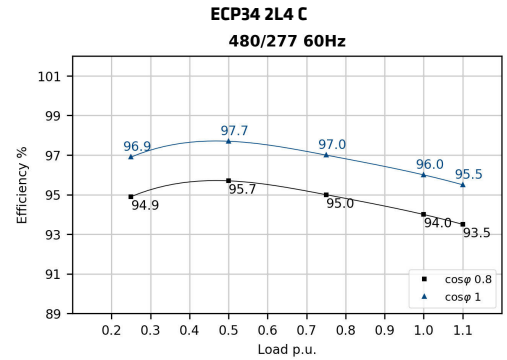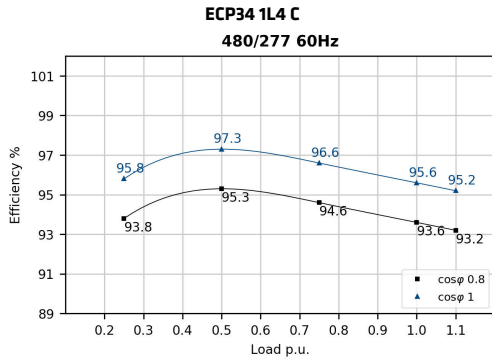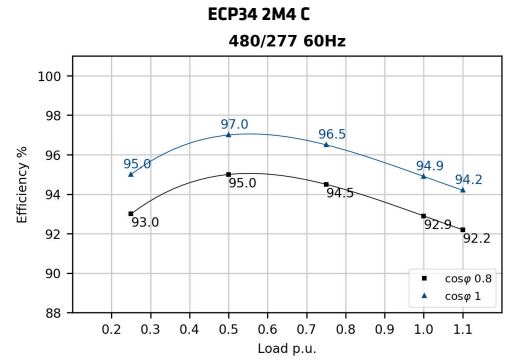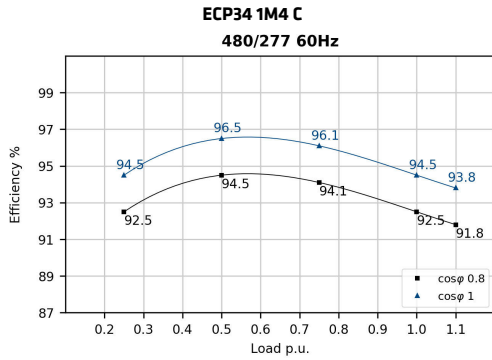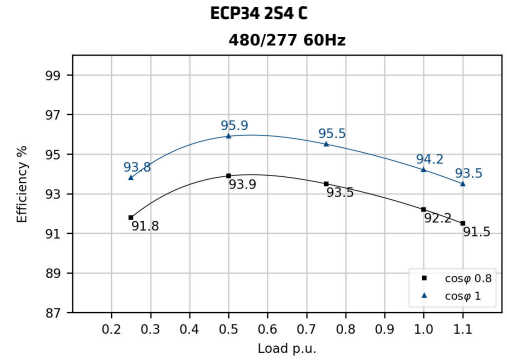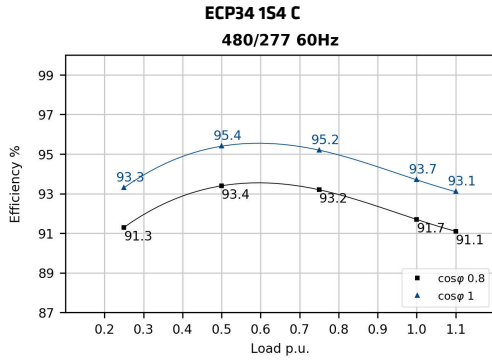

Transients voltage

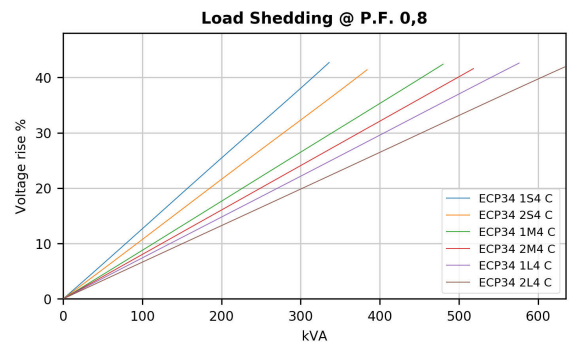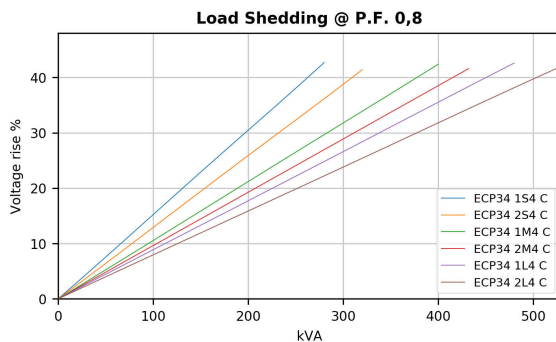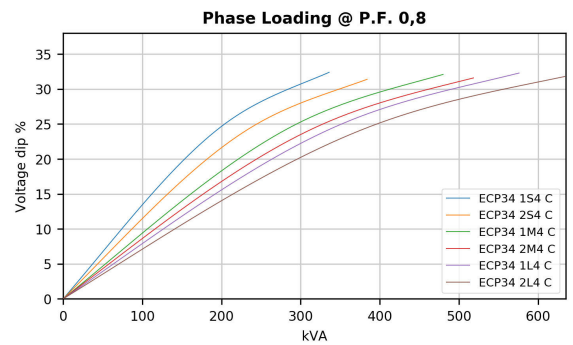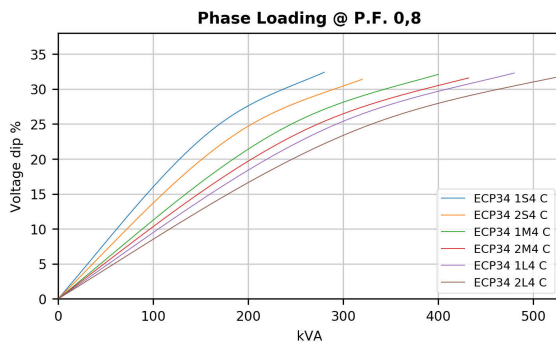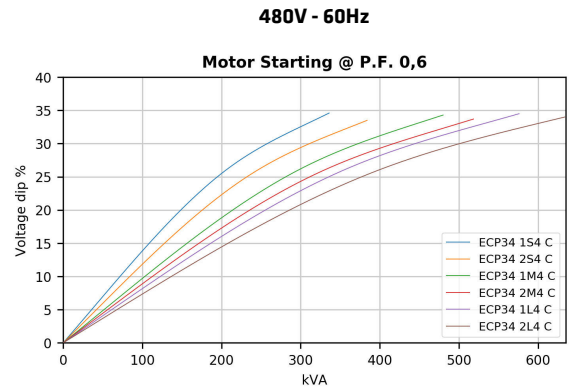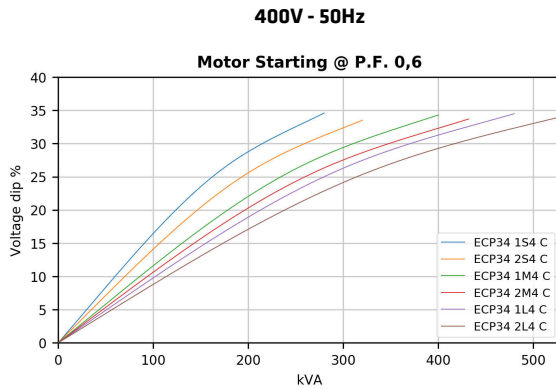

In order to scale transient curves as a function of a power factor or voltage if not indicated, please proceed as follows:

Power Factor coefficient corrector (PFCC), to be used on power factor 0.6 curves:

$$PFCC = \frac{\sin(\text{ARCCos}(PF_{\text{new}}))}{0.8}$$

Example. The PFCC at power factor 0.3 is 1.192 [  $PFCC = \frac{\sin(\text{ARCCos}(0.3))}{0.8}$  ]. This means that the voltage fall at a given power at pf 0.3 is equivalent to the one that can be read on the pf 0.6 curve if the load is considered 1.192 times bigger (19% higher value. ).

In this example, a 100 kVA load insertion at pf 0.3 is equivalent in voltage fall to a 119kVA load insertion at pf 0.6.

Voltage coefficient corrector (VCC):


$$VCC = \left(\frac{400}{V_{\text{new}}}\right)^2 \text{ if } 50 \text{ Hz}; \quad VCC = \left(\frac{480}{V_{\text{new}}}\right)^2 \text{ if } 60 \text{ Hz}$$

Example. VCC at 415V 60 Hz is 1.338 [  $VCC = \left(\frac{480}{415}\right)^2$  ]. This means that the voltage fall at a given power at 415V is equivalent to the one that can be read on the power factor 0.6 curve if the load is considered 1.338 times bigger (33% higher value. ).


In this example, a 100 kVA load insertion at 415V is equivalent in voltage fall to a 133kVA load insertion at 480V.

50Hz Short circuit decrement curves - No load excitation at rated speed


ECP34 1S4 C

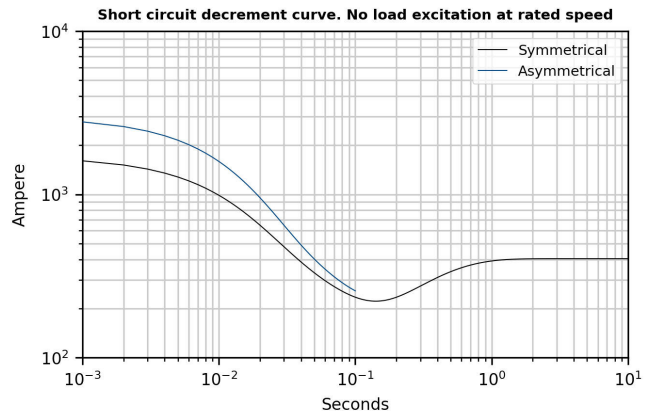


ECP34 2S4 C

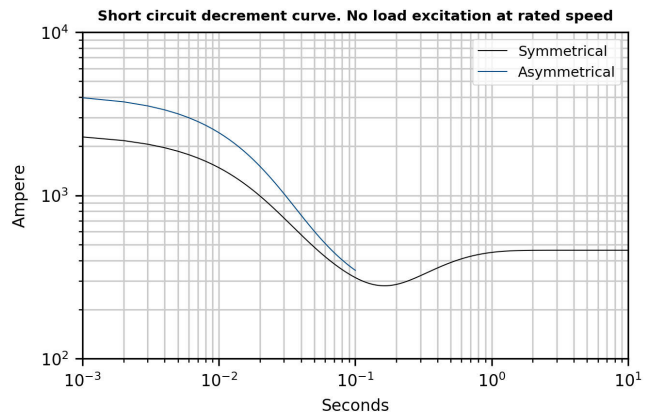

ECP34 1M4 C

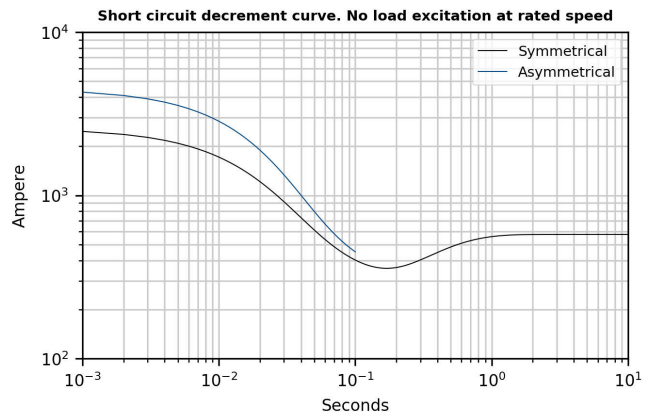


ECP34 2M4 C

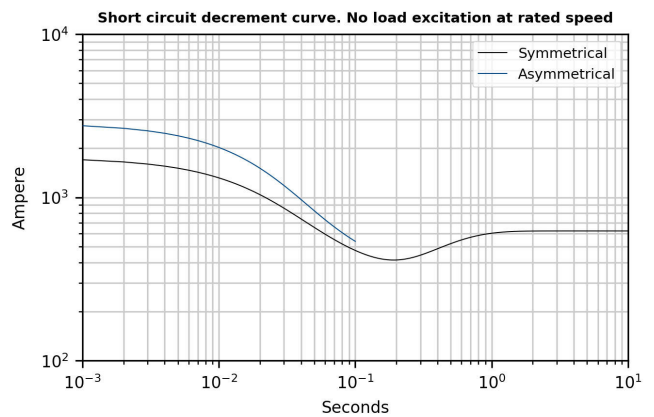


\*Please refer to tables at page 6

50Hz Short circuit decrement curves - No load excitation at rated speed

ECP34 1L4 C

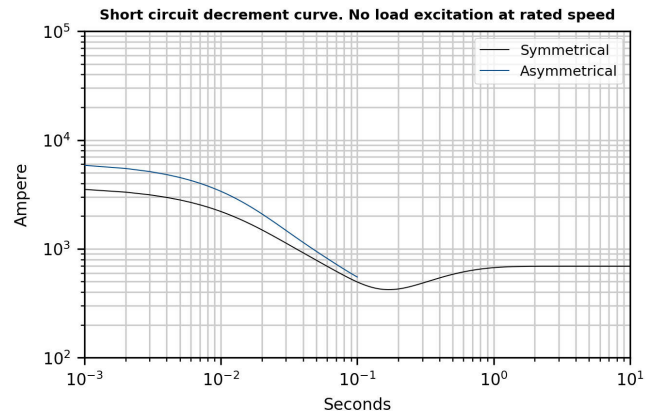


ECP34 2L4 C

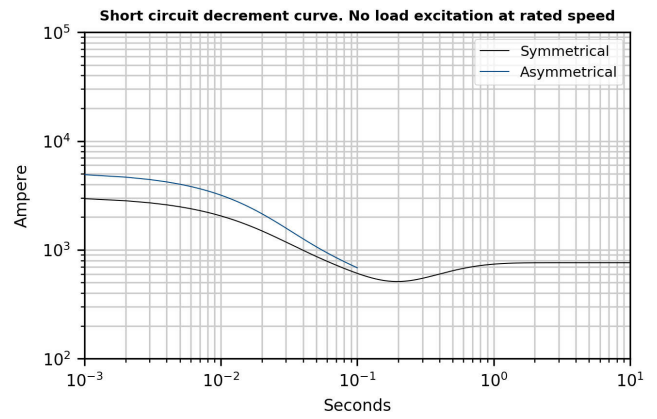


\*Please refer to tables at page 6

60Hz Short circuit decrement curves - No load excitation at rated speed


ECP34 1S4 C

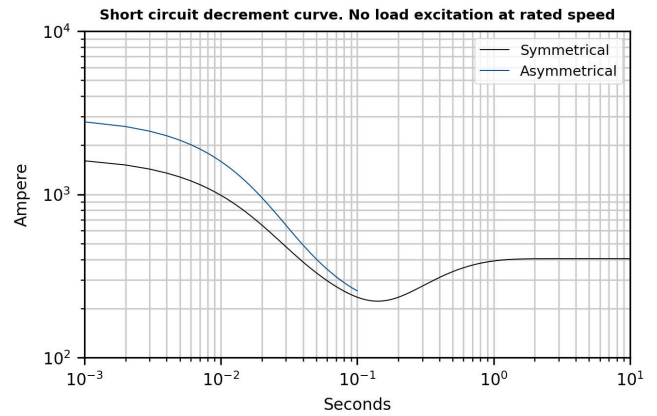


ECP34 2S4 C

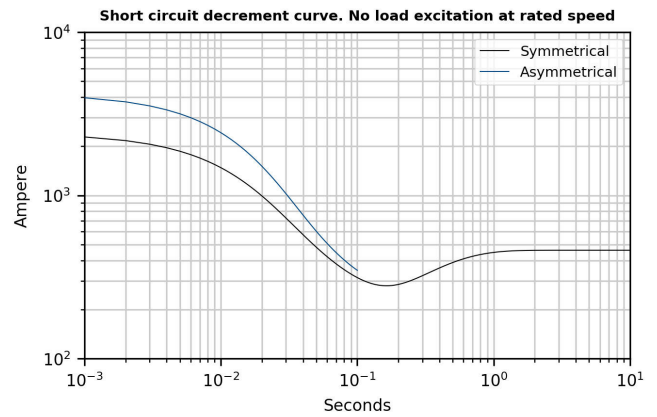

ECP34 1M4 C

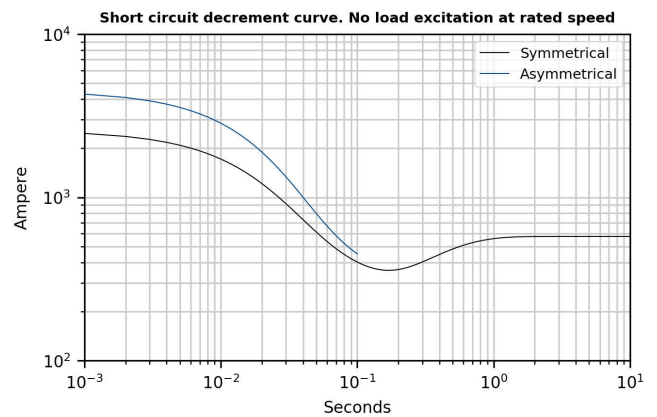


ECP34 2M4 C

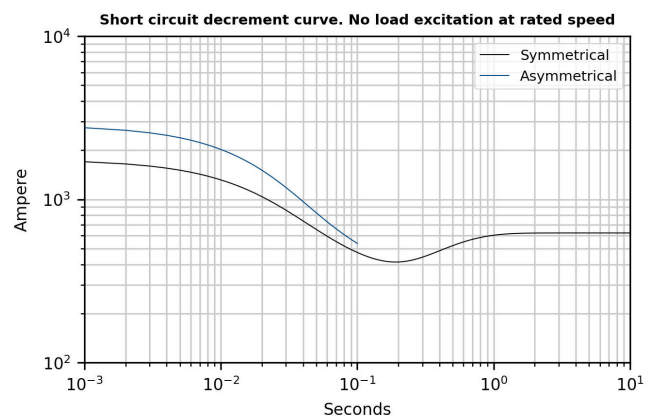


\*Please refer to tables at page 6

60Hz Short circuit decrement curves - No load excitation at rated speed

ECP34 1L4 C

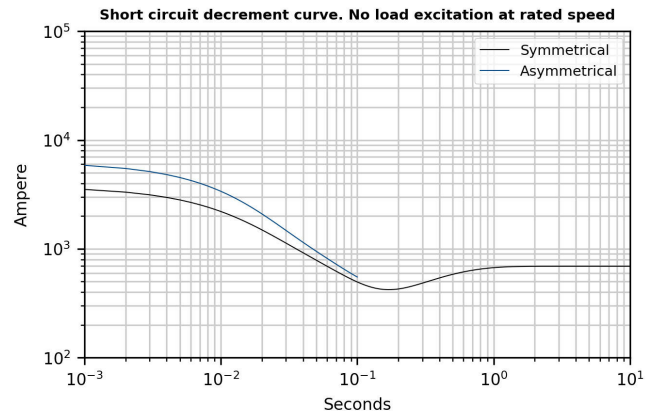

ECP34 2L4 C

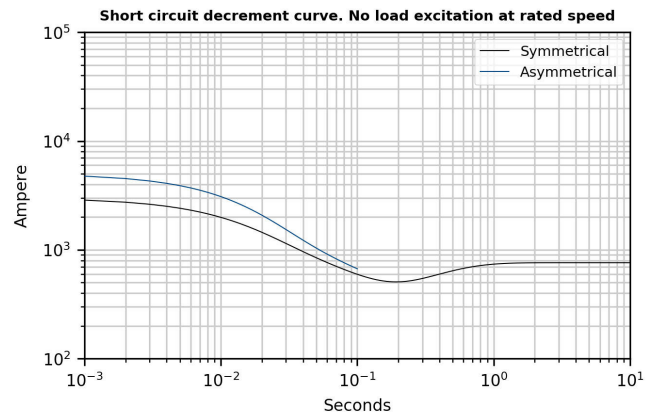


\*Please refer to tables at page 6

### Additional Characteristics

Data	ECP34 1S4 C		ECP34 2S4 C		ECP34 1M4 C		ECP34 2M4 C		ECP34 1L4 C		ECP34 2L4 C		
	50Hz	60Hz	50Hz	60Hz	50Hz	60Hz	50Hz	60Hz	50Hz	60Hz	50Hz	60Hz	
Damper cage	Aluminium												
Single stator coil resistance (20°C)	Ω	0,033		0,027		0,021		0,02		0,014		0,015	
Rotor Winding Resistance (20°C)	Ω	2,392		2,844		3,09		3,172		3,467		3,624	
Stator Exciter Resistance (20°C)	Ω	13,47		13,47		13,47		13,47		13,47		13,47	
Rotor Exciter Resistance (20°C)	Ω	0,36		0,36		0,36		0,36		0,36		0,36	
Auxiliary Winding Resistance (20°C)	Ω	1,43		1,35		1,35		1,18		1,05		0,855	
Weight of complete generator	kg	302,0		349,0		370,0		388,0		423,0		440,0	
Unbalanced magnetic pull	kN/mm	4,8		5,1		5,3		5,4		5,5		5,4	
Air flow	m <sup>3</sup> /min	29,2	34,4	29,2	34,4	29,2	34,4	29,2	34,4	29,2	34,4	29,2	34,4
Noise level at 1m/7m	dB(A)	79/65	83/69	79/65	83/69	79/65	83/69	79/65	83/69	79/65	83/69	79/65	83/69


### PQ Diagram

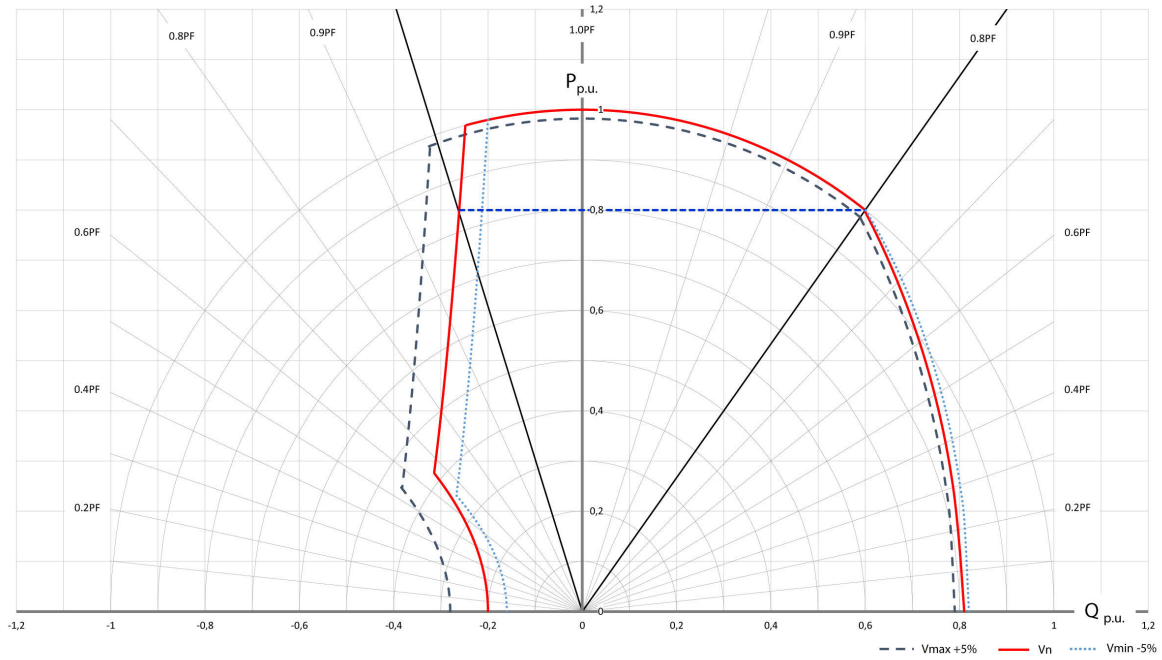

\* The PQ diagram above refers to three-phase application only.



MOMENTS OF INERTIA - SINGLE BEARING

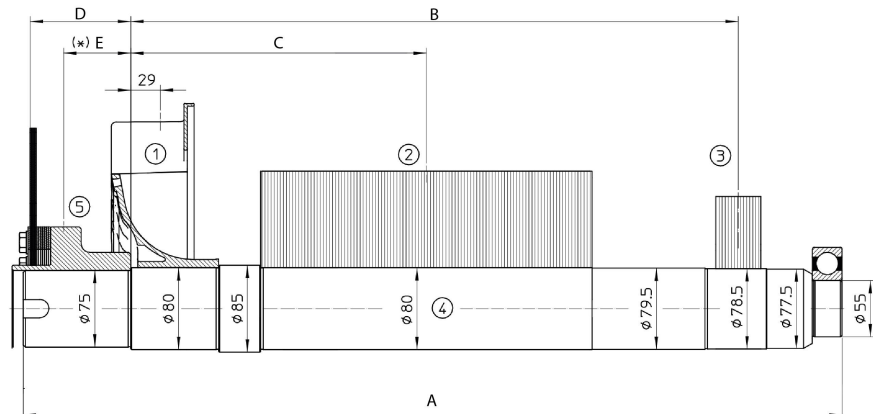

POS. COMPONENT	1 FAN		2 MAIN ROTOR		3 EXCITER ROTOR		4 SHAFT		TOTAL	DIMENSION TYPE	A [mm]	B [mm]	C [mm]	SAE N°	5 SHAFTS COUPLING FLEX PLATE	D	E	WEIGHT [kg]	J [kgm <sup>2</sup> ]		
	WEIGHT [kg]	J [kgm <sup>2</sup> ]	WEIGHT [kg]	J [kgm <sup>2</sup> ]	WEIGHT [kg]	J [kgm <sup>2</sup> ]	WEIGHT [kg]	J [kgm <sup>2</sup> ]												D	E
ECP34 1S4 C	1,4	0,0211	61,7	0,5625	11,7	0,0798	26,5	0,0209	101,3	0,6843	ECP34 1S4 C	705,5	499	269	10	112,8	79	12,1	0,0747		
ECP34 2S4 C			78,6	0,7148			26,5	0,0209	118,2	0,8366	ECP34 2S4 C	745,5	539	266,5	11 1/2	98,4	73,6	11	0,0932		
ECP34 1M4 C			88,1	0,8009			28,1	0,0222	129,3	0,924	ECP34 1M4 C	800,5	594	299	14	84,4	70	13,4	0,2336		
ECP34 2M4 C			91,4	0,8311			28,1	0,0222	132,6	0,9542	ECP34 2M4 C										
ECP34 1L4 C			102,3	0,9293			30,5	0,024	145,9	1,0542	ECP34 1L4 C										
ECP34 2L4 C	108,5	0,9851	30,5	0,024	152,1	1,11	ECP34 2L4 C														

B0931\_01\_ECP34C\_MD35

SAE N.	d	L	Q1	S1	α1
10	314.32	53.8	295.27	11	45°
11 1/2	352.42	39.6	333.37	11	45°
14	466.72	25.4	438.15	14	45°

SERIE	MODELLO	A	B	I	C.G.
ECP34	1S4 C				344
	2S4 C	676	786	351	325
	1M4 C	716	826	391	344
	2M4 C				379
	2L4 C	771	881	446	371

SAE N.	Ø	P	Q	α
3	455	409.6	428.6	30°
2	492	447.7	466.7	30°
1	555	511.2	530.2	30°

**1** COPERCHIO REMOVIBILE PER ACCESSO AL TERMINALI PRINCIPALI  
REMOVABLE COVER FOR ACCESS TO MAIN TERMINALS

**2** PANNELLO REMOVIBILE PER ACCESSO AL REGOLATORE  
REMOVABLE PANEL FOR ACCESS TO AVR

**3** FORO STANDARD PER INGRESSO CAVI Ø80  
STANDARD HOLE ON FRONT FOR CABLE ENTRY Ø80

**4** PRE-TAGLIO SU PANNELLO PRINCIPALE PER INGRESSO CAVI Ø80  
PRE-CUT ON MAIN PANEL FOR CABLE ENTRY Ø80

**5** PRE-TAGLIO SU PANNELLO LATERALE PER INGRESSO CAVI Ø28  
PRE-CUT ON LATERAL PANEL FOR CABLE ENTRY Ø28

**6** VITE M8 PER MESSA A TERRA  
SCREW M8 FOR GROUNDING

**7** CENTRO DI GRAVITA' IN CONFIGURAZIONE SAE 3 VOLANO 11 1/2  
GRAVITY CENTER IN CONFIGURATION SAE 3 FLYWHEEL 11 1/2

FLANGE / LANGE BRIDE / FLANSCH

SAE N.	Ø	P	Q	α
3	455	409.6	428.6	30°
2	492	447.7	466.7	30°
1	555	511.2	530.2	30°

UN EN 22788/1-2 v-L ECP 34C 4 STANDARD B0931 04

meccalte DIMENSIONI DI INGOMBRO FORMA MD35 MD35 COUPLING OVERALL DIMENSIONS

SCALE 1:6

REVISIONE / REVISIONE PFD00086

CLP00126



---

**Mecc Alte SpA (HQ)**

Via Roma  
20 - 36051 Creazzo  
Vicenza - ITALY  
T: +39 0444 396111  
E: info@meccalte.it  
aftersales@meccalte.it

---

**Mecc Alte Portable**

Via Roma  
20 - 36051 Creazzo  
Vicenza - ITALY  
T: +39 0444 396111  
E: info@meccalte.it

---

**Mecc Alte Power Products srl**

Via Melaro  
2 - 36075 Montecchio  
Maggiore (VI) - ITALY  
T: +39 0444 1831295  
E: info@meccalte.it

---

**Zanardi Alternatori srl**

Via Dei Laghi  
48/B - 36077 Altavilla  
Vicenza - ITALY  
T: +39 0444 370799  
E: info@zanardialternatori.it

---

**United Kingdom**

Mecc Alte U.K. LTD  
6 Lands' End Way  
Oakham  
Rutland LE15 6RF  
T: +44 (0) 1572 771160  
E: info@meccalte.co.uk

---

**Spain**

Mecc Alte España S.A.  
C/ Rio Taibilla, 2  
Polig. Ind. Los Valeros  
03178 Benijofar (Alicante)  
T: +34 (0) 96 6702152  
E: info@meccalte.es

---

**China**

Mecc Alte Alternator Haimen LTD  
755 Nanghai East Rd  
Jiangsu HEDZ 226100 PRC  
T: +86 (0) 513 82325758  
E: info@meccalte.cn

---

**India**

Mecc Alte India PVT LTD  
Plot NO: 1, Sanaswadi  
Talegaon  
Dhamdhare Road Taluka:  
Shirur, District:  
Pune - 412208  
Maharashtra, India  
T: +91 2137 619600  
E: info@meccalte.in

---

**U.S.A. and Canada**

Mecc Alte Inc.  
1229 Adams Drive  
McHenry, IL, 60051  
T: +1 815 344 0530  
E: info@meccalte.us

---

**Germany**

Mecc Alte Generatoren GmbH  
Bucher Hang 2  
D-87448 Waltenhofen  
T: +49 (0)831 540755 0  
E: info@meccalte.de

---

**Australia**

Mecc Alte Alternators PTY LTD  
10 Duncan Road, PO Box 1046  
Dry Creek, 5094, South  
Australia  
T: +61 (0) 8 8349 8422  
E: info@meccalte.com.au

---

**France**

Mecc Alte International S.A.  
Z.E.La Gagnerie  
16330 ST.Amant de Boixe  
T: +33 (0) 545 397562  
E: info@meccalte.fr

---

**Far East**

Mecc Alte (F.E.) PTE LTD  
19 Kian Teck Drive  
Singapore 628836  
T: +65 62 657122  
E: info@meccalte.com.sg



[www.meccalte.com](http://www.meccalte.com)