

ES16F

MECCALTE spa - Via Roma, 20 - 36051 CREAZZO (VI) ITALY
Tel. +39 0444/396111 - Fax +39 0444/396166 - e-mail: info@meccalte.it
website: www.meccalte.com

2 POLE
1 PHASE

BRUSH + AVR

IP23

CHARACTERISTICS

1 p.f.

Type	115/230V 50Hz 3000 RPM						120/240V 60Hz 3600 RPM						Weight	J	T.H.D.
	kVA	η 4/4	Stand by (ΔT=163°C) T.amb. 27°C	Air volume	Noise		kVA	η 4/4	Stand by (ΔT=163°C) T.amb. 27°C	Air volume	Noise				
	cl. H	%	kVA	m³/min	7m dB(A)	1m dB(A)	cl. H	%	kVA	m³/min	7m dB(A)	1m dB(A)			
ES16F-130	4,5	79,4	5	3,4	60	78	5,5	80	6	4,3	62	80	25,8	0,0129	< 6
ES16F-160	5,5	79,8	6	3,4	60	78	6,8	80,5	7,5	4,3	62	80	29,8	0,0156	< 6

0,8 p.f.




ES16F-130	4	77,4	4,5	3,4	60	78	5	78	5,4	4,3	62	80	25,8	0,0129	< 6
ES16F-160	5	77,8	5,4	3,4	60	78	6	78,5	6,7	4,3	62	80	29,8	0,0156	< 6

Type	3000 RPM 115-230V 50 Hz				3600 RPM 120-240V 60 Hz			
	kVA	Stator	Rotor	Aux	kVA	Stator	Rotor	Aux
		Ω	Ω	Ω		Ω	Ω	Ω
ES16F-130	4,5	1,010	7,57	1,40	5,5	0,670	7,57	1,150
ES16F-160	5,5	0,750	8,37	1,10	6,8	0,510	8,38	0,920

OVERALL DIMENSIONS



dimensions in mm.

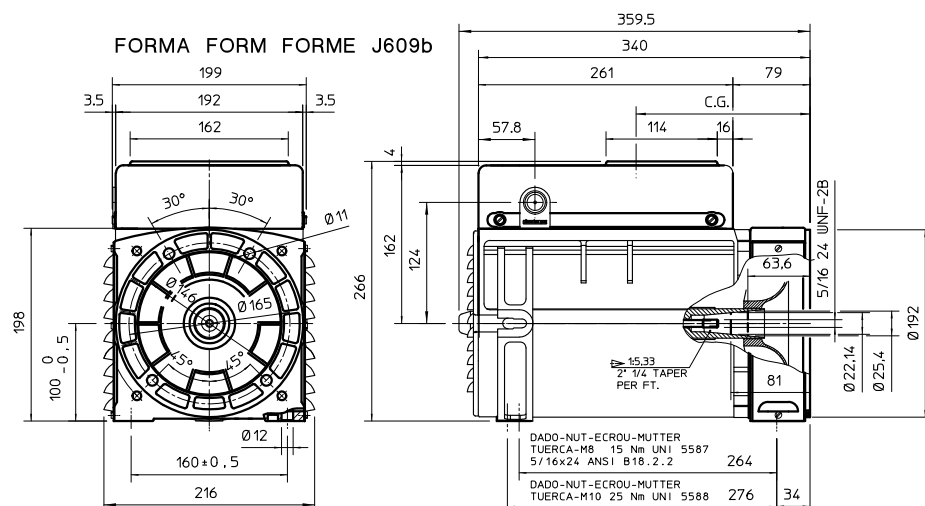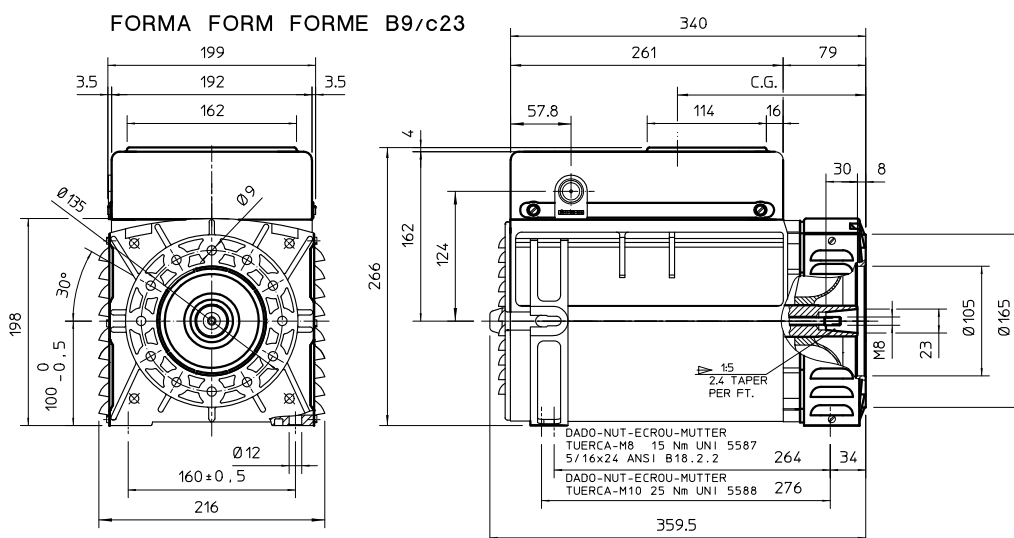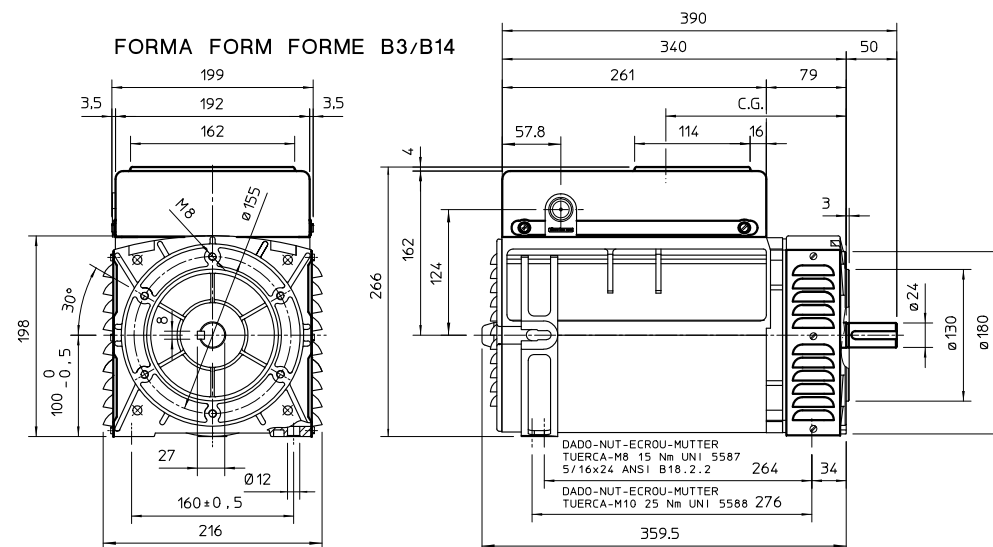

FORM	CG	
	150	180
B14	178	163
B9	180	165
J609b	179	164